




HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

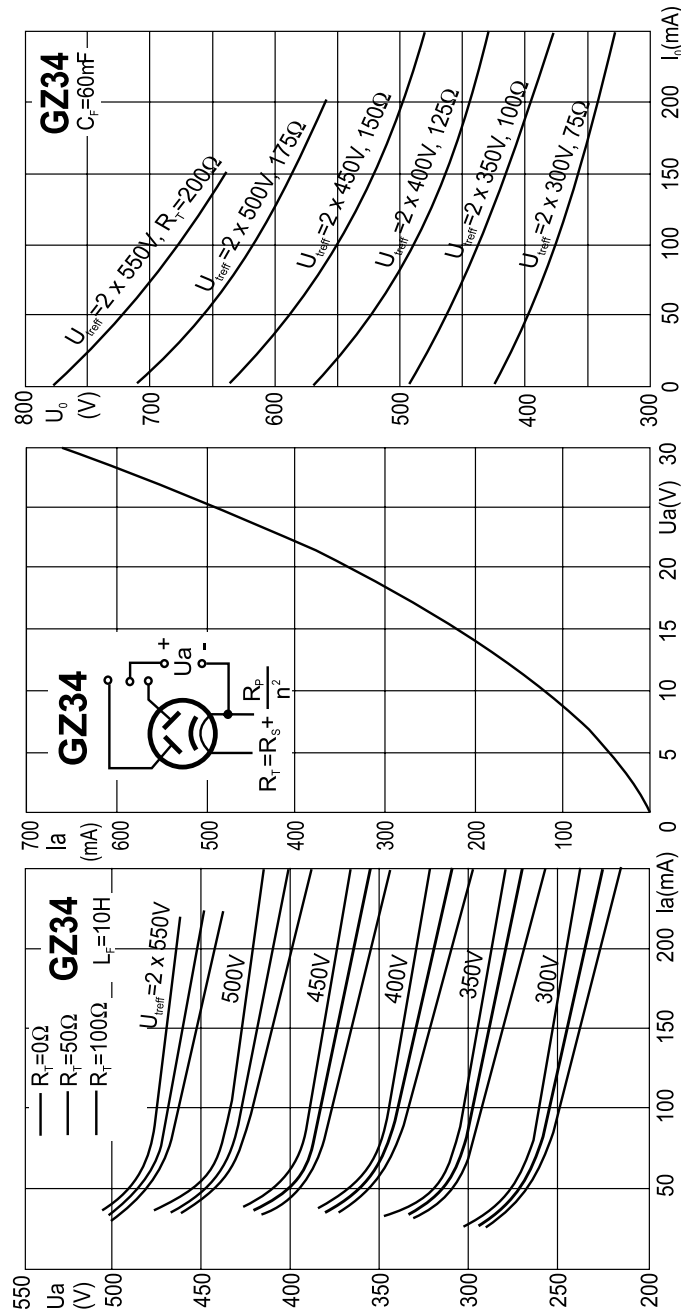

GZ 34 S

DOUBLE ANODE RECTIFYING TUBE

Base: OCTAL

$$U_f = 5 \text{ V}$$

$$I_f = 1,9 \text{ A}$$

Typical characteristic:

Capacitor input

f	=	50 Hz			
U _{treff}	=	2x300	2x400	2x500	2x550 V
I ₋	=	250	250	200	160 mA
C	=	60	60	60	60 μF
R _t	=	2x75	2x125	2x175	2x200 Ω
U ₋	=	330	430	560	640 V

Choke input

f	=	50 Hz			
U _{treff}	=	2x300	2x400	2x500	2x550 V
I ₋	=	250	250	250	225 mA
L	=	10	10	10	10 H
R _t	=	0	0	0	0 Ω
U ₋	=	250	330	420	465 V

Limiting values:

Capacitor input

f	=	50Hz	
-U _{a invp}	=	1500 V	
I _{a invp}	=	750 mA	
C	=	60 μF	
U _{treff}	=	2x300	2x550 V
I ₋	=	250	160 mA
R _t	=	2x50	2x175 Ω

Choke input

f	=	50Hz	
-U _{a invp}	=	1500 V	
I _{a invp}	=	750 mA	
U _{treff}	=	2x300	2x550 V
I ₋	=	250	225 mA

Dimension and connections:

