




**HESTORE.HU**

elektronikai alkatrész áruház

**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

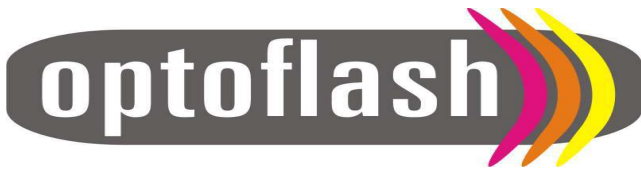

# SMD LIGHT RIBBON

OF-LRS3528Y

OF-LRS3528YL YELLOW




**ATTENTION**  
OBSERVE PRECAUTIONS  
FOR HANDLING  
ELECTROSTATIC  
DISCHARGE  
SENSITIVE  
DEVICES



## Features

- 500MMX8MM SMD LIGHT RIBBON ( 30-LED )
- PRINTED CIRCUIT BOARD THICKNESS : 0.2MM
- WORKING VOLTAGE : 12V DC.
- WORKING CURRENT : 200MA.
- LED VIEW ANGLE(2θ1/2):120°.
- PACKAGE: 10PCS / REEL.

## Package Dimensions :

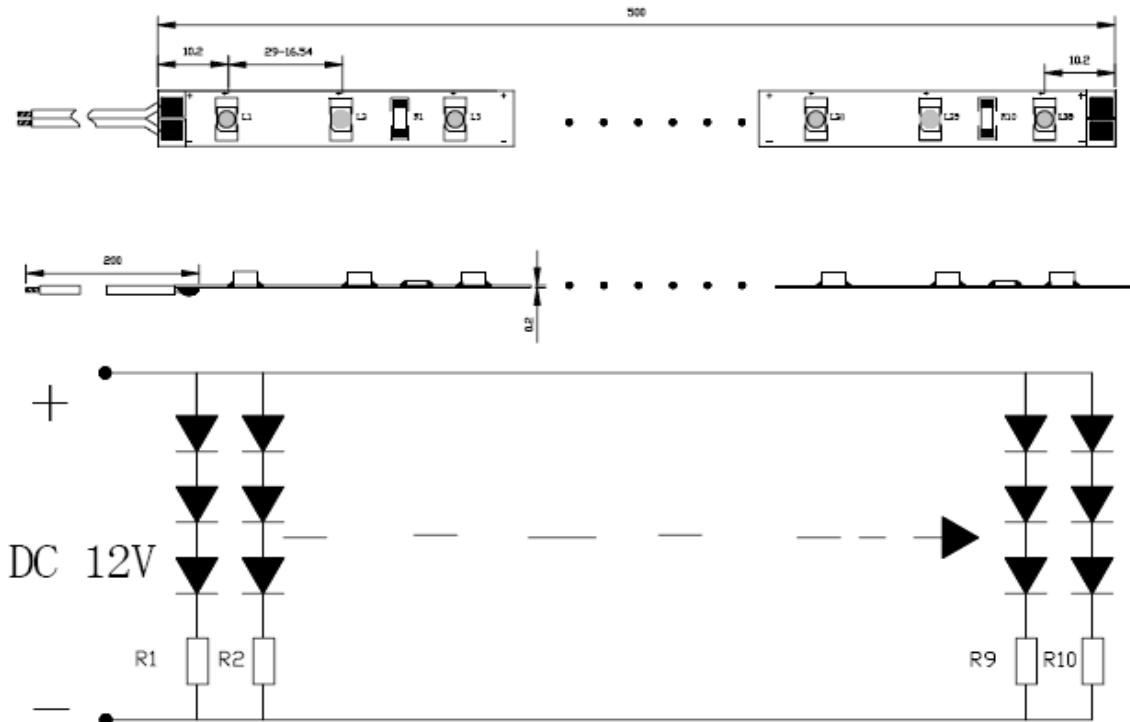

## Notes:

1. All dimension units are millimeters.
2. All dimension tolerance is  $\pm 1$ mm unless otherwise noted.



## SMD LIGHT RIBBON

### Absolute Maximum Rating at TA=25°C

Parameter	Symbol	Absolute Maximum Rating	Unit
Forward Current	IF	200	mA
Power Dissipation	PD	2,4	W
Electrostatic discharge	ESD	2000	V
Operating Temperature	Tstg	-25 ~ +60	°C
Storage Temperature	Tstg	- 40 ~ + 80	°C

### Electrical / Optical Characteristics at TA=25°C

Parameter	Symbol	Condition	Min	Typ	Unit
Forward Voltage DC	VF	IF=200mA		12	V
Dominant Wavelength	$\lambda D$	IF=200mA	586	590	nm
Luminous flux OF-LRS3528Y	$\phi V$	IF=200mA		40	lm
Luminous flux OF-LRS3528YL	$\phi V$	IF=200mA		30	lm
Recommend Forward Current	IF(rec)	IF=200mA		200	mA

Notes:Tolerance of measurement of luminous intensity $\pm$ 15%.

### Package means



### APPLICATIONS

- EDGE-LIGHTING OF TRANSPARENT OR DIFFUSED MATERIALS.
- PATH&CONTOUR MARKING.
- ILLUMINATED SIGNS.
- MOOD LIGHTING .