



HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.




High voltage power switch.

designed for horizontal deflection output stage of CTV receivers and high voltage, fast switching and industrial application.

Features:

- Collector-emitter sustaining voltage - 100mA.
- $V_{CEO(sus)} = 400V$ (minimum).
- Optimum drive condition curves.

TO-3

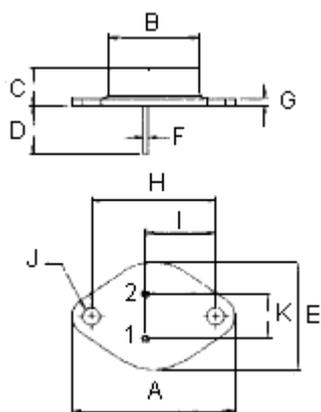


Pin 1. Base
2. Emitter
Collector (Case)

Dimensions	Minimum	Maximum
A	38.75	39.96
B	19.28	22.23
C	7.96	9.28
D	11.18	12.19
E	25.20	26.67
F	0.92	1.09
G	1.38	1.62
H	29.90	30.40
I	16.64	17.30
J	3.88	4.36
K	10.67	11.18

Dimensions : Millimetres

**NPN
BUY69A**

10 Ampere
Silicon Power
Transistors
200 - 400 Volts
100 Watts



TO-3


Maximum Ratings

Characteristic	Symbol	BUY69A	Unit
Collector-Emitter Voltage ($V_{BE} = 0$)	V_{CBS}	1000	V
Collector-Emitter Voltage	V_{CEO}	400	
Emitter-Base Voltage	V_{EBO}	8.0	
Collector Current-Continuous -Peak	I_C I_{CM}	10 15	A
Base Current-Peak	I_B	3.0	
Total Power Dissipation at $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	100 0.57	W W/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-65 to +200	$^\circ\text{C}$

Thermal Characteristics

Characteristic	Symbol	Maximum	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	1.75	$^\circ\text{C}/\text{W}$

Power Derating

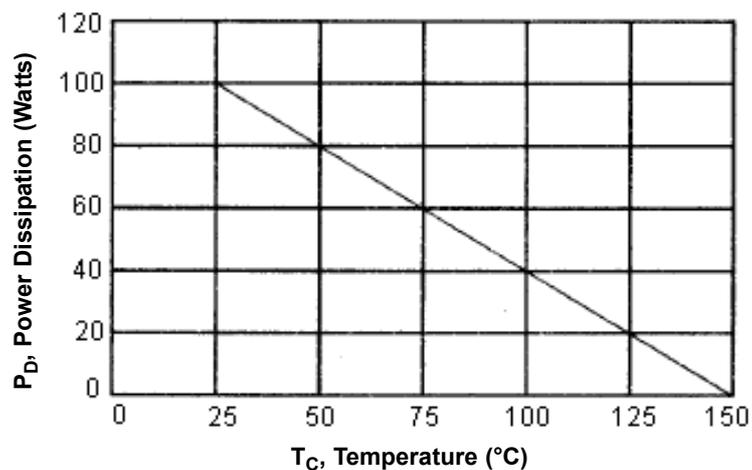

Electrical Characteristics ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Minimum	Maximum	Unit
Off Characteristics				
Collector-Emitter Sustaining Voltage (1) ($I_C = 100\text{mA}$, $I_B = 0$)	BUY69A $V_{CEO(sus)}$	400	-	V
Collector-Base Voltage ($I_C = 1.0\text{mA}$, $I_E = 0$)	BUY69A V_{CBO}	1000	-	
Collector Cut off Current ($V_{CE} = 1000\text{V}$, $V_{BE} = 0$)	BUY69A I_{CES}	-	1.0	mA
Emitter-Base Cut off Current ($V_{EB} = 8.0\text{V}$, $I_C = 0$)	I_{EBO}	-		
On Characteristics (1)				
DC Current Gain ($V_{CE} = 10\text{V}$, $I_C = 2.5\text{A}$)	h_{FE}	15	-	-
Collector-Emitter Saturation Voltage ($I_C = 8.0\text{A}$, $I_B = 2.5\text{A}$)	$V_{CE(sat)}$	-	3.3	V
Base-Emitter Saturation Voltage ($I_C = 8.0\text{A}$, $I_B = 2.5\text{A}$)	$V_{BE(sat)}$	-	2.2	
Dynamic Characteristics				
Current Gain-Bandwidth Product (2) ($I_C = 500\text{mA}$, $V_{CE} = 10\text{V}$, $f = 1\text{MHz}$)	f_T	10	-	MHz

Switching Characteristics					
Rise Time	$V_{CC} = 250\text{V}$, $I_C = 5\text{A}$	t_r	-	0.3	μs
Storage Time	$I_{B1} = -I_{B2} = 1.0\text{A}$	t_s	-	1.8	
Fall Time	-	t_f	-	1.0	

(1) Pulse Test : Pulse Width = $300\mu\text{s}$, Duty Cycle $\leq 2.0\%$.

$$(2) f_T = |h_{fe}| \cdot f_{test}$$

Part Number Table

Description	Part Number
Transistor, NPN, TO-3	BUY69A

Disclaimer This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. SPC Multicomp is the registered trademark of the Group. © Premier Farnell plc 2008.