**EN:** This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

# KEMET Part Number: R46KN333000N0K

Capacitor, Film, Metallized Polypropylene, 0.33 uF, +/-10% Tol, -40/+110C, Safety: X2, 275 VAC, Lead Spacing=22.5 mm

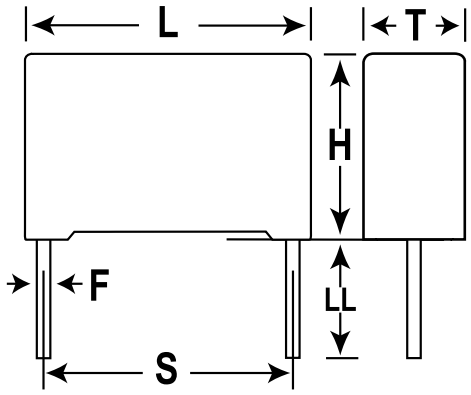


| General Information | |
|---|---|
| **Supplier:** | KEMET |
| **Dielectric:** | Metallized Polypropylene |
| **Application:** | Safety: X2 |
| **Style:** | Radial Box |
| **Lead Form:** | cut |
| **Features:** | Pulse |
| **Approvals:** | ENEC,UL,cUL,CQC |
| **RoHS:** | Yes |

| Dimensions (mm) | | |
|---|---|---|
| **Symbol** | **Dimension** | **Tolerance** |
| **L** | 26.5 | +0.3 |
| **H** | 15 | +0.1 |
| **T** | 6 | +0.2 |
| **S** | 22.5 | +/-0.4 |
| **LL** | 4 | +2 |
| **F** | 0.8 | +/-0.05 |

| Specifications | |
|---|---|
| **Capacitance:** | 0.33 uF |
| **Voltage:** | 560 VDC |
| **Tolerance:** | +/-10% |
| **Voltage AC:** | 275 VAC |
| **Rated Temperature:** | 110C |
| **Temperature Range:** | -40/+110C |
| **Dissipation Factor @ 1 kHz:** | 0.1% |
| **Insulation Resistance:** | 100 GOhm |
| **Maximum dVdT:** | 200 v/us |

| Packaging Specifications | |
|---|---|
| **Package Kind:** | Bulk |
| **Package Quantity:** | 805 |

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

© 2006-2016 IntelliData.net