



HESTORE.HU

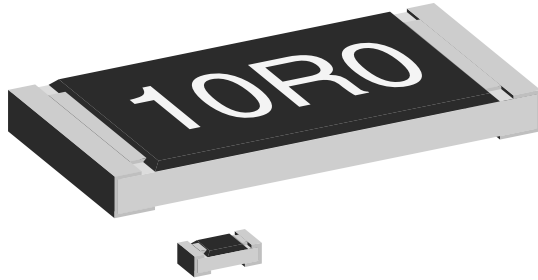
elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.



Lead (Pb)-free Thick Film, Rectangular Commodity Chip Resistors



FEATURES

- High volume product suitable for commercial applications
- Excellent stability ($\Delta R/R \leq 1\%$ for 1000 h at 70 °C)
- Lead (Pb)-free solder contacts on Ni barrier layer
- Metal glaze on high quality ceramic
- Protective overglaze
- Material categorization: For definitions of compliance please see www.vishay.com/doc?99912



RoHS
COMPLIANT

| STANDARD ELECTRICAL SPECIFICATIONS | | | | | | | | |
|---|----------------|------------------|-----------------------------------|---|-------------------------------|-------------|---------------------------|----------|
| MODEL | CASE SIZE INCH | CASE SIZE METRIC | POWER RATING $P_{70\text{ °C}}$ W | LIMITING ELEMENT VOLTAGE MAX. V \cong | TEMPERATURE COEFFICIENT ppm/K | TOLERANCE % | RESISTANCE RANGE Ω | E-SERIES |
| CRCW0201...BC | 0201 | RR 0603M | 0.05 | 30 | ± 200 | ± 0.5 | 10R to 10M | E96 |
| | | | | | - 200/+ 400 | | 1R0 to 9R76 | |
| | | | | | ± 100 | ± 1 | 47R to 1M | E24; E96 |
| | | | | | ± 200 | | 10R to 10M | |
| | | | | | - 200/+ 400 | ± 5 | 1R0 to 9R76 | E24 |
| | | | | | ± 200 | | 10R to 10M | |
| - 200/+ 400 | | 1R0 to 9R1 | | | | | | |
| Zero-Ohm-Resistor: $R_{\text{max.}} = 50\text{ m}\Omega$, $I_{\text{max.}}$ at 70 °C = 1.0 A | | | | | | | | |
| CRCW0402...BC | 0402 | RR 1005M | 0.063 | 50 | ± 100 | ± 1 | 1R0 to 10M | E24; E96 |
| | | | | | ± 200 | | 1R0 to 9R76 | |
| | | | | | ± 200 | ± 5 | 1R0 to 10M | E24 |
| | | | | | | | | |
| Zero-Ohm-Resistor: $R_{\text{max.}} = 20\text{ m}\Omega$, $I_{\text{max.}}$ at 70 °C = 1.5 A | | | | | | | | |
| CRCW0603...BC | 0603 | RR 1608M | 0.10 | 75 | ± 100 | ± 1 | 1R0 to 10M | E24; E96 |
| | | | | | ± 200 | | 1R0 to 9R76 | |
| | | | | | ± 200 | ± 5 | 1R0 to 10M | E24 |
| | | | | | | | | |
| Zero-Ohm-Resistor: $R_{\text{max.}} = 20\text{ m}\Omega$, $I_{\text{max.}}$ at 70 °C = 2.0 A | | | | | | | | |
| CRCW0805...BC | 0805 | RR 2012M | 0.125 | 150 | ± 100 | ± 1 | 1R0 to 10M | E24; E96 |
| | | | | | ± 200 | | 1R0 to 9R76 | |
| | | | | | ± 200 | ± 5 | 1R0 to 10M | E24 |
| | | | | | | | | |
| Zero-Ohm-Resistor: $R_{\text{max.}} = 20\text{ m}\Omega$, $I_{\text{max.}}$ at 70 °C = 2.5 A | | | | | | | | |
| CRCW1206...BC | 1206 | RR 3216M | 0.25 | 200 | ± 100 | ± 1 | 1R0 to 10M | E24; E96 |
| | | | | | ± 200 | | 1R0 to 9R76 | |
| | | | | | ± 200 | ± 5 | 1R0 to 10M | E24 |
| | | | | | | | | |
| Zero-Ohm-Resistor: $R_{\text{max.}} = 20\text{ m}\Omega$, $I_{\text{max.}}$ at 70 °C = 3.5 A | | | | | | | | |
| CRCW1210...BC | 1210 | RR 3225M | 0.50 | 200 | ± 100 | ± 1 | 1R0 to 10M | E24; E96 |
| | | | | | ± 200 | | 1R0 to 9R76 | |
| | | | | | ± 200 | ± 5 | 1R0 to 10M | E24 |
| | | | | | | | | |
| Zero-Ohm-Resistor: $R_{\text{max.}} = 20\text{ m}\Omega$, $I_{\text{max.}}$ at 70 °C = 4.0 A | | | | | | | | |
| CRCW2010...BC | 2010 | RR 5025M | 0.75 | 400 | ± 100 | ± 1 | 1R0 to 10M | E24; E96 |
| | | | | | ± 200 | | 1R0 to 9R76 | |
| | | | | | ± 200 | ± 5 | 1R0 to 10M | E24 |
| | | | | | | | | |
| Zero-Ohm-Resistor: $R_{\text{max.}} = 20\text{ m}\Omega$, $I_{\text{max.}}$ at 70 °C = 5.0 A | | | | | | | | |
| CRCW2512...BC | 2512 | RR 6332M | 1.0 | 500 | ± 100 | ± 1 | 1R0 to 10M | E24; E96 |
| | | | | | ± 200 | | 1R0 to 9R76 | |
| | | | | | ± 200 | ± 5 | 1R0 to 10M | E24 |
| | | | | | | | | |
| Zero-Ohm-Resistor: $R_{\text{max.}} = 20\text{ m}\Omega$, $I_{\text{max.}}$ at 70 °C = 7.0 A | | | | | | | | |

Notes

- These resistors do not feature a limited lifetime when operated within the permissible limits. However, resistance value drift increasing over operating time may result in exceeding a limit acceptable to the specific application, thereby establishing a functional lifetime.
- Power rating depends on the maximum temperature at the solder point, the component placement density and the substrate material




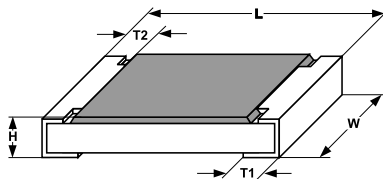
| TECHNICAL SPECIFICATIONS | | | | | | | | | |
|---|------|------------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| PARAMETER | UNIT | CRCW0201...BC | CRCW0402...BC | CRCW0603...BC | CRCW0805...BC | CRCW1206...BC | CRCW1210...BC | CRCW2010...BC | CRCW2512...BC |
| Rated Dissipation at 70 °C ⁽¹⁾ | W | 0.050 | 0.063 | 0.10 | 0.125 | 0.25 | 0.50 | 0.75 | 1.0 |
| Limiting Element Voltage <i>U</i> _{max} AC/DC | V | 30 | 50 | 75 | 150 | 200 | 200 | 400 | 500 |
| Insulation Voltage <i>U</i> _{ins} (1 min) | V | 50 | 75 | 100 | 200 | 300 | 300 | 300 | 300 |
| Insulation Resistance | Ω | > 10 ⁹ | | | | | | | |
| Operating Temperature Range | °C | - 55 to + 155 | | | | | | | |
| Failure Rate | °C | 0.3 x 10 ⁻⁹ | | | | | | | |
| Weight/ 1000 Pieces | g | 0.17 | 0.65 | 2 | 5.5 | 10 | 16 | 25.5 | 40.5 |

Note

⁽¹⁾ The power dissipation on the resistor generates a temperature rise against the local ambient, depending on the heat flow support of the printed-circuit board (thermal resistance). The rated dissipation applies only if the permitted film temperature of 155 °C is not exceeded.

| PART NUMBER AND PRODUCT DESCRIPTION | | | | | |
|--|---|--|---|--|-------------------------------------|
| PART NUMBER: CRCW0603562RFKTCBC | | | | | |
| C | R | C | W | 0 | 6 |
| 0 | 3 | 5 | 6 | 2 | R |
| F | K | T | C | B | C |
| MODEL | VALUE | TOLERANCE | TCR | PACKAGING | Special |
| CRCW0201 CRCW0402 CRCW0603 CRCW0805 CRCW1206 CRCW1210 CRCW2010 CRCW2512 | R = Decimal K = Thousand M = Million 0000 = Jumper | D = ± 0.5 % F = ± 1.0 % J = ± 5.0 % Z = Jumper | K = ± 100 ppm/K N = ± 200 ppm/K X = - 200 ppm/K/ + 400 ppm/K 0 = Jumper | TA, TB TC, TD TE, TF TH, TI | Up to 2 digits BC = Commodity |
| PRODUCT DESCRIPTION: CRCW0603-BC 100 562R 1 % RT6 e3 | | | | | |
| CRCW0603-BC | 100 | 562R | 1 % | RT6 | e3 |
| MODEL | TCR | RESISTANCE VALUE | TOLERANCE VALUE | PACKAGING | LEAD (Pb)-FREE |
| CRCW0201-BC CRCW0402-BC CRCW0603-BC CRCW0805-BC CRCW1206-BC CRCW1210-BC CRCW2010-BC CRCW2512-BC | ± 100 ppm/K ± 200 ppm/K - 200 ppm/K/ + 400 ppm/K | 10R = 10 Ω 562R = 562 Ω 10K = 10.0 kΩ 1M = 1 MΩ 0R0 = Jumper | ± 0.5 % ± 1 % ± 5 % | RT1, RT2 RT5, RT6 RT7, RF4 R02, R82 | e3 = Pure tin termination finish |

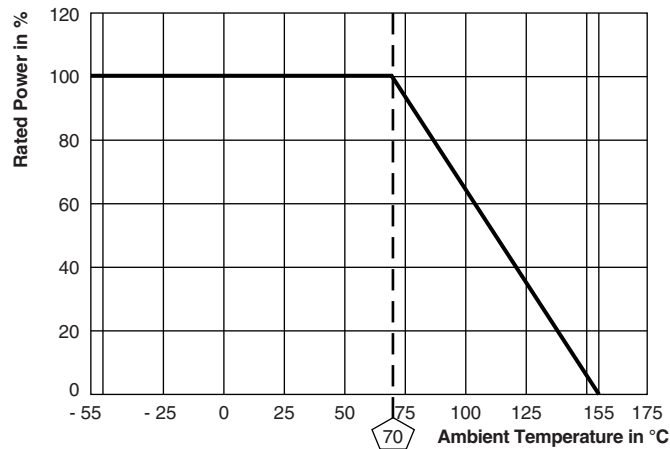
| PACKAGING | | | | | | | | |
|---------------|------------|------------|-------|-----------------|----------------|---------|---------------|---------|
| MODEL | REEL | | | | | | | |
| | TAPE WIDTH | DIAMETER | PITCH | PIECES/ REEL | PACKAGING CODE | | | |
| | | | | | PART NUMBER | | PRODUCT DESC. | |
| | | | | | PAPER | BLISTER | PAPER | BLISTER |
| CRCW0201...BC | 8 mm | 180 mm/7" | 2 mm | 10 000 | TD | - | RT7 | - |
| | | 254 mm/10" | | 20 000 | TI | - | RT2 | - |
| | | 330 mm/13" | | 50 000 | TE | - | RF4 | - |
| CRCW0402...BC | 8 mm | 180 mm/7" | 2 mm | 10 000 | TD | - | RT7 | - |
| | | 254 mm/10" | | 20 000 | TI | - | RT2 | - |
| | | 330 mm/13" | | 50 000 | TE | - | RF4 | - |
| CRCW0603...BC | 8 mm | 180 mm/7" | 4 mm | 5000 | TA | - | RT1 | - |
| | | 254 mm/10" | | 10 000 | TB | - | RT5 | - |
| | | 330 mm/13" | | 20 000 | TC | - | RT6 | - |
| CRCW0805...BC | 8 mm | 180 mm/7" | 4 mm | 5000 | TA | - | RT1 | - |
| | | 254 mm/10" | | 10 000 | TB | - | RT5 | - |
| | | 330 mm/13" | | 20 000 | TC | - | RT6 | - |
| CRCW1206...BC | 8 mm | 180 mm/7" | 4 mm | 5000 | TA | - | RT1 | - |
| | | 254 mm/10" | | 10 000 | TB | - | RT5 | - |
| | | 330 mm/13" | | 20 000 | TC | - | RT6 | - |
| CRCW1210...BC | 8 mm | 180 mm/7" | 4 mm | 5000 | TA | - | RT1 | - |
| | | 254 mm/10" | | 10 000 | TB | - | RT5 | - |
| | | 330 mm/13" | | 20 000 | TC | - | RT6 | - |
| CRCW2010...BC | 12 mm | 180 mm/7" | 4 mm | 4000 | - | TF | - | R02 |
| CRCW2512...BC | 12 mm | 180 mm/7" | 4 mm | 4000 | - | TH | - | R82 |

DIMENSIONS in millimeters


| SIZE | | DIMENSIONS | | | | | SOLDER PAD DIMENSIONS ⁽¹⁾ | | | | | |
|------|--------|--|-------------|-------------|---------------------------------------|---------------------------------------|--------------------------------------|------|-----|----------------|-----|-----|
| INCH | METRIC | L | W | H | T1 | T2 | REFLOW SOLDERING | | | WAVE SOLDERING | | |
| | | | | | | | a | b | l | a | b | l |
| 0201 | 0603 | 0.6 ± 0.05 | 0.3 ± 0.05 | 0.23 ± 0.05 | 0.15 ± 0.05 | 0.2 ^{+0.05} _{-0.10} | 0.3 | 0.43 | 0.2 | - | - | - |
| 0402 | 1005 | 1.0 ± 0.05 | 0.5 ± 0.05 | 0.35 ± 0.05 | 0.25 ± 0.05 | 0.2 ± 0.1 | 0.4 | 0.6 | 0.5 | - | - | - |
| 0603 | 1608 | 1.55 ^{+0.10} _{-0.05} | 0.85 ± 0.1 | 0.45 ± 0.05 | 0.3 ± 0.2 | 0.3 ± 0.2 | 0.5 | 0.9 | 1.0 | 0.9 | 0.9 | 1.0 |
| 0805 | 2012 | 2.0 ^{+0.20} _{-0.10} | 1.25 ± 0.15 | 0.45 ± 0.05 | 0.3 ^{+0.20} _{-0.10} | 0.3 ± 0.2 | 0.7 | 1.3 | 1.2 | 0.9 | 1.3 | 1.3 |
| 1206 | 3216 | 3.2 ^{+0.10} _{-0.20} | 1.6 ± 0.15 | 0.55 ± 0.05 | 0.45 ± 0.2 | 0.4 ± 0.2 | 0.9 | 1.7 | 2.0 | 1.1 | 1.7 | 2.3 |
| 1210 | 3225 | 3.2 ± 0.2 | 2.5 ± 0.2 | 0.55 ± 0.05 | 0.45 ± 0.2 | 0.4 ± 0.2 | 0.9 | 2.5 | 2.0 | 1.1 | 2.5 | 2.2 |
| 2010 | 5025 | 5.0 ± 0.15 | 2.5 ± 0.15 | 0.6 ± 0.1 | 0.6 ± 0.2 | 0.6 ± 0.2 | 1.0 | 2.5 | 3.9 | 1.2 | 2.5 | 3.9 |
| 2512 | 6332 | 6.3 ± 0.2 | 3.15 ± 0.15 | 0.6 ± 0.1 | 0.6 ± 0.2 | 0.6 ± 0.2 | 1.0 | 3.2 | 5.2 | 1.2 | 3.2 | 5.2 |

Note

- ⁽¹⁾ The rated dissipation applies only if the permitted film temperature is not exceeded. Furthermore, a high level of ambient temperature or of power dissipation may raise the temperature of the solder joint, hence special solder alloys or board materials may be required to maintain the reliability of the assembly. Specified power rating above 125 °C requires dedicated heat-sink pads, which depend on board materials. The given solder pad dimensions reflect the considerations for board design and assembly as outlined e.g. in standards IEC 61188-5-x, or in publication IPC-7351. They do not guarantee any supposed thermal properties, particularly as these are also strongly influenced by many other parameters. Still the given solder pad dimensions will be found adequate for most general applications.
- ⁽²⁾ No marking for 0201 and 0402 sizes.

DERATING


| TEST PROCEDURES AND REQUIREMENTS | | | | | | |
|----------------------------------|----------------------------------|------------------------------|---|--|--|---|
| EN 60115-1 CLAUSE | IEC 60068-2 TEST METHOD | TEST | PROCEDURE | REQUIREMENTS PERMISSIBLE CHANGE (ΔR) | | |
| | | | | STABILITY CLASS 1 OR BETTER | STABILITY CLASS 2 OR BETTER | SIZE 0201 |
| | | | Stability for product types: | | | |
| | | | CRCW...BC e3 | 1 Ω to 10 M Ω | 1 Ω to 10 M Ω | 1 Ω to 10 M Ω |
| 4.5 | - | Resistance | - | $\pm 1\%$ | $\pm 5\%$ | $\pm 0.5\%$, $\pm 1\%$, $\pm 5\%$ |
| 4.8.4.2 | - | Temperature coefficient | (20/- 55/20) °C and (20/125/20) °C | ± 100 ppm/K, ± 200 ppm/K | ± 200 ppm/K | ± 100 ppm/K, ± 200 ppm/K, - 200 ppm/K/ + 400 ppm/K |
| 4.13 | - | Short time overload | $U = 2.5 \times \sqrt{P_{70} \times R} \leq 2 \times U_{max.}$; duration: Acc. to the style | $\pm (0.25\% R + 0.05 \Omega)$ | $\pm (0.5\% R + 0.05 \Omega)$ | $\pm (1\% R + 0.05 \Omega)$ |
| 4.17.5 | 58 (Td) | Solderability | Pre-aging 4 h at 155 °C, dryheat | Solder bath method; Sn60Pb40 non activated flux; (235 \pm 5) °C (2 \pm 0.2) s | Good tinning ($\geq 95\%$ covered) no visible damage | |
| | | | | Solder bath method; Sn96.5Ag3Cu0.5 non activated flux; (245 \pm 5) °C (3 \pm 0.3) s | Good tinning ($\geq 95\%$ covered) no visible damage | |
| 4.18.2 | 58 (Td) | Resistance to soldering heat | Solder bath method (260 \pm 5) °C; (10 \pm 1) s | $\pm (0.25\% R + 0.05 \Omega)$ | $\pm (0.5\% R + 0.05 \Omega)$ | $\pm (1\% R + 0.05 \Omega)$ |
| 4.19 | 14 (Na) | Rapid change of temperature | 30 min. at - 55 °C; 30 min. at 125 °C; 5 cycles | $\pm (0.25\% R + 0.05 \Omega)$ | $\pm (0.5\% R + 0.05 \Omega)$ | $\pm (0.5\% R + 0.05 \Omega)$ |
| | | | 1000 cycles | $\pm (1\% R + 0.05 \Omega)$ | $\pm (1\% R + 0.05 \Omega)$ | $\pm (1\% R + 0.05 \Omega)$ |
| 4.24 | 78 (Cab) | Damp heat, steady state | (40 \pm 2) °C; 56 days; (93 \pm 3) % RH | $\pm (1\% R + 0.05 \Omega)$ | $\pm (2\% R + 0.1 \Omega)$ | $\pm (2\% R + 0.1 \Omega)$ |



| TEST PROCEDURES AND REQUIREMENTS | | | | | | |
|----------------------------------|----------------------------------|------------------------|---|--|-----------------------------------|---------------------------------|
| EN 60115-1 CLAUSE | IEC 60068-2 TEST METHOD | TEST | PROCEDURE | REQUIREMENTS PERMISSIBLE CHANGE (ΔR) | | |
| | | | | STABILITY CLASS 1 OR BETTER | STABILITY CLASS 2 OR BETTER | SIZE 0201 |
| | | | Stability for product types: | | | |
| | | | CRCW...BC e3 | 1 Ω to 10 M Ω | 1 Ω to 10 M Ω | 1 Ω to 10 M Ω |
| 4.23 | - | Climatic sequence: | - | | | |
| 4.23.2 | 2 (Ba) | Dry heat | 125 °C; 16 h | | | |
| 4.23.3 | 30 (Db) | Damp heat, cyclic | 55 °C; \geq 90 % RH; 24 h; 1 cycle | | | |
| 4.23.4 | 1 (Aa) | Cold | - 55 °C; 2 h | \pm (1 % R + 0.05 Ω) | \pm (2 % R + 0.1 Ω) | \pm (2 % R + 0.1 Ω) |
| 4.23.5 | 13 (M) | Low air pressure | 1 kPa; (25 \pm 10) °C; 1 h | | | |
| 4.23.6 | 30 (Db) | Damp heat, cyclic | 55 °C; \geq 90 % RH; 24 h; 5 cycles | | | |
| 4.23.7 | - | DC load | $U = \sqrt{P_{70} \times R} \leq U_{max.}$ | | | |
| 4.25.1 | - | Endurance at 70 °C | $U = \sqrt{P_{70} \times R} \leq U_{max.};$ 1.5 h on; 0.5 h off; | | | |
| | | | 70 °C; 1000 h | \pm (1 % R + 0.05 Ω) | \pm (2 % R + 0.1 Ω) | \pm (2 % R + 0.1 Ω) |
| | | | 70 °C; 8000 h | \pm (2 % R + 0.1 Ω) | \pm (4 % R + 0.1 Ω) | \pm (4 % R + 0.1 Ω) |
| 4.25.3 | - | Endurance at 125 °C | 125 °C, 1000 h | \pm (1 % R + 0.05 Ω) | \pm (2 % R + 0.1 Ω) | \pm (2 % R + 0.1 Ω) |

| APPLICABLE SPECIFICATIONS |
|---|
| <ul style="list-style-type: none"> • EN60115-1 Generic specification • EN140400 Sectional specification • EN140401-802 Detail specification • IEC 60068-2-X Variety of environmental test procedures • IEC 60286-3 Packaging of SMD components |