



**HESTORE.HU**

elektronikai alkatrész áruház

**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).


## Current Sensing Chip Resistors

### Performance Specification

Short Time Overload	1%: $\pm(1.0\% + 0.005\Omega)\text{Max}$ 5%: $\pm(2.0\% + 0.005\Omega)\text{Max}$
Terminal Bending	$\pm(1.0\% + 0.005\Omega)\text{Max}$
Solderability	Min. 95% coverage.
Temperature Cycling	$\pm(1.0\% + 0.005\Omega)\text{Max}$
Soldering Heat	$\pm(1.0\% + 0.005\Omega)\text{Max}$
Load Life in Humidity	5% : $\pm(3.0\% + 0.005\Omega)\text{Max}$ 1% : $\pm(1.0\% + 0.005\Omega)\text{Max}$
Load Life	5% : $\pm(3.0\% + 0.005\Omega)\text{Max}$ 1% : $\pm(1.0\% + 0.005\Omega)\text{Max}$
Insulation Resistance	Min. 1,000 Mega Ohm
Dielectric Withstanding Voltage	No evidence of flashover, mechanical damage, arcing or insulation breakdown.

CS07 size in 0.75W 0.1 ~ 1Ω 100PPM/°C could be provided specially ( \* CS07 0.75W 0.1 ~ 1Ω 100PPM/°C )

### Ordering Procedure: Ex.: CS03, 1/10W, +/-5%, 22mΩ T/R-5000

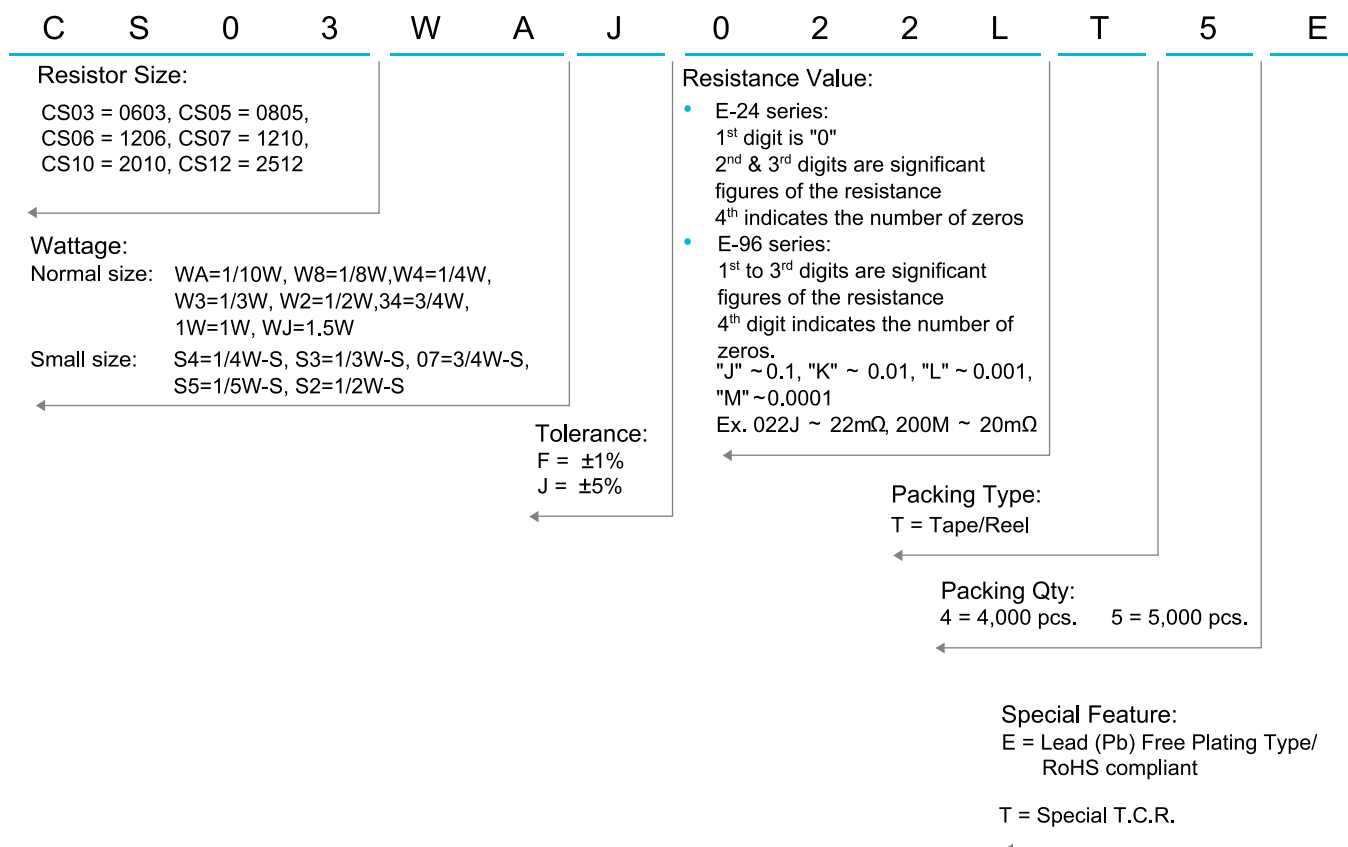


# Current Sensing Chip Resistors

## Features

- Ultra low Value
- Low Temperature Coefficient
- Suitable for wave and reflow soldering
- Application: Power supply
- High Power rating available upon request

## Dimension

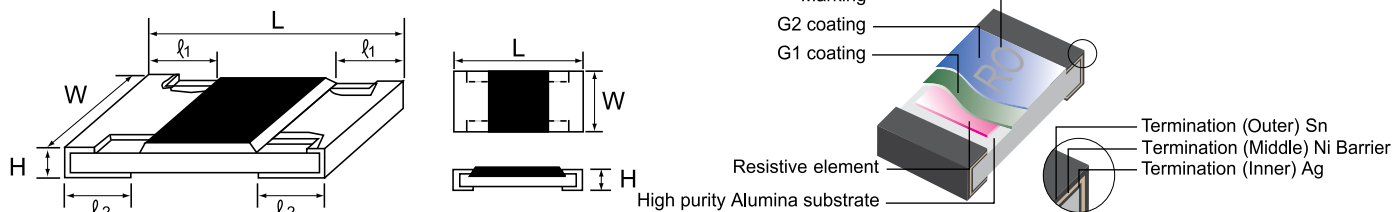

Type	Power Rating at 70°C	Dielectric Withstanding Voltage	Tolerance %	Resistance Range (mΩ)	T.C.R. (PPM/°C)	Dimension (mm)				
						L	W	H	l <sub>1</sub>	l <sub>2</sub>
CS03 (0603)	1/10W, 1/5W-S	300V	±1% ±5%	20mΩ ~ 29.9mΩ	±800	1.60±0.10	0.80 <sup>+0.15</sup> -0.10	0.45±0.10	0.30±0.20	0.30±0.20
				30mΩ ~ 32.9mΩ	±600					
				33mΩ ~ 50mΩ	±400					
				50.1mΩ ~ 0.1Ω	±300					
				0.11Ω ~ 1Ω	±200					
CS05 (0805)	1/8W, 1/4W-S	500V	±1% ±5%	10mΩ ~ 15mΩ	±800	2.00±0.15	1.25 <sup>+0.15</sup> -0.10	0.55±0.10	0.40±0.20	0.40±0.20
				15.1mΩ ~ 25mΩ	±600					
				25.1mΩ ~ 50mΩ	±400					
				50.1mΩ ~ 0.2Ω	±200					
				0.21Ω ~ 1Ω	±100					
CS06 (1206)	1/4W, 1/3W-S	500V	±1% ±5%	10mΩ ~ 14.9mΩ	±700	3.10±0.15	1.55 <sup>+0.15</sup> -0.10	0.55±0.10	0.45±0.20	0.45±0.20
				15mΩ ~ 30mΩ	±400					
				30.1mΩ ~ 50mΩ	±300					
				50.1mΩ ~ 0.1Ω	±200					
				0.11Ω ~ 1Ω	±150					
CS07 (1210)	1/3W, 1/2W-S	500V	±1% ±5%	10mΩ ~ 14.9mΩ	±500	3.10±0.10	2.60±0.15	0.55±0.10	0.50±0.25	0.50±0.20
				15mΩ ~ 19.9mΩ	±400					
				20mΩ ~ 50mΩ	±300					
				50.1mΩ ~ 1Ω	±100					
CS10 (2010)	1/2W, 3/4W-S	500V	±1% ±5%	10mΩ ~ 14.9mΩ	±600	5.00±0.10	2.50±0.15	0.55±0.10	0.60±0.25	0.50±0.20
				15mΩ ~ 19.9mΩ	±500					
				20mΩ ~ 30mΩ	±300					
				30.1mΩ ~ 50mΩ	±200					
				50.1mΩ ~ 0.1Ω	±150					
CS12 (2512)	1W	500V	±1% ±5%	10mΩ ~ 14.9mΩ	±600	6.35±0.10	3.20±0.15	0.55±0.10	0.60±0.25	0.80±0.30
				15mΩ ~ 19.9mΩ	±400					
				20mΩ ~ 30mΩ	±300					
				30.1mΩ ~ 50mΩ	±200					
				50.1mΩ ~ 0.1Ω	±150					

Note:

- 1.) Standard Operating Temp (°C) : -55 -+155
- 2.) Standard : E-96 series : 1%  
E-24 series : 5%
- 3.) High power available on case to case basis.
- 4.) CS07 size in 0.75W 100mΩ ~ 1Ω 100PPM/°C could be provided specially.
- 5.) CS12 size in 1W 50.1mΩ ~ 100mΩ 100PPM/°C could be provided specially.

