EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

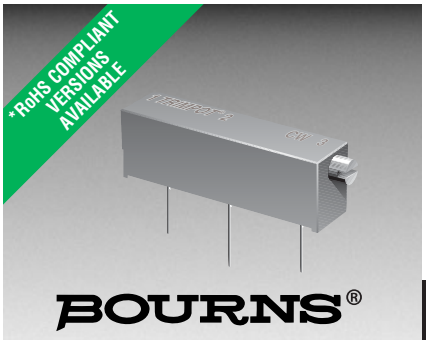

Features

- 3/4 " Rectangular / Multiturn Cermet / Industrial / Sealed
- Low PC board profile - only 1/4 " high
- Panel mount option available
- Transparent housing available, can be set visually without hook-up and instrumentation ("P" style only)
- RoHS compliant* version available

3006 - Trimpot® Trimming Potentiometer

Electrical Characteristics

Standard Resistance Range
.....10 to 5 megohms
(see standard resistance table)
Resistance Tolerance .....±10 % std.
(tighter tolerance available)
Absolute Minimum Resistance
.....1.0 % or 2 ohms max.
(whichever is greater)
Contact Resistance Variation
.....1.0 % or 1 ohm max.
(whichever is greater)
Adjustability
Voltage.....±0.01 %
Resistance.....±0.05 %
Resolution.....Infinite
Insulation Resistance .....500 vdc.
1,000 megohms min.
Dielectric Strength
Sea Level.....1,000 vac
80,000 Feet.....250 vac
Adjustment Angle .....15 turns nom.

Environmental Characteristics

Power Rating (400 volts max.)
70 °C .....0.75 watt
125 °C .....0 watt
Temperature Range ....-55 °C to +125 °C
Temperature Coefficient ....±100 ppm/°C
Seal Test.....85 °C Fluorinert†
Humidity.....MIL-STD-202 Method 103
96 hours
(3 % ΔTR, 20 Megohms IR)
Vibration.....20 G (2 % ΔTR; 2 % ΔVR)
Shock.....50 G (2 % ΔTR; 2 % ΔVR)
Load Life ...1,000 hours 0.75 watt 70 °C
(4 % ΔTR)
Rotational Life.....200 cycles
(3 % ΔTR; 1 % or 1 ohm,
whichever is greater, CRV)

Physical Characteristics

Torque .....5.0 oz-in. max.
Mechanical Stops .....Wiper idles
Terminals.....Solderable pins
Weight .....0.04 oz.
Marking .....Manufacturer's
trademark, resistance code,
terminal numbers, date code,
manufacturer's model number
and style
Wiper .....50 % (Actual TR) ±10 %
Flammability.....U.L. 94V-0
Standard Packaging.....25 pcs. per tube
Adjustment Tool.....H-90

Common Dimensions

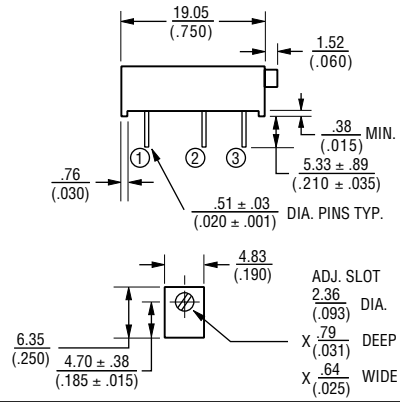

3006P



3006W



3006Y



TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED

DIMENSIONS ARE: MM / (INCHES)

How To Order

3006 P - 1 - 103 Z LF

Model
Style
Standard or Modified Product Indicator
-1 = Standard Product
-7 = Transparent Housing
Resistance Code
Optional Suffix Letter
Z = Panel Mount (Factory Installed)
Terminations
LF = 100 % Tin-plated (RoHS compliant)
Blank = 90 % Tin / 10 % Lead-plated (Standard)

Consult factory for other available options.

Standard Resistance Table

Resistance (Ohms)	Resistance Code
10	100
20	200
50	500
100	101
200	201
500	**501**
1,000	**102**
2,000	**202**
5,000	**502**
10,000	**103**
20,000	**203**
25,000	**253**
50,000	**503**
100,000	**104**
200,000	**204**
250,000	254
500,000	504
1,000,000	105
2,000,000	205

Popular distribution values listed in boldface.
Special resistances available.



REV. 10/04

*RoHS Directive 2002/95/EC Jan 27 2003 including Annex.
†"Fluorinert" is a registered trademark of 3M Co.
Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.