**EN:** This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

- **Notice: Signal pairing is required before use.**
- Achtung: Vor der Verwendung ist eine Signalpaarung erforderlich.
- Attention : Un appairage de signal est nécessaire avant utilisation.
- **Внимание: перед использованием необходимо выполнить сопряжение сигналов.**
- **Attenzione: È necessario eseguire l'abbinamento del segnale prima dell'uso.**
- Atenção: É necessário fazer o pareamento de sinal antes do uso.
- Atención: Se requiere emparejamiento de señales antes del uso.
- 주의: 사용 전에 신호 페어링을 해야 합니다.

**Video Tutorial**

**Scan the QR code to enter the tutorial video of the settings**

https://youtu.be/sX4j6LiwdF0

# CONTACT US

**WhatsApp: +86 135 0227 8583 / +86 181 3880 5271**

**Email : dieseelectronic@163.com**

# PRODUCT DETAIL & WIRING DIAGRAM

AC: 85V-250V

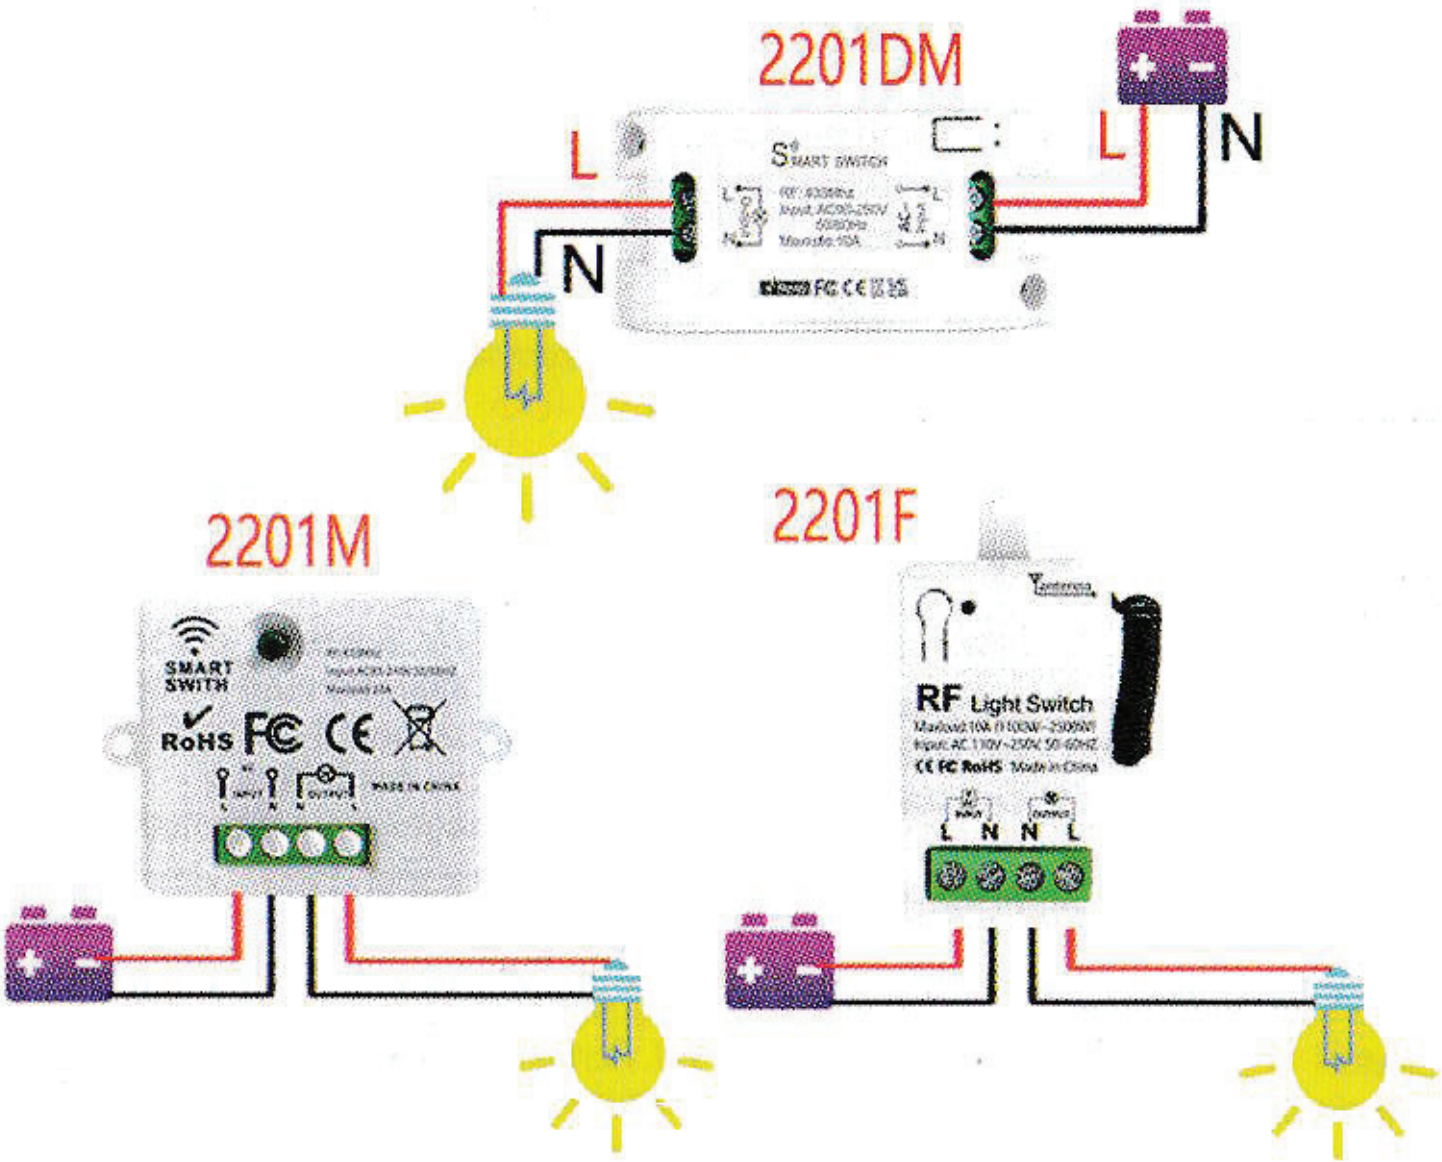


Slightly stretch the antenna before use for better signal reception

# PRODUCT INFORMATION

| Technical Data | |
|---|---|
| Input voltage | AC 85V~250V |
| Output vlotage | AC 85V~250V |
| Quiescent Current | <5MA |
| Max current | 10A |
| RF frequency | 433.92MHz |
| Working temperature | -30~+80 ℃ |
| Receiving Sensitivity | >-97dbm |
| Amount of storage remote controls | 20 pieces |
| Support encoding | 1527 Leaning code |
| RF Operating mode | ASK superheterodyne wireless reception |
| Receiving range | Open space is more than 50 meters |
| Remote operating mode | Momentary Mode / Toggle Mode /Latched Mode |

# 【ENGLISH】OPERATING MODE

## ● Toggle Mode:

1. Press button "A", relay will turn on;
2. Press button "A" again, this relay will turn off.

Match signal :

1. Press the learning button(on the receiver) 2 times. Wait for 3 seconds;
2. Press one button on the remote control. Succeed.

## ● Latched mode:

1. Press button "A", relay will turn on;
2. Press button "B", this relay will turn off.

Match signal :

1. Press the learning button(on the receiver) 3 times. Wait for 3 seconds;
2. Press button "A" on the remote control. Wait for 3 seconds.
3. Press button "B" on the remote control. Succeed.

## ● Momentary Mode:

1. Press and hold one button, relay will turn on;
2. Release the button, this relay will turn off.

Match signal :

1. Press the learning button(on the receiver) 4 time. Wait for 3 seconds;
2. Press one button on the remote control. Succeed.

## ● Delete signal match:

Press the learning button (on the receiver) 8 times. succeed.

## ● Incoming call switching funtion mode.

Performance:
Status 1: After repowering, the light remains off. (The factory default is this state)
Status 2: After repowering, the light will turn on automatically.
How to switch status1/2 :
Press the learning button(on the receiver) 6 times

## ● Notice:

1. clear signal match before you want to change the operating mode of one remote control.
2. After clear signal matching, all the remote controls cannot work anymore.
3. Replace the battery in time when the remote control voltage is low. To get the stronger signal transmission.
4. Slightly stretch the antenna on the receiver for better signal reception.