




**HESTORE.HU**


elektronikai alkatrész áruház

**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

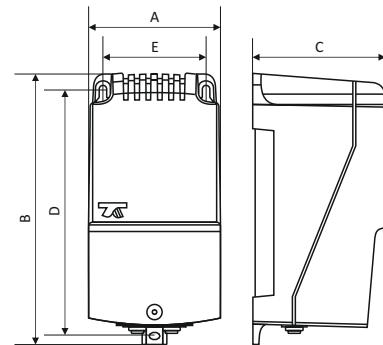

ARE 3,0N, ARE 5,0N

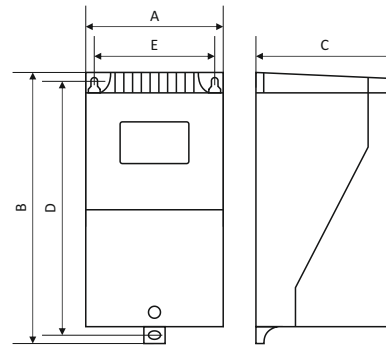

ARE 10,0N

#### Features:

- kick-start (full supply voltage for the first 10 seconds),
- smooth control,
- control by potentiometer,
- 0-10VDC signal control,
- for single-phase AC motors,
- for the industrial environment,
- possibility of setting the minimum output voltage,
- IP54 protection grade.

#### Description:

Microprocessor, thyristor fan speed controllers for single-phase AC motors, using the phase method for control. They provide smooth control of fans using a potentiometer or a 0-10VDC signal. The built-in KickStart function applies full power supply voltage for the first 10 seconds, ensuring correct and safe start-up. Designed for use in industrial environments, with the ability to set the minimum output voltage.

#### Applications:

- agriculture - animal breeding,
- gastronomy,
- underground garages.

Art. Nr	Name	Current	Adjustment range	Dimensions [mm]					Weight [kg]
		[A]	[V]	A	B	C	D	E	
17000-1383	ARE 3,0N	3	90 - 230	73	141	72,5	128	58	0,35
17000-1384	ARE 5,0N	5	90 - 230	73	141	72,5	128	58	0,35
17000-1385	ARE 10,0N	10	90 - 230	90	173	89	157	71	0,85

### 1. Application:

ARE regulators are designed to control speed of single-phase ventilator induction motors. Output voltage is controlled by a potentiometer or a 0-10V DC signal from an external device. The regulators feature a "Kickstart" function that enables the safe startup of the motor. Speed regulation is achieved through phase-shift control.

### 2. Technical data:


#### 2.1. Electric parameters:

Type	$U_{PRI}$ [V]	Output voltage range $V_{OUT}$ [V <sub>RMS</sub> ]	Rated output current $I_{OUT}$ [A]
ARE 3,0N	230	90-230	3,0
ARE 5,0N	230	90-230	5,0
ARE 10,0N	230	90-230	10,0


#### 2.2. Additional technical data:

Degree of protection	IP54
Ambient temperature	+35°C
Protection	Short circuit protection.
Manufactured in compliance with	EN 55032, EN 55035, EN IEC 61000-3-2, EN 61000-3-3, EN IEC 62368-1
Insulation class	II
Regulation	Potentiometer, 0-10VDC signal

### 3. Dimensions:

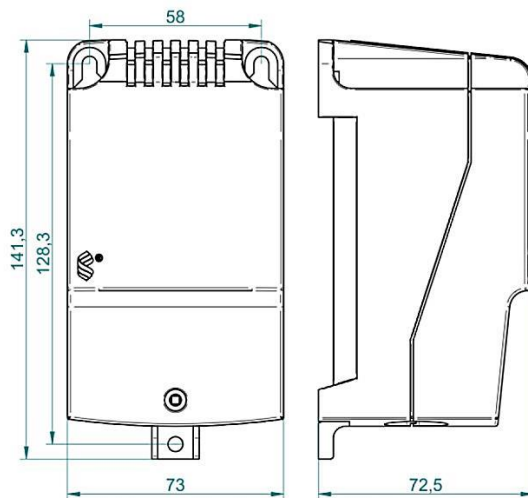

Drawing 1 Dimensions of the ARE 3.0-5.0N regulator

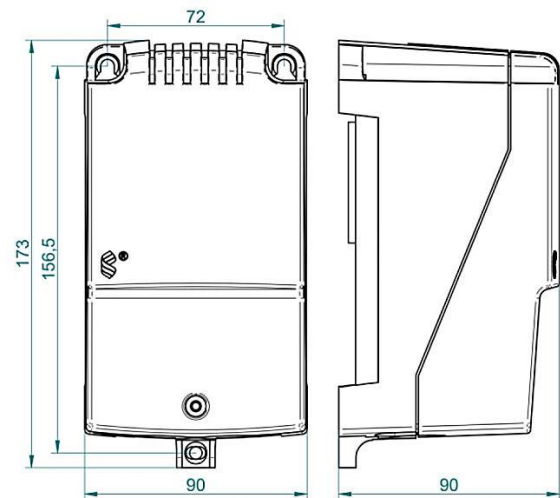

Drawing 2 Dimensions of the ARE 10.0N regulator

### 4. Installation:

- Pay attention to the controller's ambient temperature. The casing may become hot during operation. When installing multiple units next to each other, it is recommended to maintain a minimum distance of 20 cm.  
**Install in a vertical position!**
- Mount the regulator to a flat surface (wall, etc.) using screws. Open the regulator casing by unscrewing the cover screw.
- Insert the wires through the grommets (max cable diameter – 1,5mm<sup>2</sup>).
- Make the connections according to the appropriate diagram.
- Place short-circuit protection devices in the power supply circuit.
- When connecting the setpoint device, ensure the correct connection of the 0-10VDC signal. Use an additional cable gland for the 0-10VDC signal cable.


## 5. Control via potentiometer or 0-10VDC signal.:

Switching SW1 to the ON position changes the control signal from the potentiometer to the 0-10VDC signal.


## 6. Changing the minimum output voltage value.:

To change the minimum output voltage value, turn the potentiometer labeled RPOT (RSK) located on the regulator's circuit board.

## 7. Control characteristic:

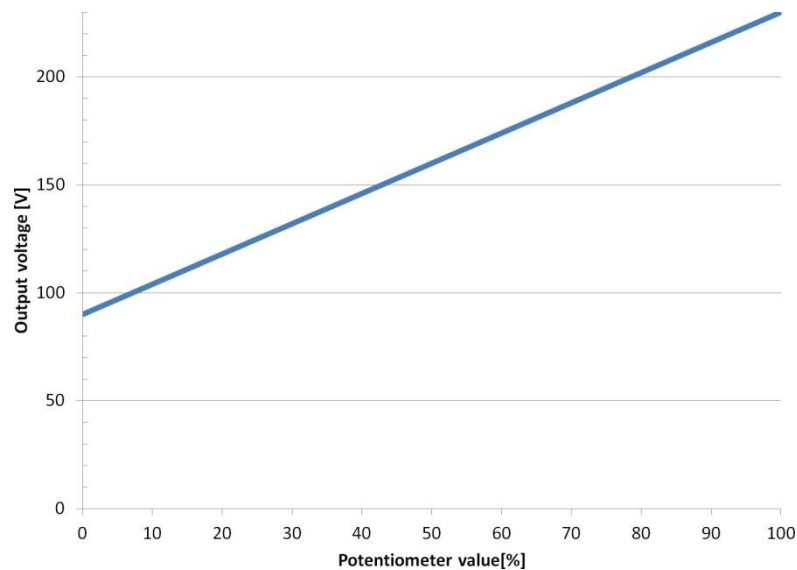

## 8. Connection diagram:

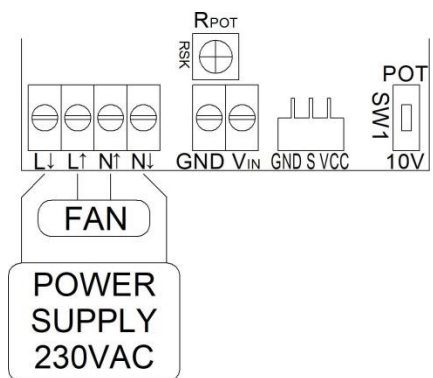

### Connectors:

**L↓ – N↓** - regulator output,  
**N↑ – L↑** - regulator power supply - 230VAC 50/60Hz,  
**GND – VIN** - analog input 0-10VDC,  
**GND – S – VCC** - analog input for the potentiometer,  
**RPOT** - potentiometer for adjusting the minimum output voltage value of the regulator,  
**SW1** - switch SW1: 0-10VDC/potentiometer.

## 9. Safety:

- 9.1. Installation of the regulator should be done by qualified electrician.
- 9.2. Installation of the regulator while live threatens with electric shock.
- 9.3. The maximal output current cannot exceed the rated current of the regulator.

## 10. Maintenance:

The original box used by the producer provide safety transport and storage. For storage, use the original boxing only. Keep in temperatures from -5°C do +50°C.