




EN: This Datasheet/Document is presented by the manufacturer.


Please visit our website for pricing and availability at www.hestore.hu.

CR17450

Lithium Manganese
Dioxide(Li-MnO₂)Batteries

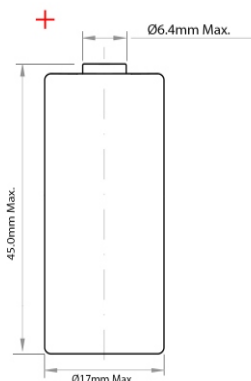


DISCHARGE CHARACTERISTICS

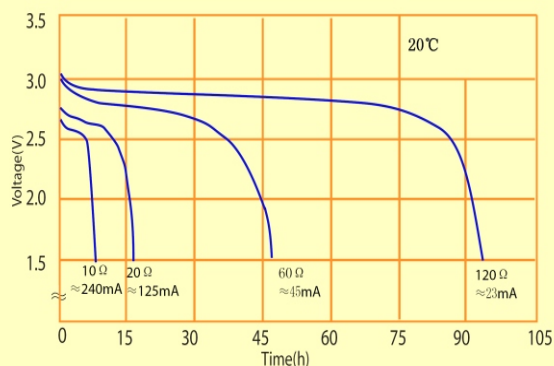

Nominal capacity (10mA, 2.0V off)	2300mAh
Nominal voltage	3.0V
Max. constant current	1500mA
Max. pulse current	3000mA
Operating temperature	-40~+85°C
Weight	26.0g


TEMPERATURE CHARACTERISTICS

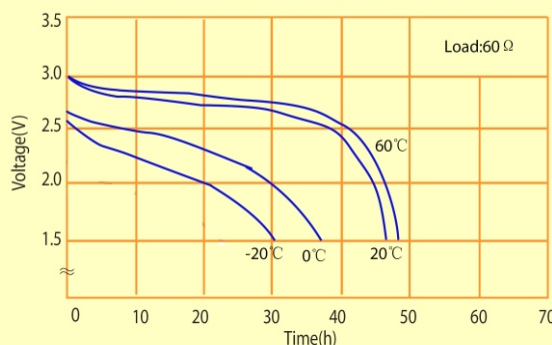

WARNING

- Do not short-circuit between "+" and "-" terminals.
- Do not charge, damage the battery or throw it into fire.
- Do not solder directly on the battery. Please use wire or nickel sheet by spot welding.
- Take out the battery when discharged to cut-off voltage, and dispose of according to the national and local laws.

LOAD-CAPACITY CHARACTERISTICS

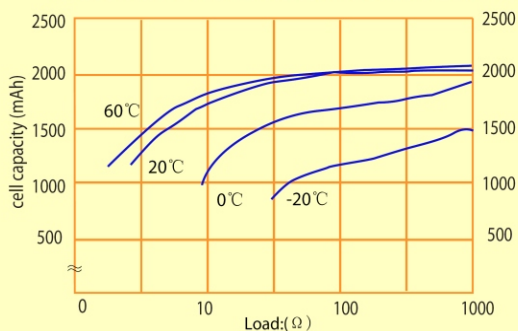

EVE ENERGY CO., LTD.

Address.: EVE Industrial Park, XiKeng Industrial zone, Huihuan Town, Huizhou, Guangdong, China

Operator: (86-752)260 6966

Direct: (86-752)260 5822

Fax: (86-752)260 6033

P.C. 516006

<http://www.evebattery.com>

Email: sales@evebattery.com

Latest version can be downloaded from the EVE web site

CR17450 2010.05