



**EN:** This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

**TRUST  
THE  
ORIGINAL**

# speakON<sup>®</sup> Connectors



**NEUTRIK<sup>®</sup>**

| Content                                                | Page |
|--------------------------------------------------------|------|
| speakON SPX Series, 2 & 4 Pole Cable Connector .....   | 4    |
| speakON FC Series, 4 and 8 Pole Cable Connector .....  | 6    |
| speakON Adapter, 4 & 8 Pole .....                      | 7    |
| speakON Chassis Connector, 2,4 & 8 Pole .....          | 8    |
| speakON Combo .....                                    | 9    |
| speakON STXX Series, 4 & 8 Pole Cable Connector .....  | 10   |
| speakON STXX Series, 4 & 8 Pole Chassis Connector..... | 11   |
| Technical Data .....                                   | 12   |
| Ordering Information:                                  |      |
| Cable Connectors .....                                 | 13   |
| Accessories for Cable Connector .....                  | 13   |
| Chassis Connectors .....                               | 14   |
| Accessories for Chassis Connectors .....               | 15   |
| Wiring .....                                           | 16   |
| <b>General information:</b>                            |      |
| Definition, Abbreviation & Useful Information .....    | 17   |
| Neutrik Part Number Guide .....                        | 18   |
| Neutrik Product Line .....                             | 19   |

## speakON® Connectors




## Introduction

The Neutrik speakON® Series, known in the professional audio industry as "The loudspeaker connector" has become the state of the art in speaker and amplifier connectivity. Introduced in 1987 speakON was invented by Neutrik as a result of customer demand for a reliable speaker connection. The pro audio market quickly realized the advantages of this completely new connection system.

The design is optimized for loudspeaker applications with an outstanding cost-performance ratio. As market leader for speaker connections we are proud to offer an all-encompassing product line for the specific needs of today's market. Recent designs such as the STXX series and the speakON Combo offer solutions for nearly every speaker application.

## Integrated Design

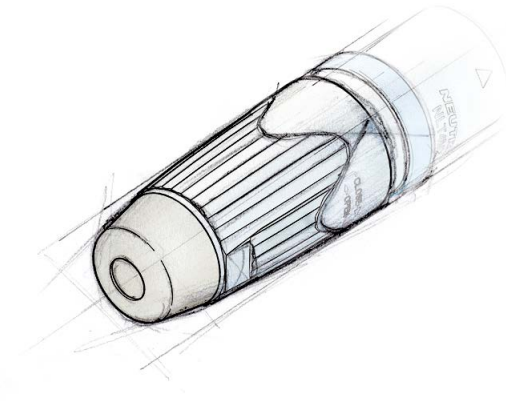

One of Neutrik's goals is to create products that are easily distinguished from other manufacturers. We have successfully achieved this in our engineering efforts as well as the patent and trademark protection granted for our unique products. To further establish a clear difference between Neutrik and our competitor's products we give our customer the means to easily identify original Neutrik products. Therefore all of our new products such as the SPX and the STX series are designed according to the protected integrated design. (EU-Pat.: DM/057 379, US-Pat. Pending, CHINA-Pat.: 02305192.2 / 193.0/194.9 / 195.7)

## Features & Benefits



Today's speakON series is a result of a continuous product improvement process. The principal idea has been kept and optimized with material and design modifications over the years.

A traditional speakON stands for:

- Reliable and robust, easy and fast to assemble
- 2, 4 and 8 pole cable and chassis connectors in various versions
- Optimal "Quick Lock" system for speaker applications
- Neutrik proven and unique chuck type cable strain relief
- Outstanding cost-performance ratio
- De facto standard
- Meets all worldwide safety requirements (IEC, UL, ...)

Beyond that, the latest designs as the SPXX and STXX series offer:

- Up to 50 A current rating
- Only 3 parts with 1 piece strain relief design for even easier assembly
- Convertible right-angle version
- Weatherproof and extremely robust



Quick lock



Chuck type strain relief



Right angle conversion



## spea k O N® SPX Series 2 & 4 Pole Cable Connector



NL2FX




NL4FX




NL4FRX

- Current rating 40 A rms continuous
- Up to 50 A audio signal, duty cycle 50%
- Only 3 parts, easy to assemble
- High impact materials – long-lasting and reliable
- Easy and extremely precise locking system "Quick Lock"
- Improved grip on latch
- 1 piece strain relief, chuck for 7 to 14.5 mm cable O.D.
- Color coding possible
- Improved screw-type termination for highest pull-out force
- Integrated design guarantees "Made by NEUTRIK®"

NL4FX




NL4FRX



## Design Criteria


This second generation of speakON connectors features higher current rating for the operation of high power speakers and amplifiers carrying more than 1'000 Watts. Only 3 parts make it fast and easy to assemble with a more reliable

performance. Our unique design makes it possible to change easily and quickly from a straight connector to the right-angle version, even without disconnecting the cable.

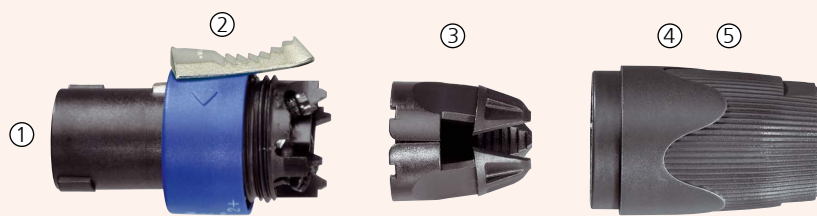

- ① Easy and extremely precise locking system "Quick Lock"
- ② Improved grip on latch
- ③ 1 piece strain relief, chuck for 7 to 14.5 mm cable O.D., with accessory NLRR 5-8 mm
- ④ Color coding possible
- ⑤ Integrated design guaranties "Made by NEUTRIK®"


## Improved SPX-Series screw contacts! (Wire position after assembly)

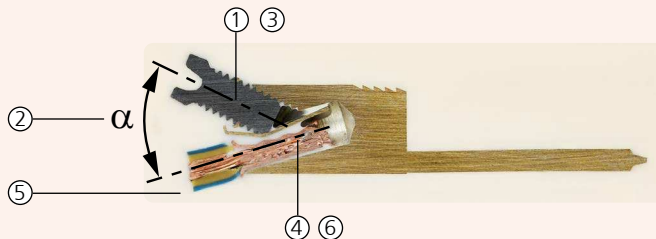

- ① Progressive clamping as wire is pushed forward
- ② Acts as screw locking device due to side forces
- ③ Large combi drive - M4 screw
- ④ Wire size 1.5 - 4 mm² (AWG 12) for 6 mm² (AWG 10) remove screw & solder
- ⑤ Pull out force > 200 N @ 80 cNm
- ⑥ Gas tight connection

## Assembly

Prepare cable as shown.

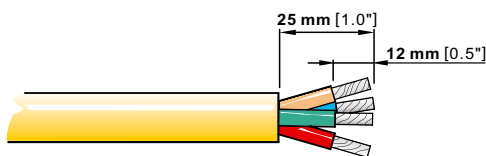

### HINT:

For easy wiring especially of thick cables, first screw on the inner contacts 1+ and 2+ and afterwards the outer contacts 1- and 2- !

Use screwdriver Pozidriv #1 only.





Glass reinforced housing



Quick lock



## speaKON® FC Cable Connector Series




NL4FC




NL8FC

- Up to 30 A rms current rating
- Glass reinforced materials for housing and inserts
- Unique Neutrik chuck type strain relief
- Precise keyway for secure mating
- Accurate twist lock latching system
- 4 pole in new design with more ergonomic latch


### Keying:

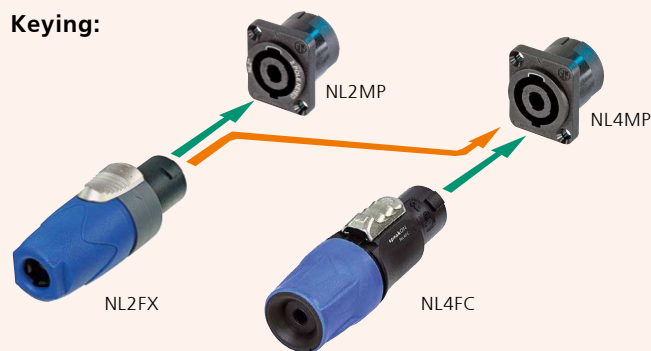

NL4FC



NL8FC

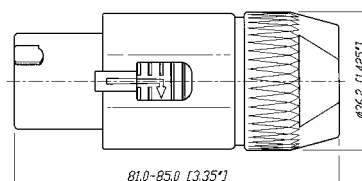



1/4" Jack adapter



Extension coupler



Secure Lock

## speakON® Adapter



NA4LJX



NL4MMX



NL8MMXX

### NL4MMX:

Features permanent secure connection on a speakON cable connector using 2<sup>nd</sup> lock.



**Secure Lock!**


### NL4MMX + NL4FX:

(locked on the cable)


Changes gender to male when permanently locked on the cable.




### NA4LJX



### NL4MM

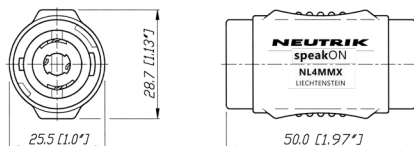

### NL8MM

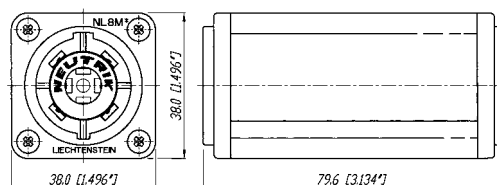







Reinforced locking area



Nickel housing



3/16" flat tabs



Vertical PCB mount



## speakON® Chassis Connector



NL2MDXX-V



NL4MDXX-H-3



NL4MPXX




NL4MPRXX




NL8MPRXX

- Standard version up to 25 A rms, ultra high current version up to 50 A audio current
- Glass reinforced materials
- Precise keyway for secure mating
- Accurate twist lock latching system
- Metal front plate (8 pole) or metal insert in locking area (2 & 4 pole)
- Various mounting and wiring possibilities
- "Air tight design", optimized for speaker applications
- D or G panel cutouts to be easily mounted on audio industry standard panels


### NL4MDXX-H-3

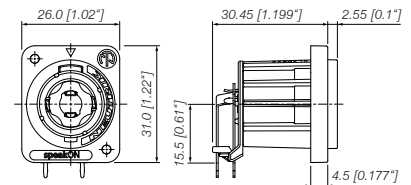


### NL4MPRXX

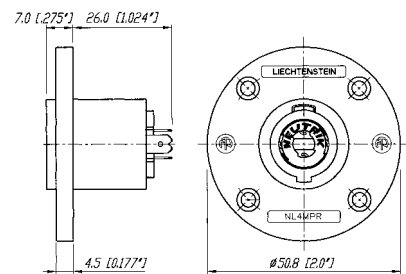


### NL4MPXX

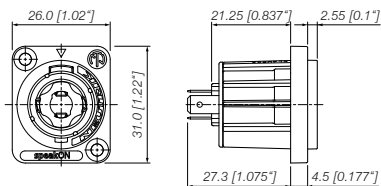

### NL4MDXX-V-2

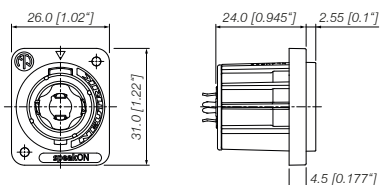

### NL8MPRXX

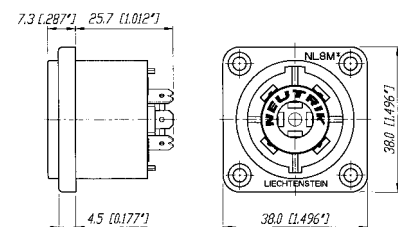



Locking key



PCB solder pins



## speakON® Combo





NLJ2MDXX-V


- D-size flange
- Compatible PCB layout and panel mount to NL4MD-V-1 (NL4MD-H)
- Cost saving – combines two connectors in one housing
- Mates with all 2, 4 pole speakON® and 1/4" Phone Plugs
- PA-wiring: 1+ is connected to TIP, 1- to the SLEEVE
- PCB layout of NLJ2MD-V is compatible with NL4MD-V and PCB layout of NLJ2MD-H is compatible with NL4MD-H




Combines a speakON® and 1/4" Phone Jack – one for two

NLJ2MDXX-V





Reinforced locking



Latch lock



XL-solder contacts



Protected latch

## speaKON® STXX Series Cable Connectors



NLT4FXX-BAG



NLT4MXX




NLT8FX




NLT8MX-BAG

- Up to 30 A current rating
- Robust and durable all metal housing
- Sealing ring provides weatherproof IP 54 rating in mated condition on 4 pole version
- Reinforced metal quick lock system for ease and precise locking
- Extra large solder contacts for up to 6 mm<sup>2</sup> (AWG 10) wires
- Compatible with all available speaKON products


- ① Easy and extremely precise locking system "quick look", reinforced with metal
- ② Improved grip on latch
- ③ 1 piece strain relief, chuck for cables from 9 to 16 mm O.D.
- ④ Extreme rugged "Touring Approved"
- ⑤ Rubber sealing boot
- ⑥ Integrated Design guarantees "Made by NEUTRIK®"
- ⑦ X-large solder contacts for up to 6 mm<sup>2</sup> (AWG 10) wires

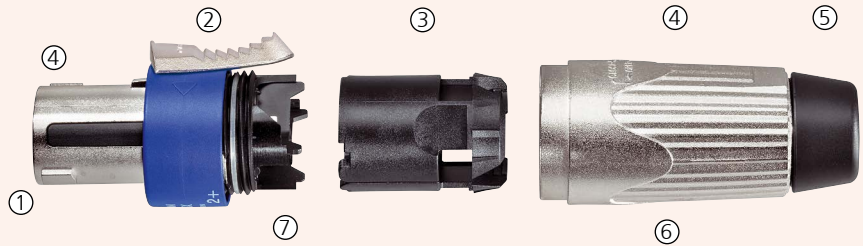

NLT4MXX



NLT8FXX

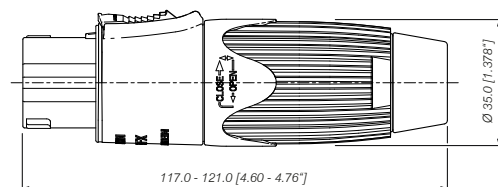



Robust metal housing



XL-solder contacts



1/4" flat tabs



## spea k O N® STXX Series Chassis Connectors



NLT4FPXX-BAG



NLT4MPXX




NLT4MPXX-BAG




NLT8MPXX-BAG

- Extremely robust metal housing designed for harsh and demanding environment
- Weatherproof design features sealing gaskets
- 4 type range – also male cable connector and female receptacle on 4 pole version
- All-metal housing makes the STXX Series rugged and durable
- Weatherproof built-in gasket meets IP 54 protection class (4 pole)
- Ideal product for touring applications and harsh environments
- Best electrical performance up to 50 A audio current
- Uses precise "Quick Lock" system
- Compatible with all currently available speakON products
- 4 pole version has UL recognized components, CSA listed


### NLT4MPXX

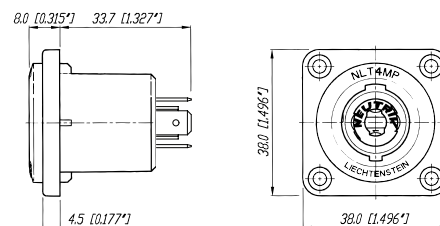

### NLT4FPXX

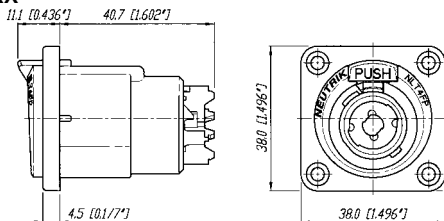

### NLT8MPXX

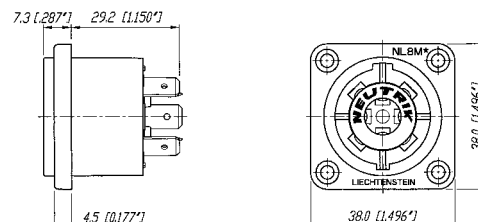

| Specification |  | SPX<br>Series<br>Cable Con. | STXX<br>Series<br>Cable Con. | speakON<br>FC<br>Cable Con | speakON<br>Chassis +<br>Combo | Adapter | STX<br>Series<br>Chassis |
|---------------|--|-----------------------------|------------------------------|----------------------------|-------------------------------|---------|--------------------------|
|---------------|--|-----------------------------|------------------------------|----------------------------|-------------------------------|---------|--------------------------|

## Electrical

|                                   |                                  |       |        |       |         |         |        |
|-----------------------------------|----------------------------------|-------|--------|-------|---------|---------|--------|
| Number of contacts                |                                  | 2 + 4 | 4 + 8  | 4 + 8 | 2, 4, 8 | 2, 4, 8 | 4 + 8  |
| Rated current per contact         | 40 A rms continuous              | ●     | ●      | 30 A  | 30 A**  | 15 A    | ●      |
| CSA approved rating               | 25 A (4 pole) rms continuous     | ●     | ●      | -     | 10 A    | -       | -      |
|                                   | 50 A audiosignal, duty cycle 50% | ●     | ●      | 40 A  | 40 A    | 30 A    | ●      |
| Combo                             | 15 A rms continuous              | -     | -      | -     | ●       | -       | -      |
| Rated voltage                     | 250 V ac                         | ●     | ●      | ●     | ●       | ●       | ●      |
| Contact resistance after lifetime | < 2 mΩ                           | ●     | ●      | ≤ 3   | ≤ 3     | ≤ 3     | ●      |
| Insulation resistance             | > 1 GΩ                           | ●     | >100MΩ | ●     | ●       | ●       | >100MΩ |
| Dielectric strength               | 4 kVac peak                      | ●     | ●      | ●     | ●       | ●       | ●      |
| 1/4" Jack                         | 1.5 kV peak                      | -     | -      | -     | -       | ●       | -      |

## Mechanical

|                              |                                            |                |                |                |        |   |   |
|------------------------------|--------------------------------------------|----------------|----------------|----------------|--------|---|---|
| Locking System               | Quick lock (latch)                         | ●              | ●              | ●              | ●      | ● | ● |
| Life time (mating cycles)    | > 5'000                                    | ●              | ●              | ●              | ●      | ● | ● |
| Cable O.D. range (mm)        | 2 pole                                     | 6 - 10         | -              | -              | -      | - | - |
|                              | 4 pole                                     | 7 - 14.5       | 9 - 16         | 6 - 15         | -      | - | - |
|                              | 8 pole                                     | -              | 8 - 20         | 8 - 20         | -      | - | - |
| Wiring                       | screw type terminals                       | 4 mm² (AWG 12) | -              | 4 mm² (AWG 12) | ● (ST) | - | - |
|                              | soldering                                  | 6 mm² (AWG 10) | 6 mm² (AWG 10) | 4 mm² (AWG 12) | ●      | - | ● |
|                              | flat tabs for 3/16" FASTON® (4.8 x 0.5 mm) | -              | -              | -              | ●      | - | - |
|                              | flat tabs for 1/4" FASTON® (6.3 x 0.8 mm)  | -              | -              | -              | ● (UC) | - | ● |
|                              | PCB-version                                | -              | -              | -              | ●      | - | ● |
| Insertion / withdrawal force | Combo Jack: ≤ 20 N / > 10 N                | -              | -              | -              | ●      | - | - |
| Cable retention force        | ≥ 220 N*                                   | ●              | ●              | ●              | -      | - | - |

## Material

|                 |                         |          |   |   |        |   |        |
|-----------------|-------------------------|----------|---|---|--------|---|--------|
| Housing         | Polyamide UL94 V-0      | -        | - | ● | ●      | ● | -      |
|                 | PBT 20% GR              | ●        | - | - | -      | - | -      |
|                 | Zinc diecast (ZnAl4Cu1) | (8 pole) | ● | - | -      | - | ●      |
| Insert          | Polyamide PA 6 30% GR   | -        | ● | - | -      | ● | ●      |
|                 | PBT 20% GR              | ●        | - | ● | -      | - | -      |
| Contacts        | Brass (CuZn39Pb3)       | ●        | ● | ● | -      | - | -      |
|                 | Bronze (CuSn6)          | -        | - | - | ●      | ● | -      |
|                 | Spring copper           | -        | ● | - | ● (UC) | - | ●      |
| Contact plating | 4 μm Ag                 | ●        | ● | ● | ●      | ● | ●      |
| Locking Element | Zinc diecast (ZnAl4Cu1) | ●        | ● | ● | -      | - | ● (FP) |
| Chuck           | Polyacetal (POM)        | ●        | ● | ● | -      | - | -      |
| Bushing         | Polyamide (PA 6 15% GR) | ●        | ● | ● | -      | - | -      |

## Environment

|                   |                             |   |        |    |   |   |        |
|-------------------|-----------------------------|---|--------|----|---|---|--------|
| Temperature range | -30 °C to +80 °C            | ● | ●      | ●  | ● | ● | ●      |
| Protection class  | IP 54 (mated condition)     | - | ●      | -  | - | - | ●      |
|                   | IP 50 (8 pole, mated cond.) | - | ●      | -  | - | - | ●      |
| Flammability      | UL94HB (*: UL94 V-0)        | ● | ●      | ●* | ● | ● | ●      |
| Finger- Safety    | IP2X/IEC 61984              | ● | ●      | ●  | ● | ● | ●      |
| Approvals         | UL-Recognized, CSA listed   | ● | 4 pole | ●  | ● | ● | 4 pole |
| Solderability     | complies with IEC 68-2-20   | ● | ●      | ●  | ● | ● | ●      |

\*: subject to cable O.D. and material

\*\* : NL4MD-V-S - Rated current per contact: 20A

## Ordering Information Cable Connectors

### SPX Series

|         |        |                                                                                                                    |
|---------|--------|--------------------------------------------------------------------------------------------------------------------|
| NL2FX   | 2 pole | Cable connector with chuck and blue bushing, intermates with 4 pole chassis connector and makes contact with +1/-1 |
| NL4FX   | 4 pole | Cable connector with chuck and black bushing                                                                       |
| NL4FX-2 | 4 pole | Cable connector with chuck and red bushing                                                                         |
| NL4FX-4 | 4 pole | Cable connector with chuck and yellow bushing                                                                      |
| NL4FX-5 | 4 pole | Cable connector with chuck and green bushing                                                                       |
| NL4FX-9 | 4 pole | Cable connector with chuck and white bushing                                                                       |
| NL4FRX  | 4 pole | Right-angle cable connector with chuck and black bushing                                                           |

### FC Series

|       |        |                                 |
|-------|--------|---------------------------------|
| NL4FC | 4 pole | Cable connector with latch lock |
| NL8FC | 8 pole | Cable connector with latch lock |

### Adapters

|           |          |                                                                                              |
|-----------|----------|----------------------------------------------------------------------------------------------|
| NA4LJX    | 4/2 pole | Adapter from speakON cable connector to 2 pole 1/4" Jack, wiring: +1 to TIP and -1 to SLEEVE |
| NL4MMX    | 4 pole   | Lockable coupler to extend two 4 pole cables                                                 |
| NL8MM-BAG | 8 pole   | Coupler to extend two 8-pole cables, black-chrome metal housing, chuck and bushing           |

### STX Series

|             |        |                                                                       |
|-------------|--------|-----------------------------------------------------------------------|
| NLT4FXX     | 4 pole | Female cable connector, nickel metal housing, chuck and bushing       |
| NLT4FXX-BAG | 4 pole | Female cable connector, black-chrome metal housing, chuck and bushing |
| NLT4MXX     | 4 pole | Male cable connector, nickel metal housing, chuck and bushing         |
| NLT4MXX-BAG | 4 pole | Male cable connector, black-chrome metal housing, chuck and bushing   |
| NLT8FX      | 8 pole | Female cable connector, nickel metal housing, chuck and bushing       |
| NLT8FX-BAG  | 8 pole | Female cable connector, black-chrome metal housing, chuck and bushing |
| NLT8MX-BAG  | 8 pole | Male cable connector, black-chrome metal housing, chuck and bushing   |

### Accessories



### SPX Series

|       |                                                                                                                                                     |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| LCR-* | Colored coding rings for the right-angle version of the SPX Series.<br>Available in blue (Standard), white, red, green and yellow.                  |
| LRX   | Right-angle speakON conversion kit for changing the straight connector NL4FX into a right-angle version without removing the cable from the insert. |
| NLRR  | Strain relief reduction ring for NL4FX for thin loudspeaker cables with an O.D. of 5 to 8 mm                                                        |
| HTFAC | Hand tool for tightening the bushing of the speakON NL4FC and the powerCON 20A cable connectors.                                                    |

### FC Series


|       |                                                                                                                                                                                              |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| BSL-* | Colored 2 component bushing for NL4FC<br>*: 0 - Black, 1- Brown, 2 - Red, 3 - Orange, 4 - Yellow, 5 - Green, 6 - Blue, 7 - Violet, 8 - Grey, 9 - White; Must be ordered in multiples of 100. |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|






## Ordering Information Chassis Connectors

Flange layout:

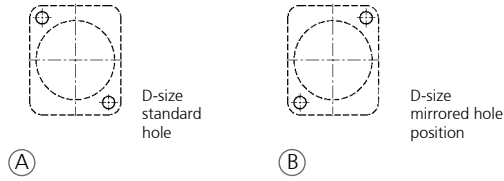

Hole layout:

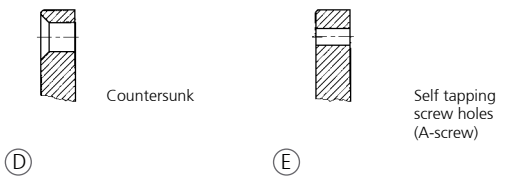

|                      | Pole | Flange size          | Flange layout | Fastening method | Color        | Wiring           | Remarks                                        |
|----------------------|------|----------------------|---------------|------------------|--------------|------------------|------------------------------------------------|
| <b>Traditionally</b> |      |                      |               |                  |              |                  |                                                |
| NL2MPXX              | 2    | D-size               | A             | D                | black        | 3/16" flat tabs* | Does not intermate with 4-pole cable connector |
| NL2MDXX-H-3          | 2    | D-size               | A             | E                | black        | horizontal PCB   | Does not intermate with 4-pole cable connector |
| NL2MDXX-V            | 2    | D-size               | A             | D                | black        | vertical PCB     | Does not intermate with 4-pole cable connector |
| NL2MDXX-V-3          | 2    | D-size               | A             | E                | black        | vertical PCB     | Does not intermate with 4-pole cable connector |
| NL4MPXX              | 4    | D-size               | A             | D                | black        | 3/16" flat tabs* |                                                |
| NL4MPXX-3            | 4    | D-size               | A             | E                | black        | 3/16" flat tabs* |                                                |
| NL4MDXX-H-2          | 4    | D-size               | B             | E                | black        | horizontal PCB   |                                                |
| NL4MDXX-H-3          | 4    | D-size               | A             | E                | black        | horizontal PCB   |                                                |
| NL4MDXX-V            | 4    | D-size               | A             | D                | black        | vertical PCB     |                                                |
| NL4MDXX-V-3          | 4    | D-size               | A             | E                | black        | vertical PCB     |                                                |
| NL4MDXX-V-2          | 4    | D-size               | B             | E                | black        | vertical PCB     |                                                |
| NL4MPXX-ST           | 4    | D-size               | A             | D                | black        | screw terminal   |                                                |
| NL4MPXX-UC           | 4    | D-size               | A             | D                | black        | 1/4" flat tabs*  | Ultra high current, up to 40 A rms             |
| NL4MPRXX             | 4    | round G-size flange  | C             | D                | black        | 3/16" flat tabs* |                                                |
| NL8MDXX-V            | 8    | square G-size flange | C             | D                | Ni           | vertical PCB     |                                                |
| NL8MDXX-V-BAG        | 8    | square G-size flange | C             | D                | black chrome | vertical PCB     |                                                |
| NL8MDXX-V-3          | 8    | square G-size flange | C             | E                | Ni           | vertical PCB     |                                                |
| NL8MPRXX             | 8    | square G-size flange | C             | D                | Ni           | 3/16" flat tabs* |                                                |
| NL8MPRXX-BAG         | 8    | square G-size flange | C             | D                | black chrome | 3/16" flat tabs* |                                                |

### STX Series

|              |   |                      |   |   |              |                 |  |
|--------------|---|----------------------|---|---|--------------|-----------------|--|
| NLT4MPXX     | 4 | square G-size flange | C | D | nickel       | 1/4" flat tabs* |  |
| NLT4MPXX-BAG | 4 | square G-size flange | C | D | black chrome | 1/4" flat tabs* |  |
| NLT4MDXX-V-3 | 4 | square G-size flange | C | E | nickel       | vertical PCB    |  |
| NLT4MDXX-V   | 4 | square G-size flange | C | D | nickel       | vertical PCB    |  |
| NLT4FPXX     | 4 | square G-size flange | C | D | nickel       | solder contacts |  |
| NLT4FPXX-BAG | 4 | square G-size flange | C | D | black chrome | solder contacts |  |
| NLT4FD-V-BAG | 4 | square G-size flange | C | D | black chrome | vertical PCB    |  |
| NLT8MPXX     | 8 | square G-size flange | C | D | nickel       | 1/4" flat tabs* |  |
| NLT8MPXX-BAG | 8 | square G-size flange | C | D | black chrome | 1/4" flat tabs* |  |
| NLT8FPXX-BAG | 8 | square G-size flange | C | D | black chrome | solder contacts |  |

\*: flat tabs to be used with FASTON® connectors or to solder the wire (FASTON® is a trademark of AMP Inc.)

## Ordering Information Chassis Connectors

|  | Pole | Flange size | Flange layout | Fastening method | Color | Wiring | Remarks |
|--|------|-------------|---------------|------------------|-------|--------|---------|
|--|------|-------------|---------------|------------------|-------|--------|---------|

### Combo Series

|            |   |        |   |   |       |                |  |
|------------|---|--------|---|---|-------|----------------|--|
| NLJ2MDXX-V | 2 | D-size | A | E | green | vertical PCB   |  |
| NLJ2MD-V-1 | 2 | D-size | A | E | grey  | vertical PCB   |  |
| NLJ2MDXX-H | 2 | D-size | A | E | green | horizontal PCB |  |

### Accessories



A-Screw-1-8



E-Screw1-12Ni



E-Screw1-12B



NLFASTON



MFD



NDL



SCL



SCDR



SCDX



SCCD-W



SCDP-\*



SCNLT



Example: SCNLT + NLT4MP\*



NZP1RU-12

|               |                                                                                                                                                                                                     |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A-Screw-1-8   | Black self tapping PLASTITE** screw 2.9 x 1.05 tri-rondular configuration, 8 mm long, panhead, for rear panel mount (A, AA and speakON Combo)                                                       |
| E-Screw1-12Ni | Nickel self-tapping PLASTITE® countersunk screw 2.9 x 12 for rear panel mount, only suitable for panels with countersunk thru holes                                                                 |
| E-Screw1-12B  | Black self-tapping PLASTITE® countersunk screw 2.9 x 12 for rear panel mount, only suitable for panels with countersunk thru holes                                                                  |
| NLFASTON      | FASTON® receptacle for tabs with "positiv lock" for use with NL4MP, NL4MPR, NL8MPR, Pack of 100 pcs.                                                                                                |
| MFD           | M3 mounting frame for D-size chassis                                                                                                                                                                |
| NDL           | dummyPLUG for 2 & 4 Pole chassis connector                                                                                                                                                          |
| NZP1RU-8      | Panel 1RU housing with 8 D-shape cutouts                                                                                                                                                            |
| NZP1RU-12     | Panel 1RU housing with 12 D-shape cutouts                                                                                                                                                           |
| SCL           | Plastic sealing cover to protect the connectors against dust and moisture                                                                                                                           |
| SCDR          | Rear end protection cover for D-size chassis connectors                                                                                                                                             |
| SCDP-*        | D-Size sealing gaskets, color coding                                                                                                                                                                |
| SCDX          | Hinged cover seals D-size chassis connectors, IP 42 rated                                                                                                                                           |
| SCCD-W        | Spring-loaded cover to seals for D-size chassis Connectors, IP 65 rated                                                                                                                             |
| SCNLT         | Gasket for NLT4MP<br>(To make a cabinet with an Amphenol EP cutout airtight, use the rubber sealing which covers the entire hole.)<br>(*: 0- black, 2- red, 4- yellow, 5- green, 6- blue, 9- white) |
|               | *PLASTITE® is a registered trademark of SFS Unimarket                                                                                                                                               |










## Wiring Suggestion

Positive signal on speaker pin "+" produces positive wave-form from driver (moves cone outwards)

"+" = In phase (high) "-" = Ground (out of phase, low)  
Lower numbers for lower frequencies.

|                              | AMPLIFIER                                                                                                                                   | CABLE                                                                                     | SPEAKER                                                                                                                                     |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Stereo ("HiFi")</b>       | one NL4MP socket<br>left channel pins 1+/1-<br>right channel pins 2+/2-                                                                     | NL4FC on amplifier end, four conductor cable splits into two pairs with NL4FX on each end | one NL4MP per speaker<br>left speaker pins 1+/1-<br>right speaker pins 2+/2-                                                                |
| <b>POWER ("PA") Standard</b> | three NL4MP sockets<br>"A" socket:<br>left channel pins 1+/1-<br>"B" socket:<br>right channel pins 1+/1-                                    | a two-conductor cable for each channel with NL4FX on both ends                            | NL4MP pins 1+ to speaker coil "+"<br>NL4MP pins 1- and 2+ to speaker coil "-"                                                               |
| <b>Bridged mono</b>          | "M" socket:<br>left channel pins 1+/1-<br>right channel pins 2+/2-                                                                          | a special two-conductor cable, on both ends wired to pin 1+/2+ of NL4FX                   | NL4MP pin 1+ to speaker coil "+"<br>NL4MP pins 1- and 2+ to speaker coil "-"                                                                |
| <b>Bi-Amp</b>                | one NL4MP socket<br>low frequency pins 1+/1-<br>high frequency pins 2+/2-                                                                   | a four-conductor cable on both ends wired to pins 1+/1-, 2+/2- of NL4FX                   | one NL4MP socket<br>low frequency pins 1+/1-<br>high frequency pins 2+/2-                                                                   |
| <b>4 Way System</b>          | one NL8MPR socket<br>low frequency pins 1+/1-<br>low mid frequency pins 2+/2-<br>high mid frequency pins 3+/3-<br>high frequency pins 4+/4- | an eight-conductor cable wired on both ends to pins 1+/1-, 2+/2-, 3+/3-, 4+/4- of NL8FC   | one NL8MPR socket<br>low frequency pins 1+/1-<br>low mid frequency pins 2+/2-<br>high mid frequency pins 3+/3-<br>high frequency pins 4+/4- |

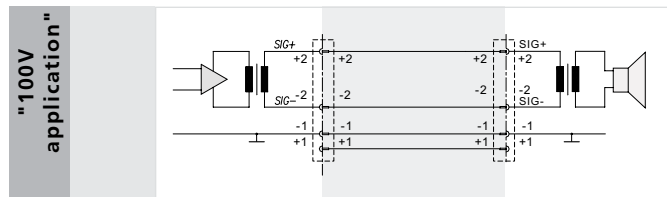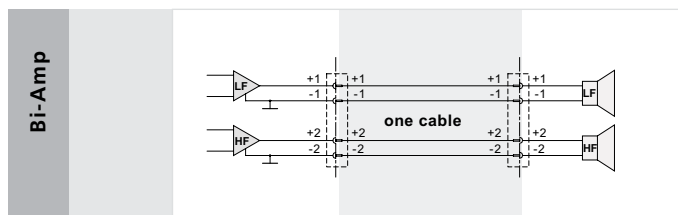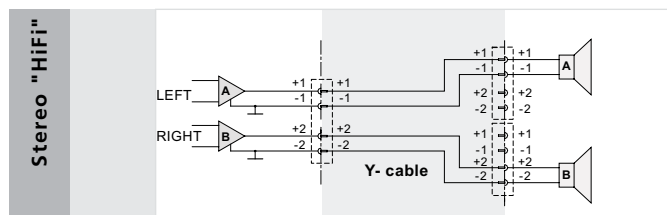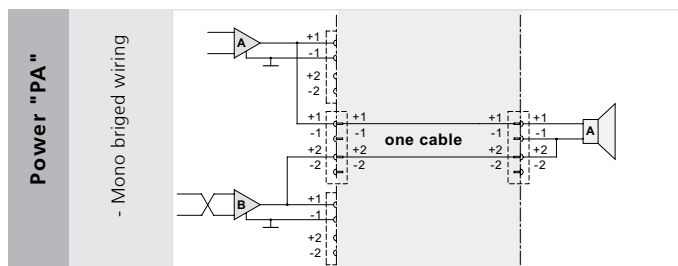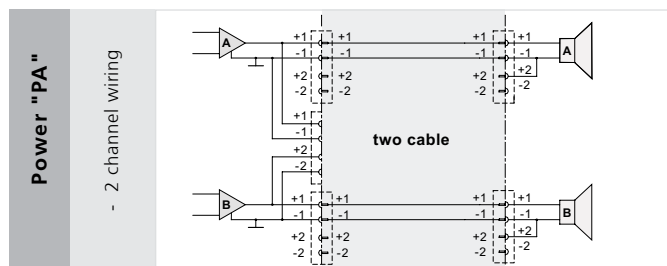

## Definitions, Abbreviations & Useful Information

### ELEMENTS

|           |                 |
|-----------|-----------------|
| <b>Ag</b> | Silver          |
| <b>Al</b> | Aluminium       |
| <b>Au</b> | Gold            |
| <b>Co</b> | Cobalt          |
| <b>Cr</b> | Chromium        |
| <b>Cu</b> | Copper          |
| <b>Ni</b> | Nickel          |
| <b>P</b>  | Phosphorus      |
| <b>Pb</b> | Lead            |
| <b>Pd</b> | Palladium       |
| <b>Sn</b> | Tin             |
| <b>Zn</b> | Zinc            |
| <b>SS</b> | Stainless Steel |

### ALLOYS, PLASTICS, POLYMERS

|                       |                                  |
|-----------------------|----------------------------------|
| <b>Brass (Alloy)</b>  | CuZn39Pb3                        |
| <b>Bronze (Alloy)</b> | CuSn6                            |
| <b>Ck 67</b>          | Carbon Steel                     |
| <b>EPDM</b>           | Ethylene Propylene               |
| <b>GR</b>             | Glass Reinforced                 |
| <b>PA</b>             | Polyamide                        |
| <b>PBTP</b>           | Polybutylene Terephthalate       |
| <b>POM</b>            | Polyacetal                       |
| <b>PTFE</b>           | PolyTetraFluoroEthylene (TEFLON) |
| <b>PUR</b>            | Polyurethane                     |
|                       |                                  |
|                       |                                  |

### MEASUREMENT LEGEND

|           |                  |
|-----------|------------------|
| <b>N</b>  | Newton           |
| <b>Ω</b>  | Ohm              |
| <b>μ</b>  | Micro            |
| <b>OD</b> | Outside Diameter |
| <b>m</b>  | Meter(s)         |
| <b>k</b>  | Kilo             |

### ENGLISH TO METRIC CONVERSIONS

|                  |         |                  |
|------------------|---------|------------------|
| <b>1/8 inch</b>  | 3.175   | millimeters (mm) |
| <b>1/4 inch</b>  | 6.35    | millimeters (mm) |
| <b>1 inch</b>    | 25.4    | millimeters (mm) |
|                  | 2.54 cm | 1 inch           |
| <b>1 foot</b>    | 30.48   | centimeters (cm) |
|                  | 0.305   | meter (m)        |
| <b>6 foot</b>    | 1.828   | meters (m)       |
| <b>50 foot</b>   | 15.24   | meters (m)       |
| <b>100 foot</b>  | 30.48   | meters (m)       |
| <b>1000 foot</b> | 304.8   | meters (m)       |

### METRIC TO ENGLISH CONVERSIONS

|                     |         |        |
|---------------------|---------|--------|
| <b>1 centimeter</b> | 0.3937  | inches |
| <b>1 meter</b>      | 39.37   | inches |
| <b>3.281 meter</b>  | 10      | feet   |
| <b>10 meters</b>    | 32.808  | feet   |
| <b>50 meters</b>    | 164.041 | feet   |
| <b>100 meters</b>   | 328.084 | feet   |

### OTHER ABBREVIATIONS

|                                                                                     |                                                                                                                                             |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| <b>UL®</b>                                                                          | Underwriters Laboratories                                                                                                                   |
| <b>IP Rating</b>                                                                    | Ingress Protection rating for objects and water ACC IEC529/EN60529                                                                          |
| <b>IEC</b>                                                                          | International Electrotechnical Commission is the international standards and conformity assessment body for all fields of electrotechnology |
|  | UL Recognized Component Mark                                                                                                                |

|                                                                                     |                                                                                                                |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
|  | <b>ENEC</b> – European norms electrical certification, demonstrates compliance with European safety standards. |
|  | <b>VDE</b> Association for Electrical, Electronic and Information Technologies e.V.                            |
| <b>AWG</b>                                                                          | American Wire Gauge                                                                                            |

**NEUTRIK, crystalCON®, etherCON®, maxCON®, miniCON®, nanoCON®, neutriCON®, opticalCON®, powerCON®, powerCON®TRUE1®, rofi®, rearTWIST®, silentPLUG®, speakON®, TOP®, DiWA®, XIRIUM®,** are registered trademarks of Neutrik AG.

## Neutrik® Part Number Guide

### NC3FAH1-B-0-D

|                            |                                                    |                                                                    |
|----------------------------|----------------------------------------------------|--------------------------------------------------------------------|
| <b>Packaging:</b>          | <b>D</b>                                           | Cable connector: bulk packed                                       |
| <b>Assembly:</b>           | <b>D</b>                                           | Chassis connector: disassembled push latch                         |
| <b>Retention:</b>          | <b>w/o</b>                                         | Latch lock                                                         |
|                            | <b>-0</b>                                          | Retention spring                                                   |
|                            | <b>-DA</b>                                         | Asymmetric PUSH                                                    |
| <b>Shell:</b>              | <b>B</b>                                           | Black shell, gold contacts                                         |
|                            | <b>BAG</b>                                         | Black shell, silver contacts                                       |
| <b>Grounding:</b>          | <b>0</b>                                           | Separate ground contact connected to shell, male only              |
|                            | <b>1</b>                                           | Pin 1 & panel & shell connected, no separate ground contact        |
|                            | <b>2</b>                                           | Separate ground contact connected to shell & panel, separate Pin 1 |
|                            | <b>E</b>                                           | Additional ground contacts                                         |
|                            | <b>w/o number</b>                                  | No ground /shell contact (except 4/5 pole), female only            |
| <b>Termination:</b>        | <b>H</b>                                           | Horizontal PCB mount                                               |
|                            | <b>HL</b>                                          | Lateral left PCB mount                                             |
|                            | <b>HR</b>                                          | Lateral right PCB mount                                            |
|                            | <b>L</b>                                           | Solder cups                                                        |
|                            | <b>V</b>                                           | Vertical PCB mount                                                 |
|                            | <b>Y</b>                                           | IDC for wires (no ground)                                          |
|                            | <b>M3</b>                                          | Mounting holes with M3 thread                                      |
|                            | <b>M25</b>                                         | Mounting holes with M2.5 thread                                    |
|                            | <b>-</b>                                           | Not applicable                                                     |
| <b>Series:</b>             | <b>A, AA, B, D, DL, DLX, MPR, P, PX, RX, X, XX</b> |                                                                    |
| <b>Gender:</b>             | <b>F</b>                                           | Female                                                             |
|                            | <b>M</b>                                           | Male                                                               |
| <b>Number of Contacts:</b> | <b>2, 3, 4, 5, 6, 7, 8, 12</b>                     |                                                                    |
| <b>Connector Type:</b>     | <b>A</b>                                           | Adapter                                                            |
|                            | <b>AC</b>                                          | powerCON®                                                          |
|                            | <b>B</b>                                           | BNC                                                                |
|                            | <b>C</b>                                           | XLR                                                                |
|                            | <b>D</b>                                           | dummyPLUG                                                          |
|                            | <b>E</b>                                           | etherCON® - RJ45                                                   |
|                            | <b>F</b>                                           | RCA / CINCH                                                        |
|                            | <b>J (MJ, RJ, SJ)</b>                              | Jack                                                               |
|                            | <b>K</b>                                           | Cable Assembly                                                     |
|                            | <b>L</b>                                           | speakON® - Loudspeaker                                             |
|                            | <b>M</b>                                           | Module                                                             |
|                            | <b>O</b>                                           | opticalCON - Fiber Optic Connector                                 |
|                            | <b>P</b>                                           | Plug                                                               |
|                            | <b>PP</b>                                          | Patch Panel                                                        |
|                            | <b>R</b>                                           | Circular Connector                                                 |
|                            | <b>T</b>                                           | Transformer                                                        |
|                            | <b>TOP</b>                                         | True Outdoor Protection                                            |

Definitions, abbreviations & useful information see page 17.

# Neutrik® Product Line

## XLR Connectors



## Plugs & Jacks




## speakON® Connectors



## Data Connectors



## 75 Ohm BNC Connectors

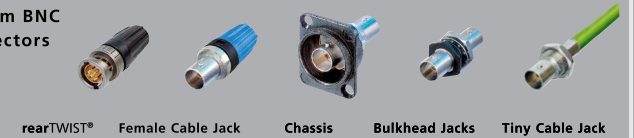

## Circular Connectors



## powerCON® Connectors



## Accessories



## Digital Audio Network



## Patch Panels





The premium brand of the Neutrik Group

#### LIECHTENSTEIN (HEADQUARTERS)

Neutrik AG, Im alten Riet 143, 9494 Schaan  
T +423 237 24 24, F +423 232 53 93, [neutrik@neutrikgroup.com](mailto:neutrik@neutrikgroup.com)

#### GERMANY / NETHERLANDS / DENMARK / AUSTRIA

Neutrik Vertriebs GmbH, Felix-Wankel-Straße 1, 85221 Dachau, Germany  
T +49 8131 28 08 90, [neutrik@neutrikgroup.de](mailto:neutrik@neutrikgroup.de)

#### GREAT BRITAIN

Neutrik (UK) Ltd., Westridge Business Park, Cothey Way  
Ryde, Isle of Wight PO33 1 QT  
T +44 1983 811 441, [sales@neutrikgroup.co.uk](mailto:sales@neutrikgroup.co.uk)

#### FRANCE

Neutrik France SARL, 52 rue d'aguesseau, 1er etage, 92100 Boulogne-Billancourt  
T +33 1 41 31 67 50, [info@neutrikgroup.fr](mailto:info@neutrikgroup.fr)

#### USA

NeutrikAmericas, 4115 Taggart Creek Road, Charlotte, North Carolina, 28208  
T +1 704 972 3050, [info@neutrikusa.com](mailto:info@neutrikusa.com)

#### JAPAN

Neutrik Limited, Yusen-Higashinibashi-Ekimae Bldg., 3-7-19  
Higashinibashi, Chuo-ku, Tokyo 103  
T +81 3 3663 47 33, [mail@neutrik.co.jp](mailto:mail@neutrik.co.jp)

#### HONG KONG

Neutrik Hong Kong Ltd., Suite 18, 7th Floor Shatin Galleria  
Fotan, Shatin  
T +852 2687 6055, [sales@neutrik.com.hk](mailto:sales@neutrik.com.hk)

#### CHINA

Ningbo Neutrik Trading Co., Ltd., Shiqi Street, Yinxian Road West  
Fengjia Village, Hai Shu Area, Ningbo, Zhejiang, 315153  
T +86 574 88250833, [sales@neutrik.com.cn](mailto:sales@neutrik.com.cn)

#### ASSOCIATED COMPANIES

##### Contrik AG


Steinackerstrasse 35, 8902 Urdorf, Switzerland  
T +41 44 736 50 10, [contrik@contrik.ch](mailto:contrik@contrik.ch)

##### H. Adam GmbH

Felix-Wankel-Straße 1, 85221 Dachau, Germany  
T +49 08131 28 08-0, [anfrage@adam-gmbh.de](mailto:anfrage@adam-gmbh.de)

##### CONNEX GmbH

Elberstraße 12, 26135 Oldenburg, Germany  
T +49 441 380398-0, [info@connex.de](mailto:info@connex.de)



[www.neutrik.com](http://www.neutrik.com)