



**HESTORE.HU**


elektronikai alkatrész áruház

**EN:** This Datasheet is presented by the manufacturer.


Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).




## HC-49/S Low Profile Crystal



HC-49/SS



HC-49/S



### FEATURES

- Standard Frequencies Ex-Stock
- Low Cost Solution
- Standard I.C Height
- Standard HC49U Base

### APPLICATIONS

- Microprocessor Systems
- Datacommunications
- Consumer Electronics
- Automotive Electronics

#### STANDARD SPECIFICATION


Frequency Range: 3.20 MHz to 70.00 MHz  
 Adjustment Tolerance at 25°C: ±30PPM Max.  
 Frequency Stability: ±50PPM Max.  
 Operating Temperature Range: -10°C to +60°C  
 Load Capacity: 30pF  
 E.S.R: See Table  
 Drive level: 100 MicroWatt  
 Ageing: ±5PPM 1st Year Max.

Frequency Range	E.S.R	Mode
3.2 MHz ~ 3.49 MHz	200	Fund
3.5 MHz ~ 3.99 MHz	140	Fund
4.0 MHz ~ 4.39 MHz	120	Fund
4.4 MHz ~ 4.89 MHz	100	Fund
4.9 MHz ~ 5.99 MHz	80	Fund
6.0 MHz ~ 6.99 MHz	60	Fund
7.0 MHz ~ 7.99 MHz	50	Fund
8.0 MHz ~ 10.99 MHz	45	Fund
11.0 MHz ~ 11.99 MHz	40	Fund
12.0 MHz ~ 14.99 MHz	35	Fund
15.0 MHz ~ 36.00 MHz	30	Fund
27.0 MHz ~ 70.00 MHz	100	3 O/T

#### AVAILABLE OPTIONS

Frequency Range: 3.2 MHz ~ 70.0 MHz  
 Adjustment Tolerance: ±10PPM ~ ± 100PPM  
 Load Capacity: Series or 9pF ~ 50pF  
 Shunt Capacity (C0): 4.5pF ~ 7pF (Typ.)  
 Dynamic Capacity (C1): 18fF ~ 20fF (Typ.)

#### Frequency Stability vs Operating Temperature Range

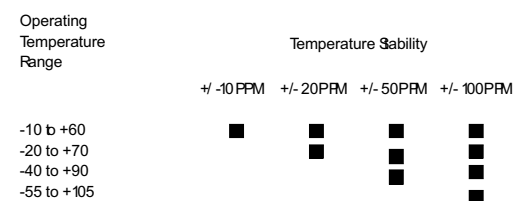

#### Value Added Services

In addition, AEL Crystals Ltd are able to offer our customers the following value added services:-

- Fitted Insulators
- Radial Taping
- Lead Pre-Forming
- Lead Cropping
- Earth Lead
- Bar-Coding



[www.aelcrystals.co.uk](http://www.aelcrystals.co.uk)

quartz based frequency control components

Order Hotline +44 1293 524245

[www.aelcrystals.co.uk](http://www.aelcrystals.co.uk)  
[sales@aelcrystals.co.uk](mailto:sales@aelcrystals.co.uk)