
EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

Instruction manual of KWS-AC300 power meter

1: Temperature
2: Voltage
3: Power
4: Current
5: Keystroke
6: Timing
7: Power factor
8: Electrical energy

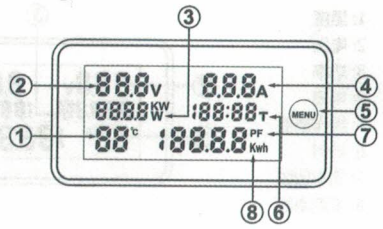

Product Model

KWS-AC300-20A / With internal shunt
KWS-AC300-100A/ With external shunt

Product Function

1. Voltage, current, power, timing, temperature
Cumulative electrical energy
2. Electric energy and timing can be reset
3. Electric energy and timing have power-down memory function
4. Rated frequency 45-65Hz


Product Parameter

Model: KWS-AC300-20A	Model: KWS-AC300-100A
Voltage: AC50-300V	Voltage: AC50-300V
Current: 0-20A	Current: 0-100A
Power: 0-4400W	Power: 0-30KW
Capacity: 0.01-19999Kwh	Capacity: 0.01-19999Kwh
Timing: 0-200H	Timing: 0-200H
Temperature: -9℃-99℃	Temperature: -9℃-99℃


Operating Instructions

Click the MENU button on the panel to view the power factor and cumulative electrical energy. Electric energy and timing reset method: Press and hold the MENU button for 5 seconds, the number in the timing area will flash, then click the button to select timing, energy reset. When the number flashes, double-click the button to reset. Press and hold the button for 5 seconds to save the settings.


Wiring diagram of KWS-AC300-20A

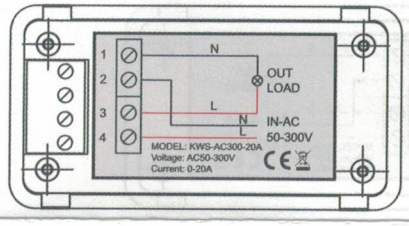

Wiring diagram of KWS-AC300-100A

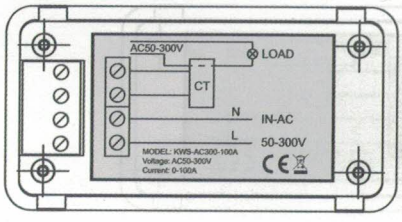

Product size chart

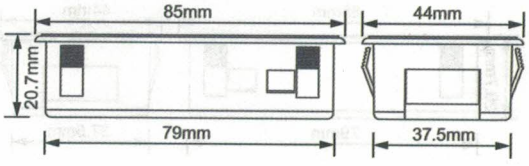

*All parameters are for reference only,the actual object prevails.