
**EN:** This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.


# TEC1-12715 Datasheet

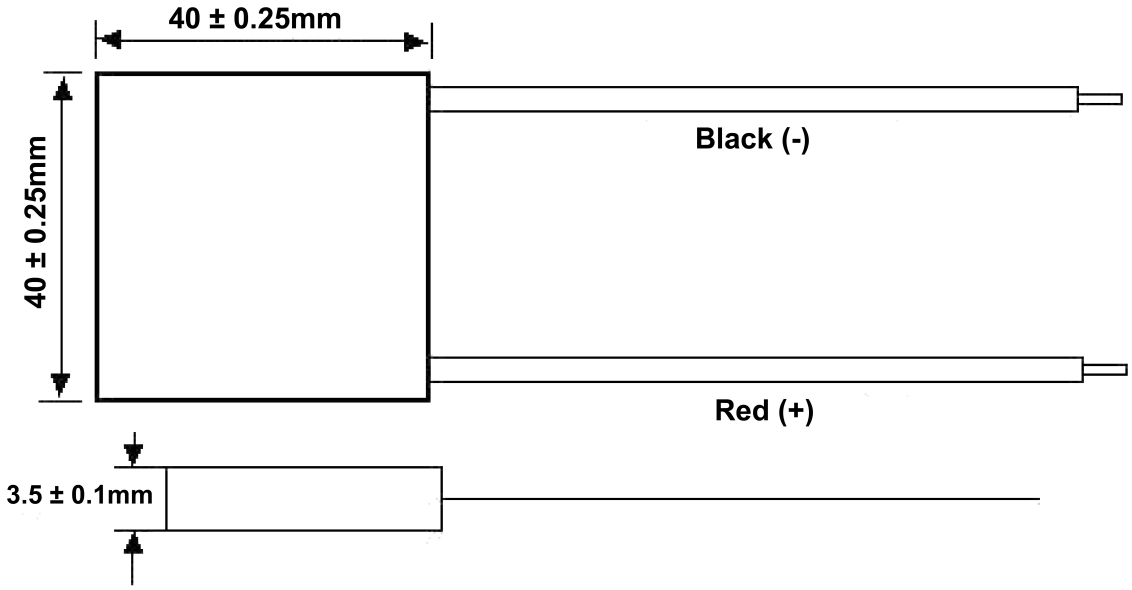


| No. | Items | Symbol | Parameter | Condition |
|---|---|---|---|---|
| 1 | Max. Operating Tem. | T | ＜90℃ | |
| 2 | Max. Cooling Power | Qmax | 150W | Vacuum testing Tem Th=30℃ |
| 3 | Tem. Difference Max | △Tmax | 70°C | Vacuum testing Tem Th=30℃ |
| 4 | Input Voltage Max | Vmax | 15.4V | Vacuum testing Tem Th=30℃ |
| 5 | Max. Current | Imax | 15A | Vacuum testing Tem Th=30℃ |
| 6 | Resistance | R | 0.75±0.05 | Ambient Tem Th=25℃ |
| 7 | Parallel | | ≤0.05 ㎜ | |
| 8 | Lines | | 20AWG | |

**When the ambient temperature raise or fall 1℃, the module resistance will raise or fall 0.015 accordingly.**

# TEC1-12715 Datasheet

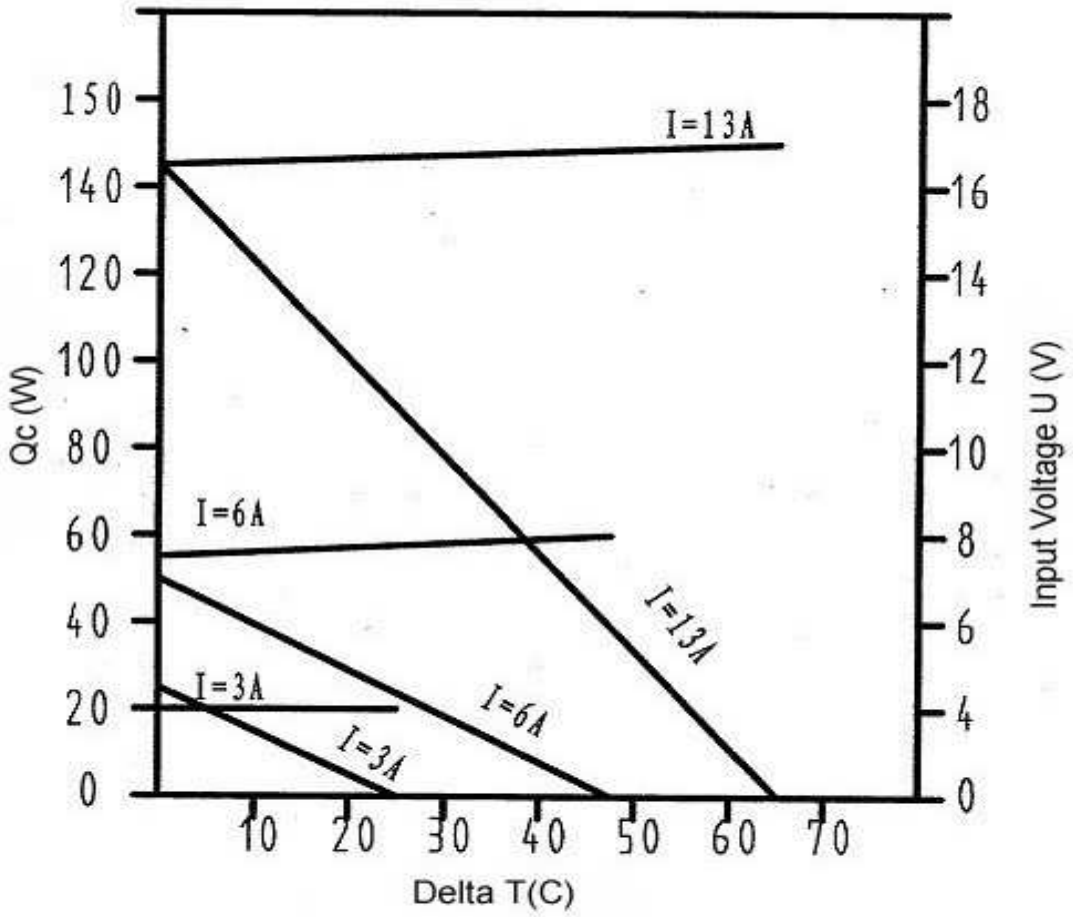


40X40 12715 Input Output Characteristic