EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

CR2032 MFR

3V Lithium Battery


Technical Data Sheet

Specifications

Chemical System	Li / MnO_2
Nominal Voltage	3 V
Rated Capacity	225 mAh
Standard Discharge Current	0.4 mA
Max. Cont. Discharge Current	3.0 mA
Average Weight	2.8 g
Temperature Range	-30 - +60 °C
Self Discharge at 23°C	< 1% / year


Dimensions

(According to IEC 60086)

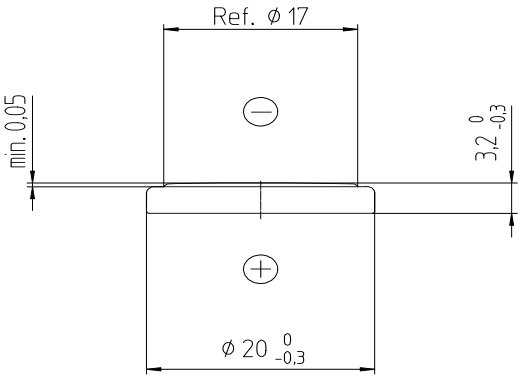


Performance


Discharge performance at 23°C

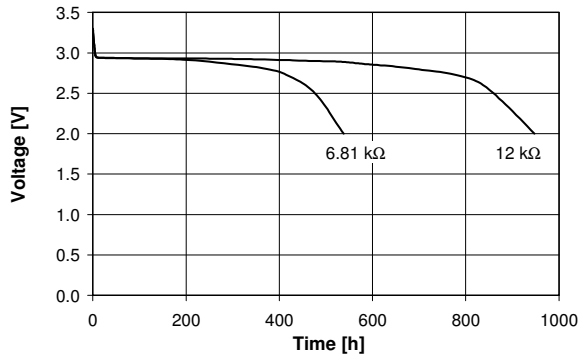


Discharge performance at 23°C

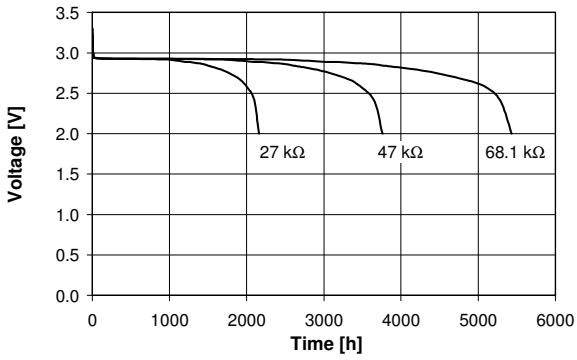

Temperature performance Load 12kΩ

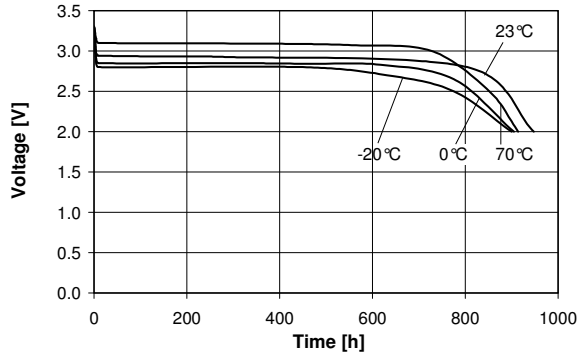

Cell capacity at various loads

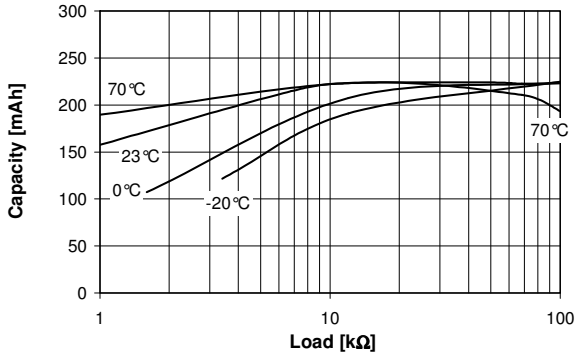

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative.

Rev. CR2032MFR.03 / 12.06

Distributed by: Jauch Quartz GmbH · In der Lache 24 · D-78056 Villingen-Schwenningen
Phone: +49 (0) 7720 945 0 · Fax: +49 (0) 7720 945 102 · Email: info@jauch-batteries.com · www.jauch-batteries.com