



HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.


ID SERIES DATASHEET Feb 10 , 2004

ID-2 / ID-12 / ID-20

The ID2, ID12 and ID20 are similar to the ID0, ID10 and ID15 MK(ii) series devices, but they have extra pins which allow Magnetic Emulation output to be included in the functionality. The ID-12 and ID-20 come with internal antennas, and have read ranges of 12+ cm and 16+ cm, respectively. With an external antenna, the ID-2 can deliver read ranges of up to 25 cm. All three readers support ASCII, Wiegand26 and Magnetic ABA Track2 data formats.



ID2 / ID12 / ID20 PIN-OUT



1. GND
2. RES (Reset Bar)
3. ANT (Antenna)
4. ANT (Antenna)
5. CP
6. Future
7. +/- (Format Selector)
8. D1 (Data Pin 1)
9. D0 (Data Pin 0)
10. LED (LED / Beeper)
11. +5V

Operational and Physical Characteristics

| Parameters | ID-2 | ID-12 | ID-20 |
|----------------------|-------------------------------|-------------------------------|-------------------------------|
| Read Range | N/A (no internal antenna) | 12+ cm | 16+ cm |
| Dimensions | 21 mm x 19 mm x 6 mm | 26 mm x 25 mm x 7 mm | 40 mm x 40 mm x 9 mm |
| Frequency | 125 kHz | 125 kHz | 125 kHz |
| Card Format | EM 4001 or compatible | EM 4001 or compatible | EM 4001 or compatible |
| Encoding | Manchester 64-bit, modulus 64 | Manchester 64-bit, modulus 64 | Manchester 64-bit, modulus 64 |
| Power Requirement | 5 VDC @ 13mA nominal | 5 VDC @ 30mA nominal | 5 VDC @ 65mA nominal |
| I/O Output Current | +/-200mA PK | - | - |
| Voltage Supply Range | +4.6V through +5.4V | +4.6V through +5.4V | +4.6V through +5.4V |

Pin Description & Output Data Formats


| Pin No. | Description | ASCII | Magnet Emulation | Wiegand26 |
|---------|--|---------------------|------------------|--------------|
| Pin 1 | Zero Volts and Tuning Capacitor Ground | GND 0V | GND 0V | GND 0V |
| Pin 2 | Strap to +5V | Reset Bar | Reset Bar | Reset Bar |
| Pin 3 | To External Antenna and Tuning Capacitor | Antenna | Antenna | Antenna |
| Pin 4 | To External Antenna | Antenna | Antenna | Antenna |
| Pin 5 | Card Present | No function | Card Present | No function |
| Pin 6 | Future | Future | Future | Future |
| Pin 7 | Format Selector (+/-) | Strap to GND | Strap to Pin 10 | Strap to +5V |
| Pin 8 | Data 1 | CMOS | Clock | One Output |
| Pin 9 | Data 0 | TTL Data (inverted) | Data | Zero Output |
| Pin 10 | 3.1 kHz Logic | Beeper / LED | Beeper / LED | Beeper / LED |
| Pin 11 | DC Voltage Supply | +5V | +5V | +5V |

ID Innovations

Advanced Digital Reader Technology

---Better by Design

Circuit Diagram for the ID0

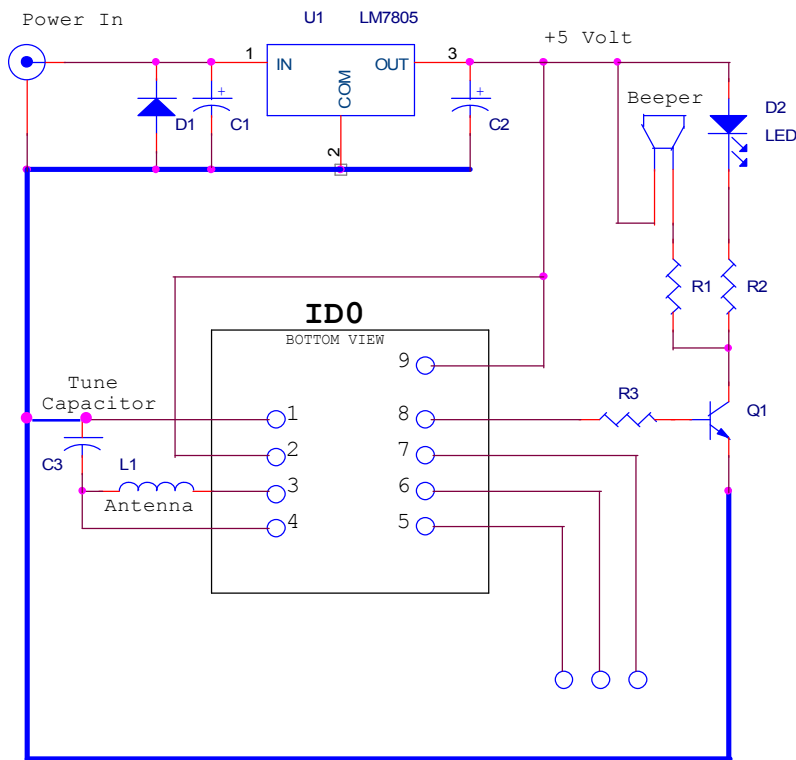

COMPONENT LIST


- R1 = 100R
- R2 = 1K
- R3 = 1K
- C1 = 100uF 16V
- C2 = 100uF 10V
- C3 = 1nF COG 100V *
- Beeper = 2.7-3.5KHz 100R
- D1 = 1N4001
- D2 = GREEN LED
- U1 = LM7805
- Q1 = UTC8050 (NPN)
- L1 = 640uH

ID0 = ID Innovations ID0

* Please Note the ID0 has an internal tuning capacitor of 1.5nF and this makes the total tuning capacity = 2.5nF

The 3.1Khz Beeper Logic is centered for most Beepers in range 2.7-3.5Khz

Circuit Diagram for the ID2

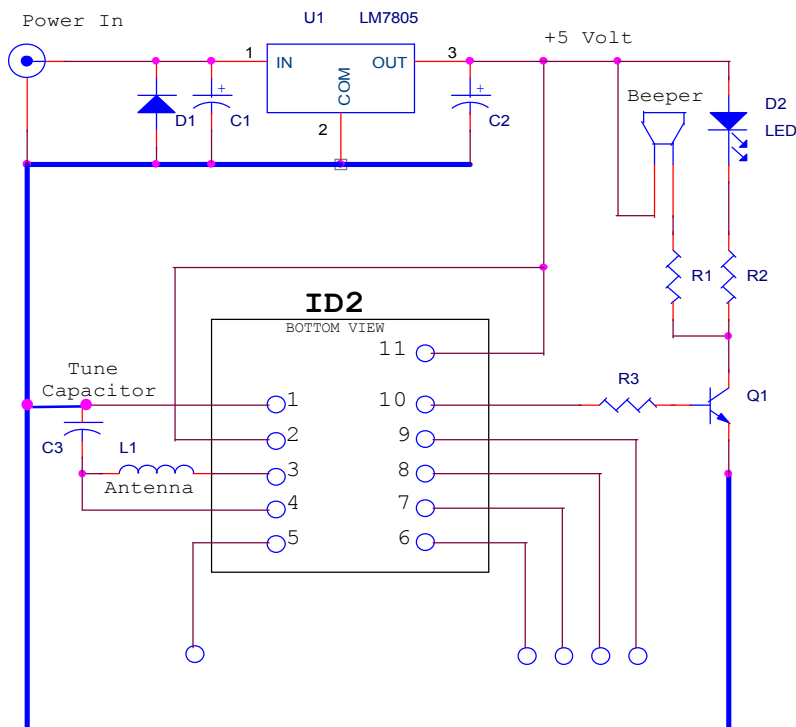

COMPONENT LIST

- R1 = 100R
- R2 = 1K
- R3 = 1K
- C1 = 100uF 16V
- C2 = 100uF 10V
- C3 = 1nF COG 100V *
- Beeper = 2.7-3.5KHz 100R
- D1 = 1N4001
- D2 = GREEN LED
- U1 = LM7805
- Q1 = UTC8050 (NPN)
- L1 = 640uH

ID2 = ID Innovations ID2

* Please Note the ID2 has an internal tuning capacitor of 1.5nF and this makes the total tuning capacity = 2.5nF


The 3.1Khz Beeper Logic is centered for most Beepers in range 2.7-3.5Khz

ID Innovations

Advanced Digital Reader Technology

----Better by Design

Circuit Diagram for the ID-12

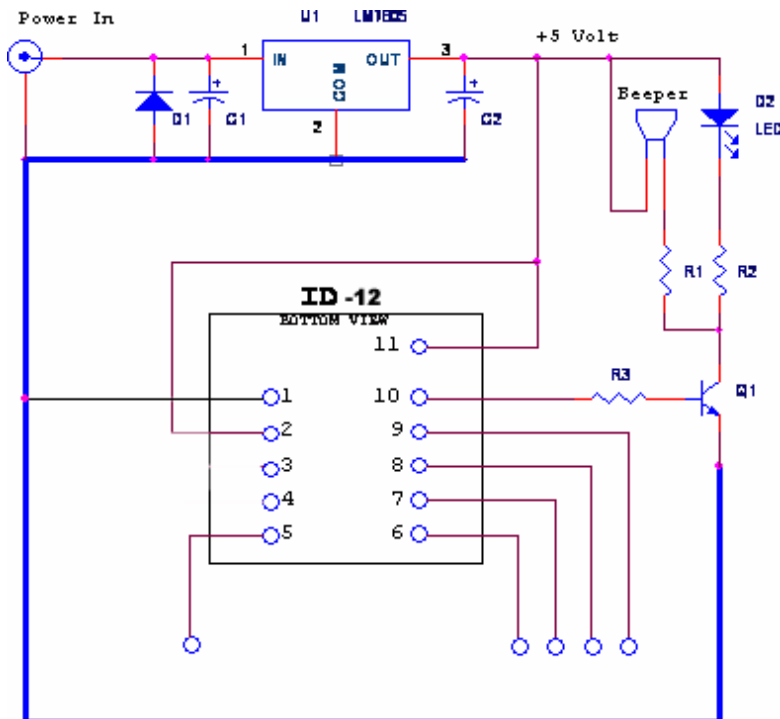

COMPONENT LIST

- R1 = 100R
- R2 = 1K
- R3 = 1K
- C1 = 100uF 16V
- C2 = 100uF 10V
- Beeper = 2.7-3.5KHz 100R
- D1 = 1N4001
- D2 = GREEN LED
- U1 = LM7805
- Q1 = UTC8050 (NPN)
- ID2 = ID Innovations ID2

* Please Note the ID2 has an internal tuning capacitor of 1.5nF and this makes the total tuning capacity = 2.5nF

The 3.1Khz Beeper Logic is centered for most Beepers in range 2.7-3.5Khz

ID Innovations

Advanced Digital Reader Technology


---Better by Design

ID-2RW, ID-12RW Brief Data

The ID2-RW, ID12-RW and ID15-RW are a new series of Read/Write modules for the Temec Q5 tag. It has full functionality including password. They contain built-in algorithms to assist customers programming the popular Sokymat Unique type tag. Password protection is allowed. Control is via a host computer using a simple terminal program such as hyper terminal or Qmodem.



ID2 / ID12 / ID20 PIN-OUT



- 1 GND
- 2 RES (Reset Bar)
- 3 ANT (Antenna)
- 4 ANT (Antenna)
- 5 Future
- 6 Program LED
- 7 ASCII in
- 8 Future
- 9 ASCII Out
- 10 Read (LED / Beeper)
- 11 +5V

Operational and Physical Characteristics

| Parameters | ID-2RW | ID-12RW | ID-20RW |
|----------------------|------------------------------|------------------------|------------------------|
| Read Range | N/A (no internal antenna) | 12+ cm (Unique Format) | 15+ cm (Unique Format) |
| Dimensions | 21 mm x 19 mm x 6 mm | 26 mm x 25 mm x 7 mm | 40 mm x 40 mm x 9 mm |
| Frequency | 125 kHz | 125 kHz | 125 kHz |
| Card Format | Temec Q5555 | Temec Q5555 | Temec Q5555 |
| Read Encoding | Manchester modulus 64 | Manchester modulus 64 | Manchester modulus 64 |
| Power Requirement | 5 VDC @ 13mA nominal | 5 VDC @ 30mA nominal | 5 VDC @ 50mA nominal |
| I/O Output Current | +/-200mA PK | - | - |
| Voltage Supply Range | +4.6V through +5.4V | +4.6V through +5.4V | +4.6V through +5.4V |
| Coil Detail | L = 0.6mH - 1.5mH, Q = 15-30 | - | - |

Description


A host computer is required to send the commands to the module. A simple terminal program such as Qmodem or Hyper-terminal can be used to send commands to the module. The blocks are individually programmable. If you have ever found that the Q5 can be a bit 'Twitchy' to program this programmer module is your solution. The command interface is simple to use and easily understood. The programmer also has two types of internal reader. One of these is provided to read Sokymat 'Unique' type tag configuration.

ID Innovations Low Cost Short-Range Proximity Readers

ID-0 / ID-10 / ID-15 MK(ii) Series

Maintenance only. Consider using the ID-2, ID-12 and the ID-20 that have improved performance.

The ID Series short-range readers come in three different sizes and read ranges. Both the ID-10 and ID-15 come with internal antennas, and have read ranges of 12+ cm and 16+ cm, respectively. With an external antenna, the ID-0 Mk(ii) can deliver read ranges of up to 25 cm. All three readers support ASCII and Wiegand26 data formats.

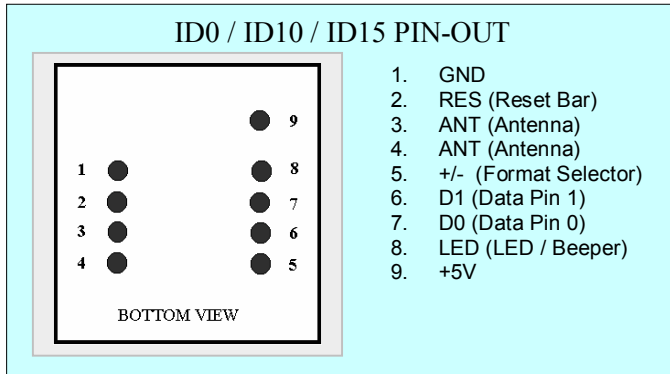

Operational and Physical Characteristics

| Parameters | ID-0 | ID-10 | ID-15 |
|----------------------|-------------------------------|-------------------------------|-------------------------------|
| Read Range | N/A (no internal antenna) | 12+ cm | 15+ cm |
| Dimensions | 21 mm x 19 mm x 6 mm | 26 mm x 25 mm x 7 mm | 40 mm x 40 mm x 9 mm |
| Frequency | 125 kHz | 125 kHz | 125 kHz |
| Card Format | EM 4001 or compatible | EM 4001 or compatible | EM 4001 or compatible |
| Encoding | Manchester 64-bit, modulus 64 | Manchester 64-bit, modulus 64 | Manchester 64-bit, modulus 64 |
| Power Requirement | 5 VDC @ 13mA nominal | 5 VDC @ 30mA nominal | 5 VDC @ 50mA nominal |
| I/O Output Current | +/-200mA PK | - | - |
| Voltage Supply Range | +4.6V through +5.4V | +4.6V through +5.4V | +4.6V through +5.4V |

Pin Description & Output Data Formats

| Pin No. | Description | ASCII | Wiegand26 |
|---------|--|---------------------|--------------|
| Pin 1 | Zero Volts and Tuning Capacitor Ground | GND 0V | GND 0V |
| Pin 2 | Strap to +5V | Reset Bar | Reset Bar |
| Pin 3 | To External Antenna and Tuning Capacitor | Antenna | Antenna |
| Pin 4 | To External Antenna | Antenna | Antenna |
| Pin 5 | Format Selector (+/-) | Strap to GND | Strap to +5V |
| Pin 6 | Data 1 | CMOS | One Output |
| Pin 7 | Data 0 | TTL Data (inverted) | Zero Output |
| Pin 8 | 3.1 kHz Logic | Beeper / LED | Beeper / LED |
| Pin 9 | DC Voltage Supply | +5V | +5V |

ID Innovations

Advanced Digital Reader Technology

---Better by Design

Customer enquiry: help@id-innovations.com

DATA FORMATS

Output Data Structure – ASCII

| | | | | | |
|-----------|-----------------|---------------------|----|----|-----------|
| STX (02h) | DATA (10 ASCII) | CHECK SUM (2 ASCII) | CR | LF | ETX (03h) |
|-----------|-----------------|---------------------|----|----|-----------|

[The 1byte (2 ASCII characters) Check sum is the “Exclusive OR” of the 5 hex bytes (10 ASCII) Data characters.]

Output Data Structure – Wiegand26

| | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------------|---|---|---|---|---|---|---|---|----|----|----|----|----------------|----|----|----|----|----|----|----|----|----|----|----|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 |
| P | E | E | E | E | E | E | E | E | E | E | E | E | O | O | O | O | O | O | O | O | O | O | O | O | P |
| Even parity (E) | | | | | | | | | | | | | Odd parity (O) | | | | | | | | | | | | |



P = Parity start bit and stop bit

Output Data Magnetic ABA Track2

| | | | | | |
|------------------|----|------|----|-----|-----------------|
| 10 Leading Zeros | SS | Data | ES | LCR | 10 Ending Zeros |
|------------------|----|------|----|-----|-----------------|

[SS is the Start Character of 11010, ES is the end character of 11111, LRC is the Longitudinal Redundancy Check.]

Dimensions (Top View) (mm)

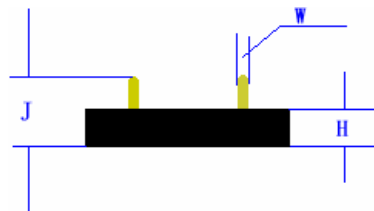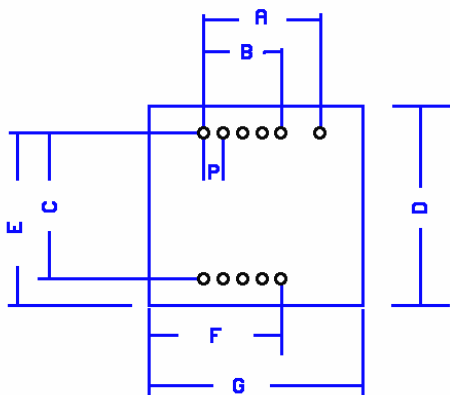

| | ID-0/ID-2 | | | ID-10/ID-12 | | | ID-15/ID-20 | | |
|---|-----------|------|------|-------------|------|------|-------------|------|------|
| | Nom. | Min. | Max. | Nom. | Min. | Max. | Nom. | Min. | Max. |
| A | 12.0 | 11.6 | 12.4 | 12.0 | 11.6 | 12.4 | 12.0 | 11.6 | 12.4 |
| B | 8.0 | 7.6 | 8.4 | 8.0 | 7.6 | 8.4 | 8.0 | 7.6 | 8.4 |
| C | 15.0 | 14.6 | 15.4 | 15.0 | 14.6 | 15.4 | 15.0 | 14.6 | 15.4 |
| D | 20.5 | 20.0 | 21.5 | 25.3 | 24.9 | 25.9 | 40.3 | 40.0 | 41.0 |
| E | 18.5 | 18.0 | 19.2 | 20.3 | 19.8 | 20.9 | 27.8 | 27.5 | 28.5 |
| F | 14.0 | 13.0 | 14.8 | 16.3 | 15.8 | 16.9 | 22.2 | 21.9 | 23.1 |
| G | 22.0 | 21.6 | 22.4 | 26.4 | 26.1 | 27.1 | 38.5 | 38.2 | 39.2 |
| P | 2.0 | 1.8 | 2.2 | 2.0 | 1.8 | 2.2 | 2.0 | 1.8 | 2.2 |
| H | 5.92 | 5.85 | 6.6 | 6.0 | 5.8 | 6.6 | 6.8 | 6.7 | 7.0 |
| J | 9.85 | 9.0 | 10.5 | 9.9 | 9.40 | 10.5 | 9.85 | 9.4 | 10.6 |
| W | 0.66 | 0.62 | 0.67 | 0.66 | 0.62 | 0.67 | 0.66 | 0.62 | 0.67 |

Note – measurements do not include any burring of edges.

NOTICE - Innovated Devices reserve the right to change these specifications without prior notice.

ID Innovations

Advanced Digital Reader Technology

----Better by Design