




**HESTORE.HU**

elektronikai alkatrész áruház

**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

Film, Film/Foil Polypropylene, Motor Run, C276, 4 uF, 5%, 470 V

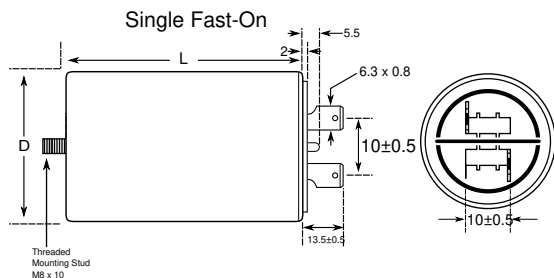

**General Information**

|                     |   |
|---------------------|---|
| <b>Dielectric:</b>  | Film/Foil Polypropylene                                     |
| <b>Style:</b>       | Can   |
| <b>Series:</b>      | C276  |
| <b>Description:</b> | Plastic Case and Cover, Ultra Sonically Welded Seal         |
| <b>Features:</b>    | Ultra Sonically Welded Seal, Safety Class P0, UL_94 V0 Disk |
| <b>RoHS:</b>        | Yes   |
| <b>Lead:</b>        | Fast On (1+1)   |
| <b>Approvals:</b>   | UL, VDE, UL (Construction Only), UL_94 V0 Disk              |

**Dimensions**

|          |             |
|----------|-------------|
| <b>D</b> | 25mm +1mm   |
| <b>L</b> | 58mm +/-2mm |

**Packaging Specifications**

|                   |              |
|-------------------|--------------|
| <b>Mounting:</b>  | Bolt - M8x10 |
| <b>Packaging:</b> | Bulk         |

**Specifications**

|                               |          |
|-------------------------------|----------|
| <b>Capacitance:</b>           | 4 uF     |
| <b>Capacitance Tolerance:</b> | 5%       |
| <b>Voltage AC:</b>            | 470 VAC  |
| <b>Temperature Range:</b>     | -25/+85C |
| <b>Rated Temperature:</b>     | 85C      |
| <b>Max dVdt:</b>              | 15 V     |