
EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

P16E.pdf
Dec.25,2015

muRata
INNOVATOR IN ELECTRONICS

Ceramic Resonators (CERALOCK®)

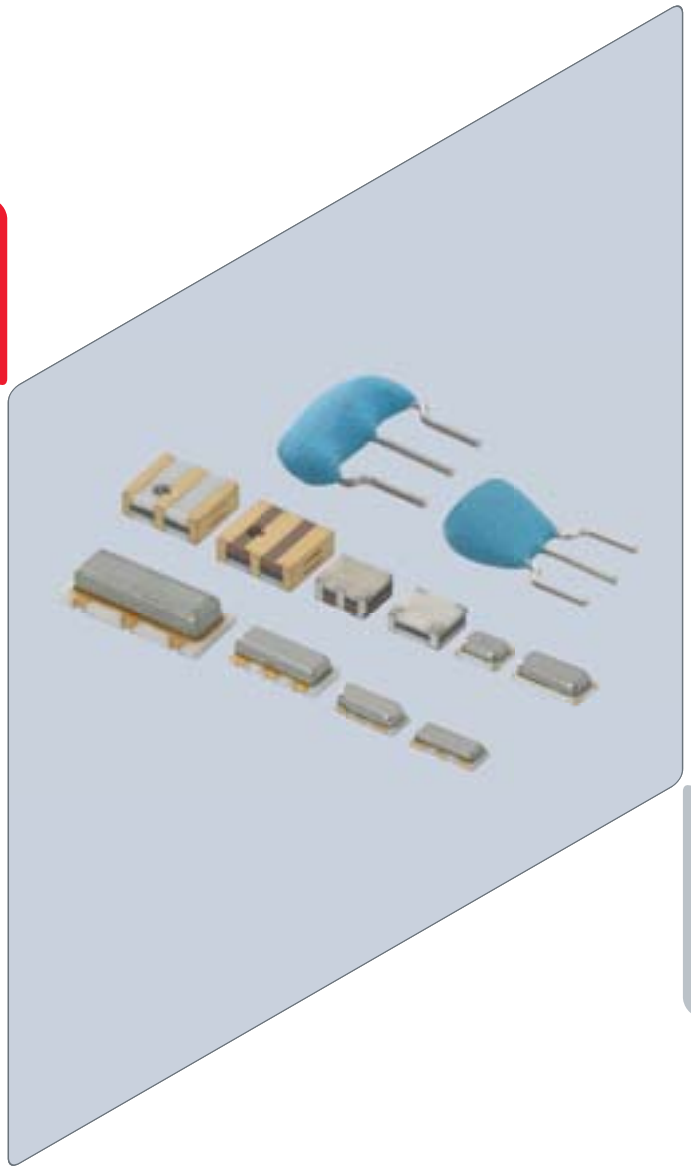

EU RoHS Compliant

- All the products in this catalog comply with EU RoHS.
- EU RoHS is "the European Directive 2011/65/EU on the Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment."
- For more details, please refer to our website 'Murata's Approach for EU RoHS' (http://www.murata.com/en-eu/support/compliance/rohs).

Contents

Product specifications are as of December 2015.

CERALOCK®, CERALOCK(R) and "CERALOCK"
in this catalog are the trademarks of
Murata Manufacturing Co., Ltd.

Selection Guide ····· p2
Part Numbering ····· p3

1 MHz Chip Type -Tight Frequency Tolerance for Automotive- ····· p4
Application Circuits Utilization ····· p6

2 MHz Chip Type -Standard Frequency Tolerance for Automotive- ····· p7
Application Circuits Utilization ····· p11

Notice for Automotive ····· p12
Packaging for Automotive ····· p17

3 MHz Chip Type -Tight Frequency Tolerance for Consumer/Industrial Usage- ····· p19
Application Circuits Utilization ····· p22


4 MHz Chip Type -Standard Frequency Tolerance for Consumer/Industrial Usage- ····· p23
Application Circuits Utilization ····· p27

5 MHz Lead Type -Standard Frequency Tolerance for Consumer/Industrial Usage- ····· p29
Application Circuits Utilization ····· p31

Notice for Consumer/Industrial Usage
MHz Chip Type ····· p32
MHz Lead Type ····· p37
Packaging for Consumer/Industrial Usage
MHz Chip Type ····· p38
MHz Lead Type ····· p40

Please check the MURATA website (**http://www.murata.com/**) if you cannot find the part number in the catalog.

Selection Guide

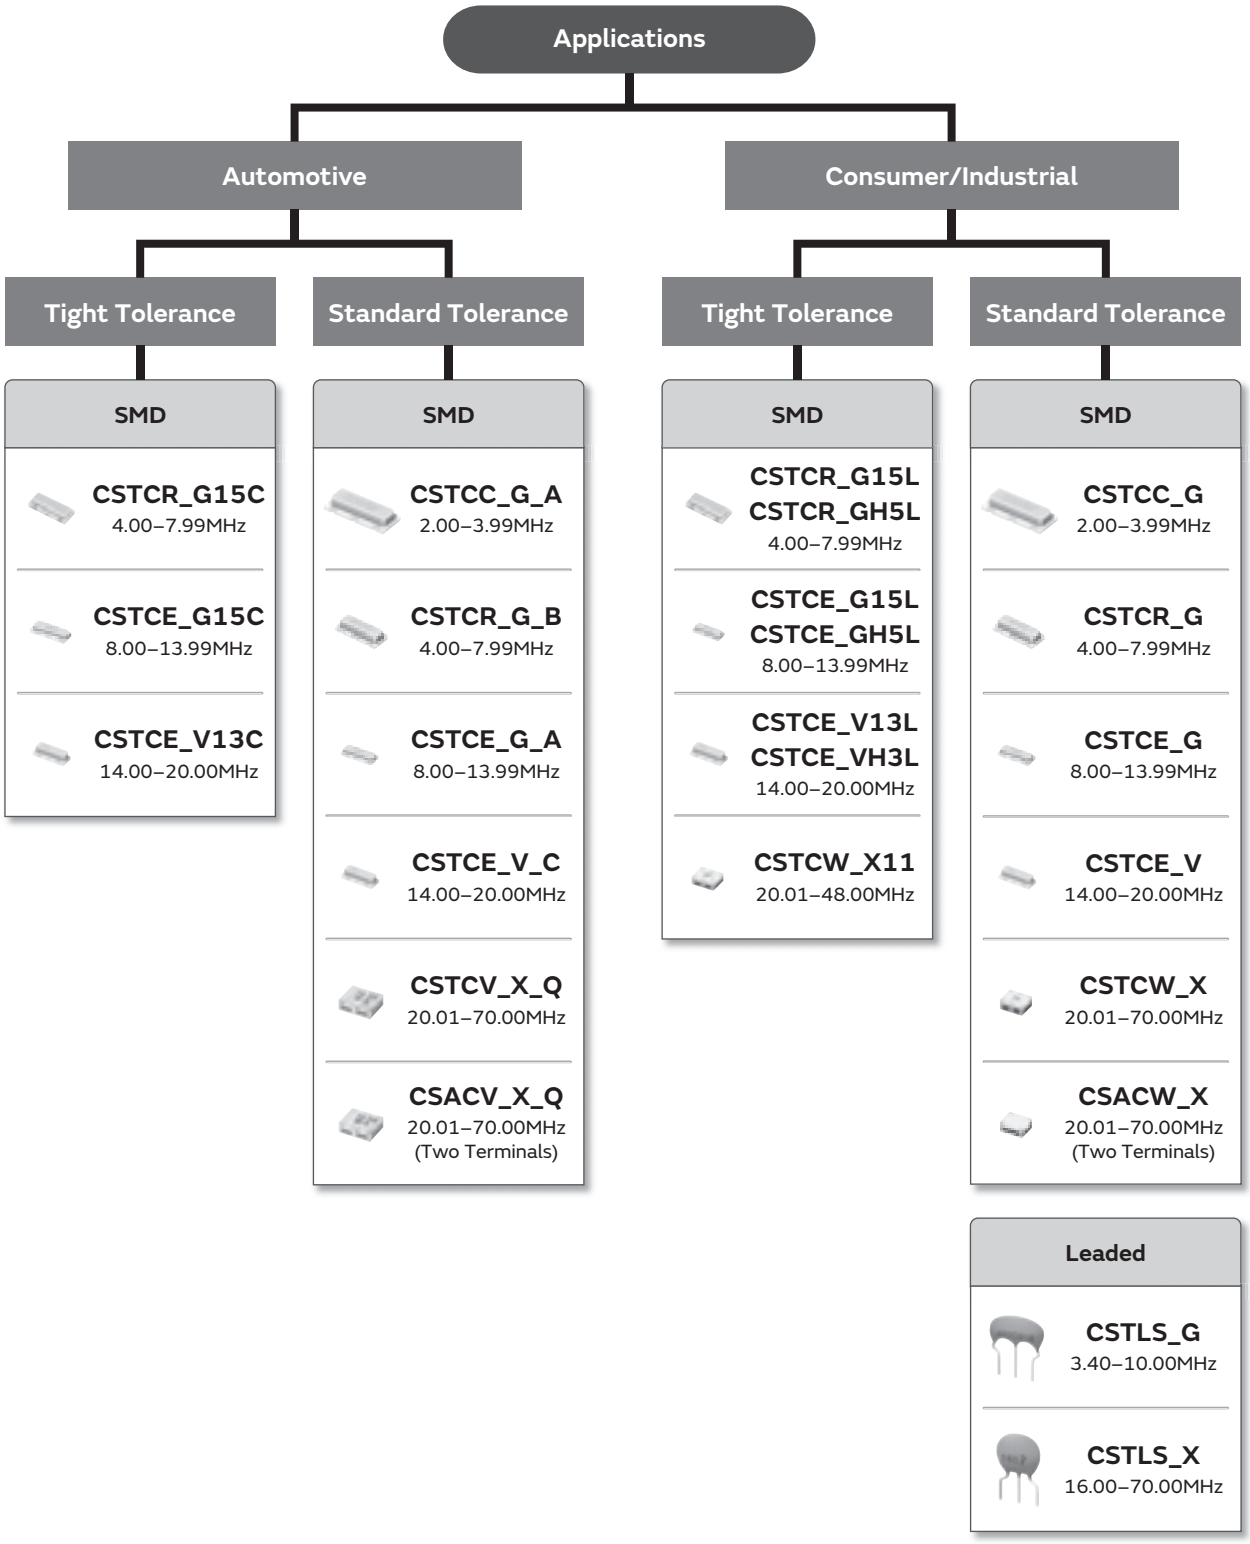

Notice: "CERALOCK® for consumer" and "CERALOCK® for automotive" is different in the specification of Operating Temperature Range, Environmental Characteristics, Physical Characteristics and so on. Please choose either "for consumer" or "for automotive" according to the required specification.

Part Numbering

CERALOCK® (MHz)

(Part Number) CS ❶ | T ❷ | CE ❸ | 16M0 ❹ | V ❺ | 5 ❻ | 3 ❼ | *** ❽ | -R0 ❾

❶Product ID

Product ID	
CS	Ceramic Resonators

❷Frequency/Capacitance

Code	Frequency/Capacitance
A	MHz with No Capacitance Built-in
T	MHz with Built-in Capacitance

❸Structure/Size

Code	Structure/Size
LS	Round Lead Type
CC	Cap Chip Type
CR/CE	Small-cap Chip Type
CV	Monolithic Chip Type
CW	Small Monolithic Chip Type

❹Nominal Center Frequency

Expressed by four-digit alphanumerics. The unit is in hertz (Hz).
Decimal point is expressed by capital letter "**M**."

❺Design

Code	Design
G	Thickness Shear mode
T/V	Thickness Expander mode
X	Thickness Expander mode (3rd overtone)

❻Initial Frequency Tolerance

Code	Initial Frequency Tolerance
5	±0.5%
3	±0.3%
2	±0.2%
1	±0.1%
H	±0.07%

❼Load Capacity

Code	Load Capacity
1	5/6pF
2	10pF
3	15pF
4	22pF
5	30/33/39pF
6	47pF

❽Individual Specification

Code	Individual Specification
***	Three-digit alphanumerics express "Individual Specification."

With standard products, "❽Individual Specification" and "❾Packaging" is omitted.

❾Packaging

Code	Packaging
-B0	Bulk
-A0	Radial Taping H_0=18mm
-R0/*R0	Plastic Taping ø=180mm Reel
-R1	Plastic Taping ø=330mm Reel

▪ Radial taping is applied to lead type and plastic taping to chip type.

Ceramic Resonators (CERALOCK®)

MHz Chip Type -Tight Frequency Tolerance for Automotive-

Chip type CERALOCK® with built-in load capacitors provides high accuracy in an extremely small package. MURATA's frequency adjustment and package technology expertise has enabled the development of the chip CERALOCK® with built-in load capacitors.
This diverse series owes its development to MURATA's original mass production techniques and high reliability, and has achieved importance in the worldwide automotive market.

Features


1. The series are high accuracy resonators whose total tolerance is available for less than ±3,000ppm.
2. The series has high reliability and is available for a wide temperature range.
3. Oscillation circuits do not require external load capacitors.
4. The series is available for a wide frequency range.
5. The resonators are extremely small and have a low profile.
6. No adjustment is necessary for oscillation circuits.

Applications

1. Cluster panel and Control panel
2. Safety control
   (Anti-lock Brake System, Electronic Stability Control, Airbag, etc.)
3. Engine ECU, Electronic Power Steering, Immobilizer, etc.
4. Car Air conditioner, Power Window, Remote Keyless Entry system, etc.
5. Intelligent Transportation System
   (Lane Keeping System, Millimeter wave radar, etc.)
6. Battery control for hybrid cars




CSTCR_G15C
4.00-7.99MHz

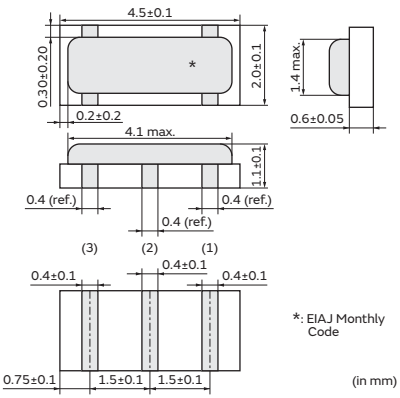




CSTCE_G15C
8.00-13.99MHz

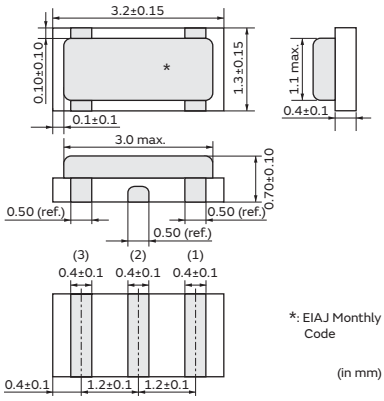




CSTCE_V13C
14.00-20.00MHz

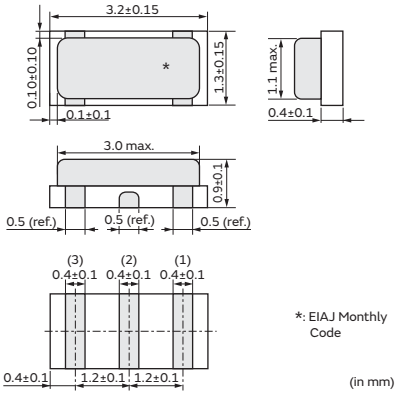

Part Number	Frequency (MHz)	Initial Frequency Tolerance (%)	Frequency Shift by Temperature (%)	Operating Temperature Range (°C)
CSTCR_G15C	4.00 to 7.99	±0.1	±0.13	-40 to 125
CSTCE_G15C	8.00 to 13.99	±0.1	±0.13	-40 to 125
CSTCE_V13C	14.00 to 20.00	±0.1	±0.13	-40 to 125


Irregular or stopped oscillation may occur under unmatched circuit conditions. Please check the actual conditions prior to use.

Measuring Circuit of Oscillating Frequency

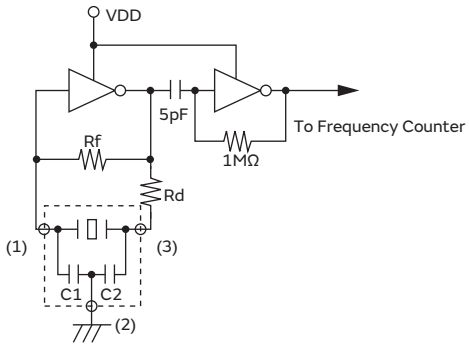


Standard Land Pattern Dimensions

CSTCR_G15C
(* This Land Pattern is not common to CSTCR_G.)

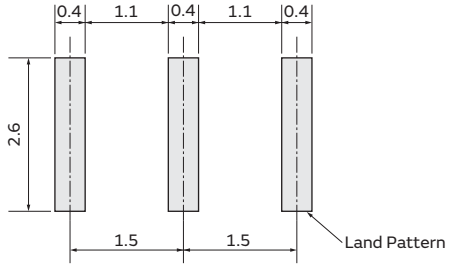


(in mm)

CSTCE_G15C

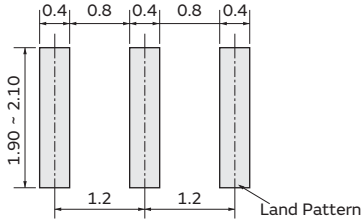

(in mm)


CSTCE_V13C
(* This Land Pattern is not common to CSTCE_V.)

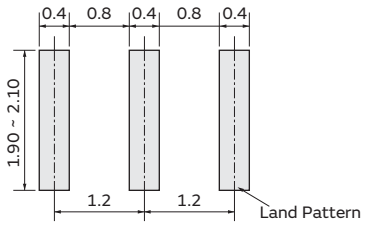


(in mm)

Frequency Temperature Characteristics


CSTCR_G15C

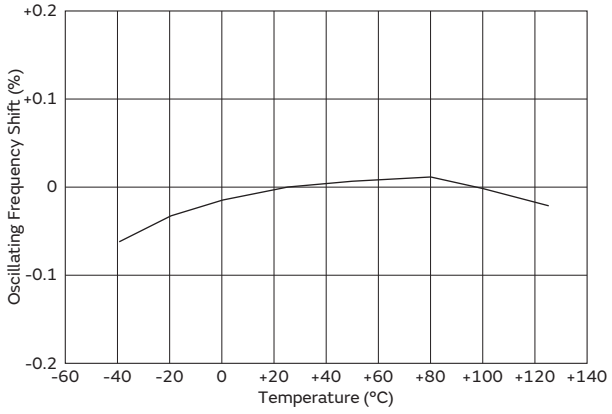

CSTCE_G15C

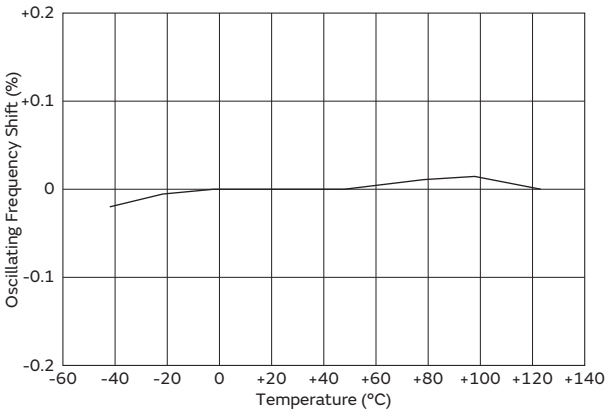


CSTCE_V13C

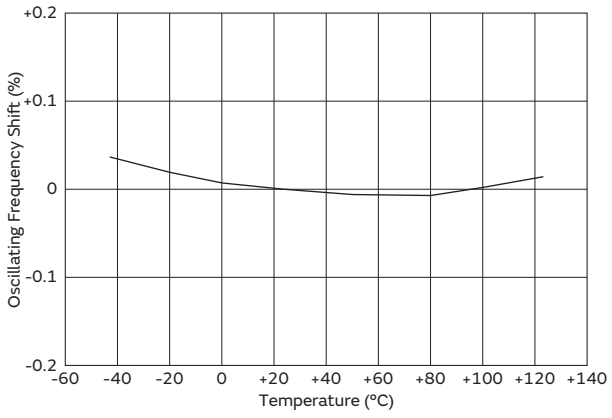

Application Circuits Utilization

TMP92CD54IF (Toshiba)

16-bit Microcomputer

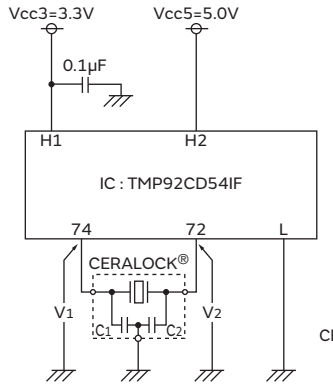


H1: 36, 68, 86
H2: 2, 4, 15, 40, 50, 61, 75
L: 1, 3, 13, 38, 51, 63, 73, 88

CERALOCK®: CSTCE10M0G15C□□-R0
C1=33pF (Typ.)
C2=33pF (Typ.)

MB90F387 (Fujitsu)

16-bit Microcomputer

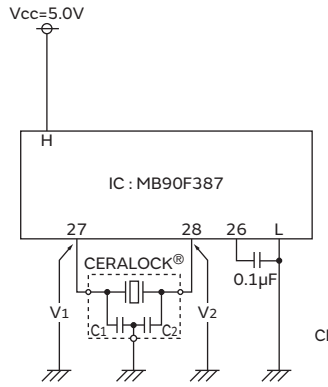


H: 1, 2, 21, 22, 24
L: 20, 23, 25, 48

CERALOCK®: CSTCE8M00G15C□□-R0
C1=33pF (Typ.)
C2=33pF (Typ.)

MC68HC908AZ60AVFU (Freescale)


8-bit Microcomputer

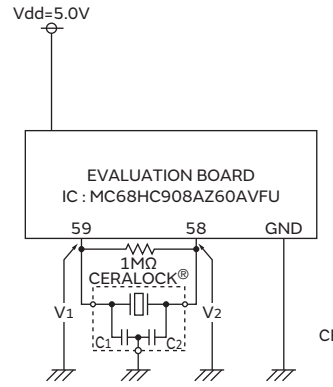

CERALOCK®: CSTCE16M0V13C□□-R0
C1=15pF (Typ.)
C2=15pF (Typ.)

ST72F561 (HS) (ST Microelectronics)

8-bit Microcomputer

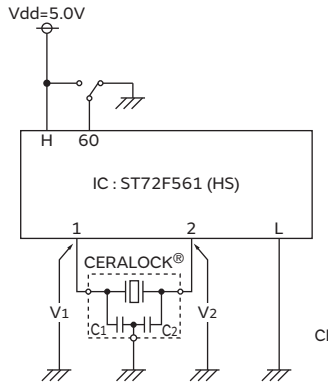


H: 9, 25, 41, 57, 58
L: 8, 24, 40, 55, 56

CERALOCK®: CSTCE8M00G15A□□-R0
C1=33pF (Typ.)
C2=33pF (Typ.)

μPD70F3283YGC (Renesas)

32-bit Microcomputer

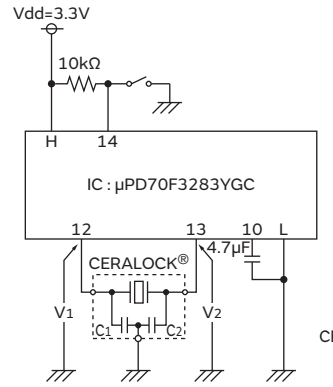


H: 1, 5, 9, 34, 70
L: 2, 8, 11, 15, 33, 69

CERALOCK®: CSTCE10M0G15C□□-R0
C1=33pF (Typ.)
C2=33pF (Typ.)

M30842MCT-XXXGP (Renesas)

16-bit Microcomputer

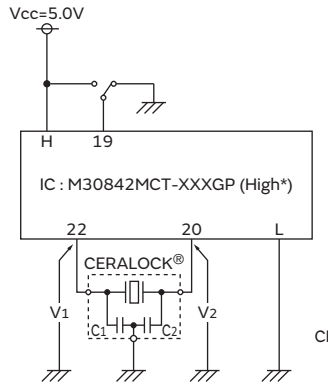

H: 23, 24, 37, 39, 59, 74, 91, 118, 122, 132, 142, 143
L: 15, 16, 21, 36, 41, 57, 76, 93, 110~113, 120, 121, 130, 140
*High: XIN-XOUT Drive Capacity Select Bit

CERALOCK®: CSTCE8M00G15C□□-R0
C1=33pF (Typ.)
C2=33pF (Typ.)

Ceramic Resonators (CERALOCK®)

MHz Chip Type -Standard Frequency Tolerance for Automotive-

Chip type CERALOCK® with built-in load capacitors provides high accuracy in an extremely small package. MURATA's frequency adjustment and package technology expertise has enabled the development of the chip CERALOCK® with built-in load capacitors.
This diverse series owes its development to MURATA's original mass production techniques and high reliability, and has achieved importance in the worldwide automotive market.

Features


1. The series has high reliability and is available for a wide temperature range.
2. Oscillation circuits do not require external load capacitors.
3. The series is available in a wide frequency range.
4. The resonators are extremely small and have a low profile.
5. No adjustment is necessary for oscillation circuits.

Applications

1. Cluster panel and Control panel
2. Safety control
   (Anti-lock Brake System, Electronic Stability Control, Airbag, etc.)
3. Engine ECU, Electronic Power Steering, Immobilizer, etc.
4. Car Air conditioner, Power Window, Remote Keyless Entry system, etc.
5. Electronic Toll Collection system, Car Navigation, etc.




CSTCC_G_A
2.00-3.99MHz

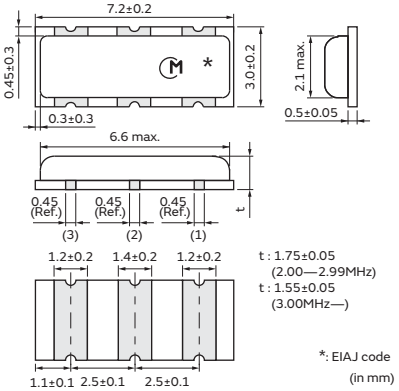




CSTCR_G_B
4.00-7.99MHz

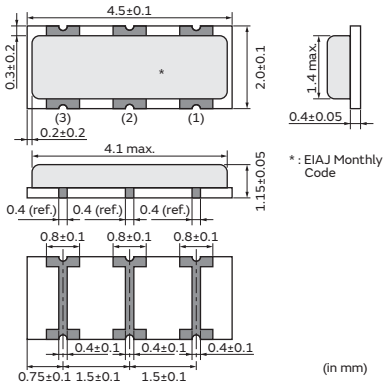




CSTCE_G_A
8.00-13.99MHz

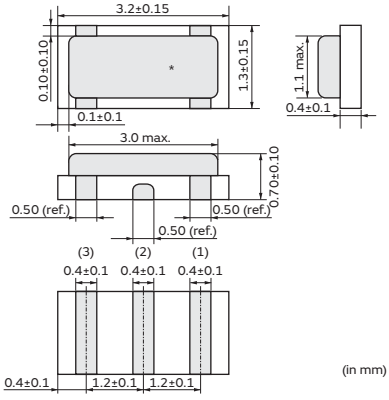



CSTCE_V_C
14.00-20.00MHz

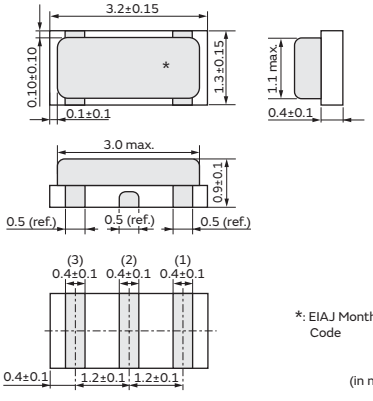


Continued on the following page. ↗

Continued from the preceding page. ↘



CSACV_X_Q
20.01-70.00MHz

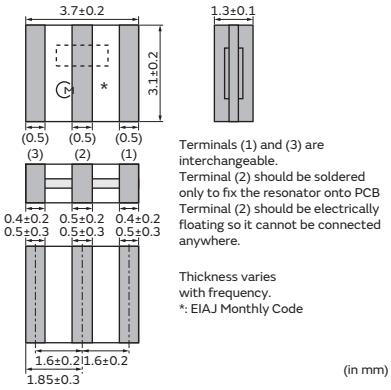


Terminals (1) and (3) are interchangeable.
Terminal (2) should be soldered only to fix the resonator onto PCB
Terminal (2) should be electrically floating so it cannot be connected anywhere.

Thickness varies with frequency.
*: EIAJ Monthly Code

(in mm)



CSTCV_X_Q
20.01-70.00MHz

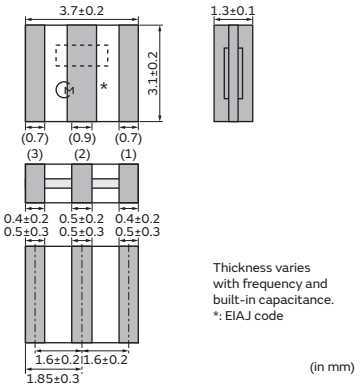

Thickness varies with frequency and built-in capacitance.
*: EIAJ code


(in mm)

Part Number	Frequency (MHz)	Initial Frequency Tolerance (%)	Frequency Shift by Temperature (%)	Operating Temperature Range (°C)
CSTCC_G_A	2.00 to 3.99	±0.5	±0.4 [-0.6% to +0.3%:Built-in Capacitance 47pF type within Freq.2.00 to 3.49MHz]	-40 to 125
CSTCR_G_B	4.00 to 7.99	±0.5	±0.15	-40 to 125
CSTCE_G_A	8.00 to 13.99	±0.5	±0.2	-40 to 125
CSTCE_V_C	14.00 to 20.00	±0.5	±0.15	-40 to 125
CSACV_X_Q	20.01 to 70.00	±0.5	±0.3	-40 to 125
CSTCV_X_Q	20.01 to 70.00	±0.5	±0.3	-40 to 125


Irregular or stopped oscillation may occur under unmatched circuit conditions. Please check the actual conditions prior to use.

Measuring Circuit of Oscillating Frequency


CSTCC_G_A

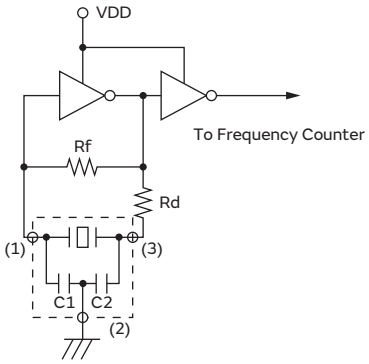

CSTCE_G_A/CSTCE_V_C/CSTCR_G_B/CSTCV_X_Q

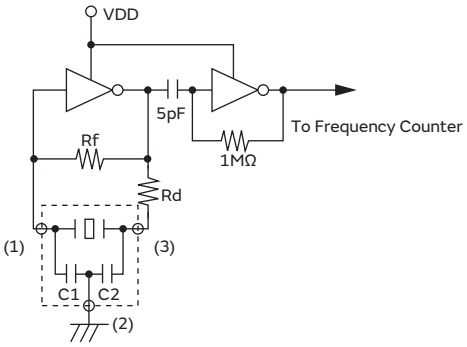


CSACV_X_Q

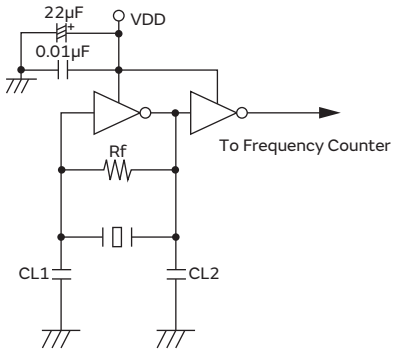


Standard Land Pattern Dimensions

CSTCC_G_A




(in mm)

CSTCR_G_B




(in mm)

CSTCE_G_A

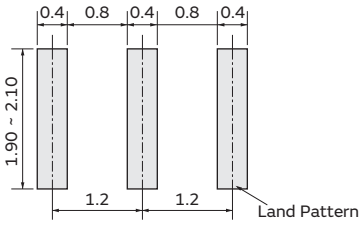


(in mm)

CSTCE_V_C
(* This Land Pattern is not common to CSTCE_V.)

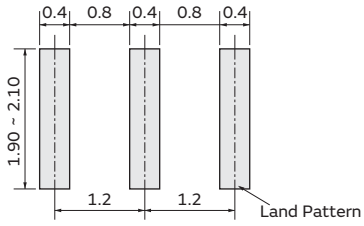


(in mm)

CSTCV_X_Q



(in mm)


CSACV_X_Q




(in mm)

Frequency Temperature Characteristics


CSTCC_G_A

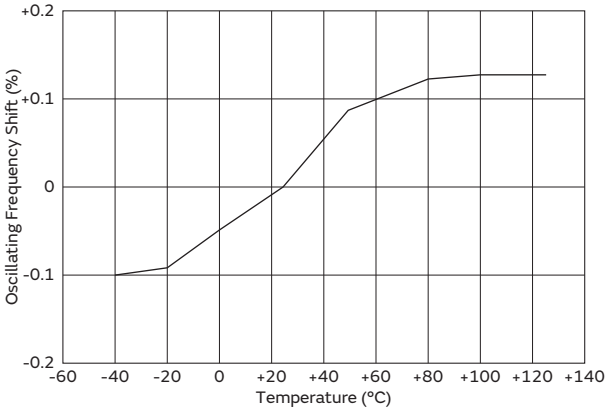


CSTCR_G_B

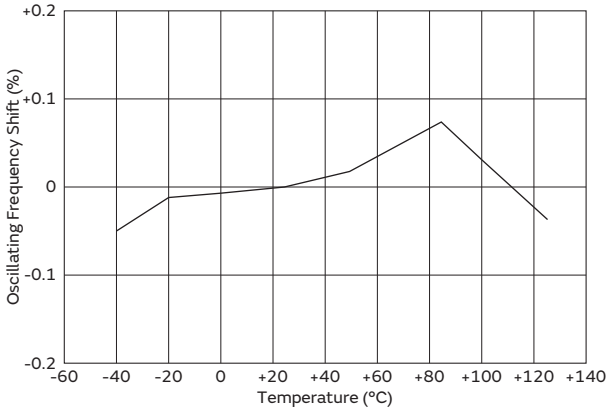


CSTCE_G_A

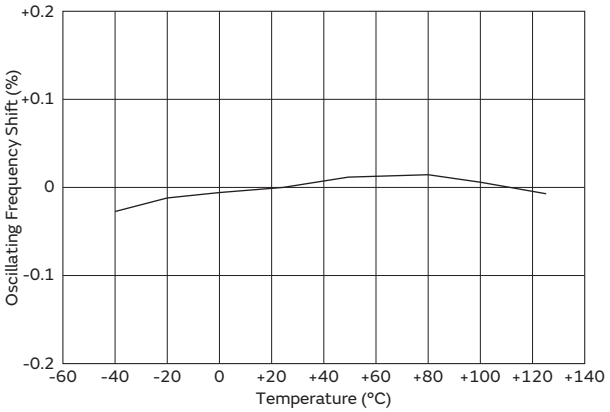


CSTCE_V_C

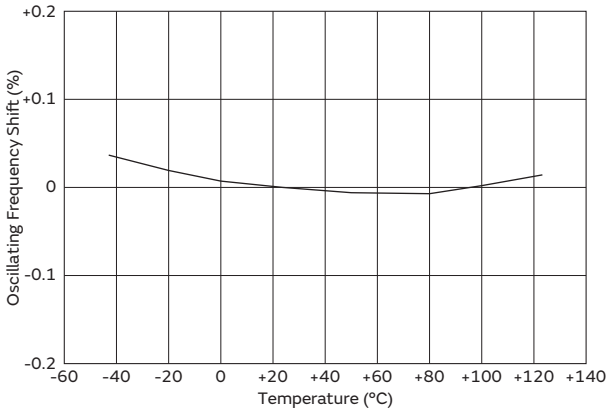

CSTCV_X_Q

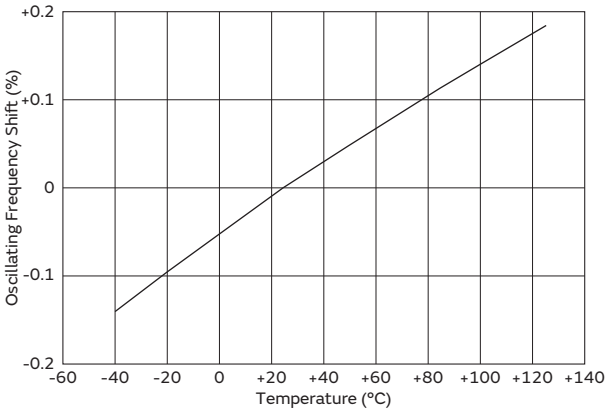


CSACV_X_Q

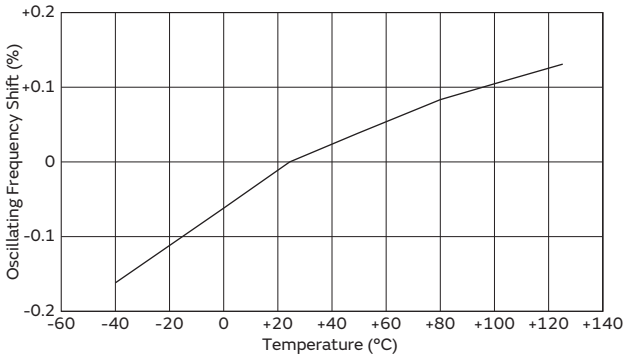

Application Circuits Utilization

μPD78F9222MC-5A4 (Renesas)

8-bit Microcomputer

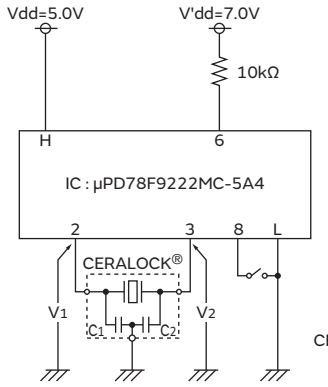


H: 5, 20
L: 1

CERALOCK®: CSTCR6M00G55B-R0
C1=39pF (Typ.)
C2=39pF (Typ.)

M30260F8AGP (Renesas)

16-bit Microcomputer

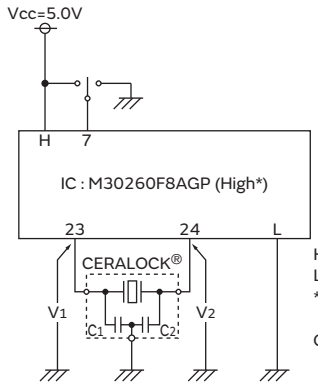


H: 11, 46, 47, 48
L: 4, 9, 44
*High: XIN-XOUT Drive Capacity Select Bit

CERALOCK®: CSTCE10M0G55A-R0
C1=33pF (Typ.)
C2=33pF (Typ.)

MB90F347D (Fujitsu)

16-bit Microcomputer

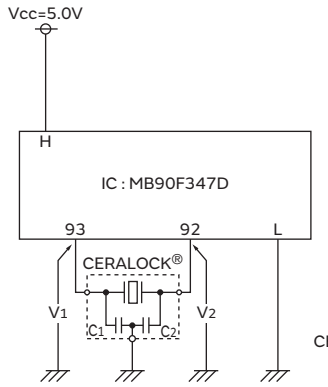


H: 15, 32, 65, 90
L: 16, 35, 44, 66, 91

CERALOCK®: CSTCE8M00G55A-R0
C1=33pF (Typ.)
C2=33pF (Typ.)

MC68HC908AZ60AVFU (Freescale)


8-bit Microcomputer

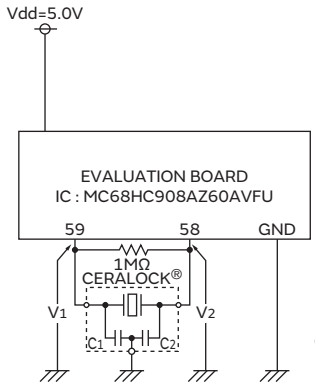

CERALOCK®: CSTCE16M0V53C-R0
C1=15pF (Typ.)
C2=15pF (Typ.)

ST72F324J6T3 (MS) (ST Microelectronics)

8-bit Microcomputer

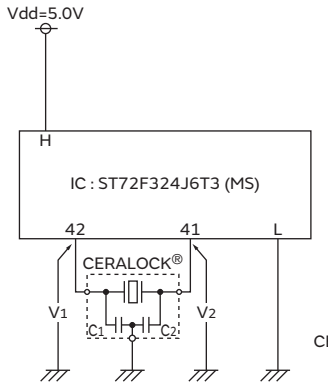


H: 13, 21, 32, 43
L: 14, 22, 33, 39, 40

CERALOCK®: CSTCR4M00G55B-R0
C1=39pF (Typ.)
C2=39pF (Typ.)

PIC12F675-I/P (HS) (Microchip)

8-bit Microcomputer

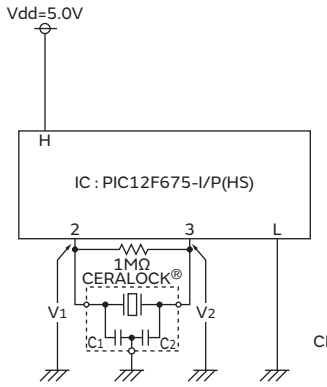

H: 1
L: 4, 8

CERALOCK®: CSTCE8M00G52A-R0
C1=10pF (Typ.)
C2=10pF (Typ.)

Notice for Automotive

Soldering and Mounting (CSTCC/CSTCR/CSTCE_V/CSTCE_G Series)

1. Soldering

(1) Reflow soldering

Please mount component on a circuit board by reflow soldering. Flow soldering is not acceptable.


Recommendable Flux and Solder

Flux	Please use rosin based flux, not water soluble flux.
Solder	Please use solder (Sn-3.0Ag-0.5Cu) under the following conditions: Standard thickness of soldering paste: 0.10 to 0.15mm.

Recommendable Soldering Profile

Pre-heating	150 to 180°C	60 to 120s
Heating	220°C min.	30 to 60s
Peak Temperature	upper limit: 260°C	1s max.
	lower limit: 245°C	5s max.

Temperature shall be measured on the surface of component.

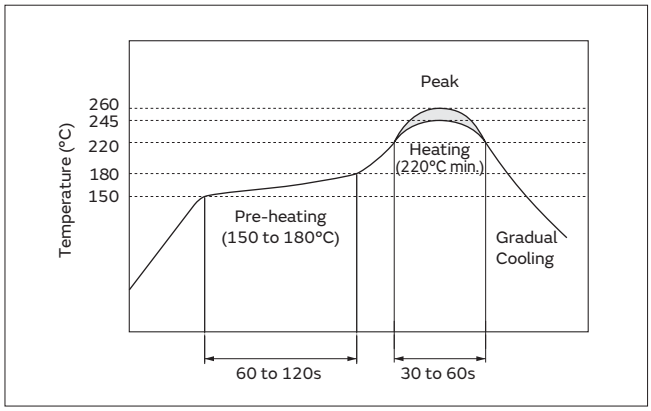

(2) Soldering with Iron

If compelled to mount the component by using soldering iron, please do not directly touch the component with the soldering iron. The component terminals or electrical characteristics may be damaged if excessive thermal stress is applied.

Recommendable Soldering with Iron

Heating of the soldering iron	350°C max.
Watt	30W max.
Shape of the soldering iron	ø3mm max.
Soldering Time	5s max. at one terminal
Solder	Sn-3.0Ag-0.5Cu

(3) Solder Volume

Please make the solder volume less than the height of the substrate to avoid damage to the seal between the metal cap and the substrate.

(4) Other

Do not reuse components removed from a circuit board after soldering.

(5) Conditions for Placement Machines

The component is recommended with placement machines that employ optical placement capabilities. The component may be damaged by excessive mechanical force. Please make sure that you have evaluated by using placement machines before going into mass production. Do not use placement machines that utilize mechanical positioning. Please contact Murata for details beforehand.

Continued on the following page.↗

Notice for Automotive

Continued from the preceding page.↘

2. Wash

(1) Cleaning Solvents
HCFC, Isopropanol, Tap water, Demineralized water, Cleanthrough750H, Pine alpha 100S, Techno care FRW

(2) Temperature Difference : dT *1
dT≦60°C (dT=Component-solvent)
*1 ex. If the component is immersed at +90°C into cleaning solvent at +60°C, then dT=30°C.

(3) Conditions
(a) Ultrasonic Wash
1 minute max. in above solvent at +60°C max.
(Frequency: 28kHz, Output: 20W/l)
(b) Immersion Wash
5 minutes max. in above solvent at +60°C max.
(c) Shower or Rinse Wash
5 minutes max. in above solvent at +60°C max.

(4) Drying
5 minutes max. by air blow at +80°C max.

(5) Other
(a) Total washing time should be within 10 minutes.
(b) The component may be damaged if it is washed with chlorine, petroleum, or alkali cleaning solvent.

3. Coating

Conformal coating of the component is acceptable. However, the resin material, curing temperature, and other process conditions should be evaluated to confirm stable electrical characteristics are maintained.

Notice for Automotive

Soldering and Mounting (CSTCV/CSACV Series)

1. Soldering

(1) Reflow soldering

Please mount component on a circuit board by reflow soldering. Flow soldering is not acceptable.


Recommendable Flux and Solder

Flux	Please use rosin based flux, not water soluble flux.
Solder	Please use solder (Sn-3.0Ag-0.5Cu) under the following conditions: Standard thickness of soldering paste: 0.10 to 0.15mm.

Recommendable Soldering Profile

Pre-heating	150 to 180°C	60 to 120s
Heating	220°C min.	30 to 60s
Peak Temperature	upper limit: 260°C	1s max.
	lower limit: 245°C	5s max.

Temperature shall be measured on the surface of component.

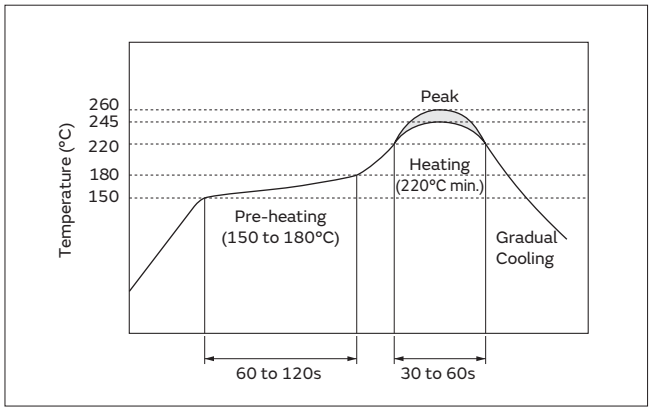

(2) Soldering with Iron

If compelled to mount the component by using soldering iron, please do not directly touch the component with the soldering iron. The component terminals or electrical characteristics may be damaged if excessive thermal stress is applied.

Recommendable Soldering with Iron

Heating of the soldering iron	350°C max.
Watt	30W max.
Shape of the soldering iron	ø3mm max.
Soldering Time	5s max. at one terminal
Solder	Sn-3.0Ag-0.5Cu

(3) Other

Do not reuse components removed from a circuit board after soldering.

(4) Conditions for Placement Machines

The component is recommended with placement machines that employ optical placement capabilities. The component may be damaged by excessive mechanical force. Please make sure that you have evaluated by using placement machines before going into mass production. Do not use placement machines that utilize mechanical positioning. Please contact Murata for details beforehand.

2. Wash

(1) Cleaning Solvents

HCFC, Isopropanol, Tap water, Demineralized water, Cleanthrough750H, Pine alpha 100S, Techno care FRW

(2) Temperature Difference : dT *1

dT≦60°C (dT=Component-solvent)

*1 ex. If the component is immersed at +90°C into cleaning solvent at +60°C, then dT=30°C.

Continued on the following page.↗

Notice for Automotive

Continued from the preceding page.↘

(3) Conditions

(a) Ultrasonic Wash
1 minute max. in above solvent at +60°C max.
(Frequency: 28kHz, Output: 20W/l)

(b) Immersion Wash
5 minutes max. in above solvent at +60°C max.

(c) Shower or Rinse Wash
5 minutes max. in above solvent at +60°C max.

(4) Drying
5 minutes max. by air blow at +80°C max.

(5) Other
(a) Total washing time should be within 10 minutes.
(b) The component may be damaged if it is washed with chlorine, petroleum, or alkali cleaning solvent.

3. Coating

Conformal coating of the component is acceptable. However, the resin material, curing temperature, and other process conditions should be evaluated to confirm stable electrical characteristics are maintained.

Notice for Automotive

Storage and Operating Conditions

1. Product Storage Conditions
Please store the products in a room where the temperature/humidity is stable, and avoid such places where there are large temperature changes.
Please store the products under the following conditions:
Temperature: -10 to +40°C
Humidity: 15 to 85% R.H.
2. Expiration Date on Storage
Expiration date (Shelf life) of the products is six months after delivery under the conditions of a sealed and unopened package. Please use the products within six months after delivery. If you store the products for a long time (more than six months), use carefully because the products may be degraded in solderability and/or rusty.
Please confirm solderability and characteristics for the products regularly.
3. Notice on Product Storage
(1) Please do not store the products in a chemical atmosphere (Acids, Alkali, Bases, Organic gas, Sulfides and so on), because the characteristics may be reduced in quality, and/or be degraded in the solderability due to the storage in a chemical atmosphere.
(2) Please do not put the products directly on the floor without anything under them to avoid damp and/or dusty places.
(3) Please do not store the products in places such as: in a damp heated place, in a place where direct sunlight comes in, in a place applying vibrations.
(4) Please use the products immediately after the package is opened, because the characteristics may be reduced in quality, and/or be degraded in the solderability due to storage under the poor conditions.
(5) Please do not drop the products to avoid cracking of ceramic elements.
4. Other
Conformal coating of the component is acceptable. However, the resin material, curing temperature, and other process conditions should be evaluated to confirm that stable electrical characteristics are maintained.
Please be sure to consult with our sales representatives or engineers whenever and prior to using the products.

Rating

The component may be damaged if excessive mechanical stress is applied.

Handling

"CERALOCK" may stop oscillating or oscillate irregularly under improper circuit conditions.


Packaging for Automotive

Minimum Quantity

Part Number	Plastic Tape ø180mm	Plastic Tape ø330mm	Bulk	Reel Dimensions
CSTCC_G_A	2,000	6,000	500	a
CSTCR_G_B	3,000	9,000	500	a
CSTCR_G15C	3,000	9,000	500	a
CSTCE_G_A	3,000	9,000	500	b
CSTCE_G15C	3,000	9,000	500	b
CSTCE_V_C	3,000	9,000	500	b
CSTCE_V13C	3,000	9,000	500	b
CSTCV_X_Q	2,000	6,000	500	a
CSACV_X_Q	2,000	6,000	500	a


The order quantity should be an integral multiple of the "Minimum Quantity" shown above. (pcs.)

Dimensions of Reel

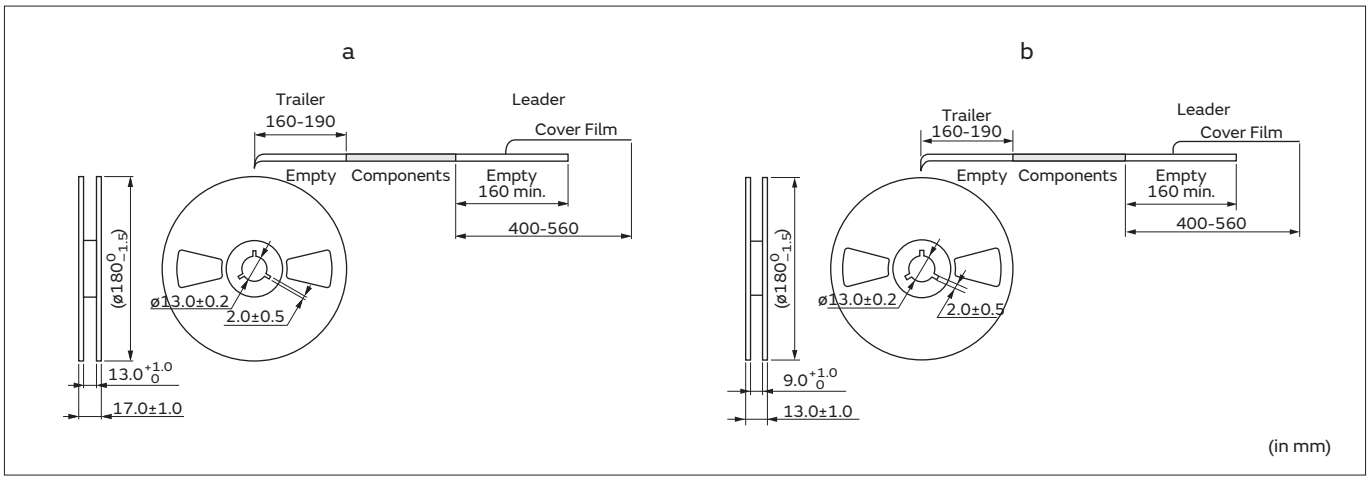


Dimensions of Taping

CSTCR_G15C

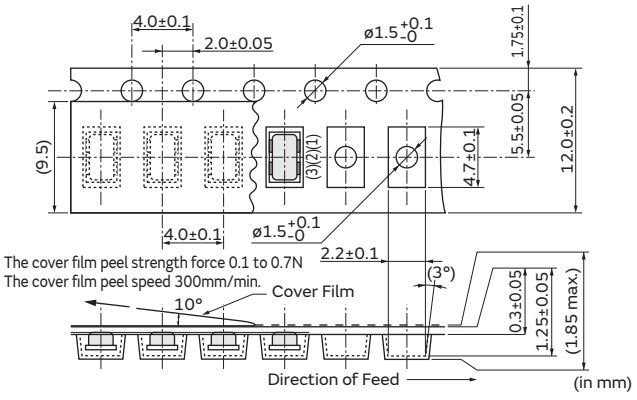

CSTCE_G15C

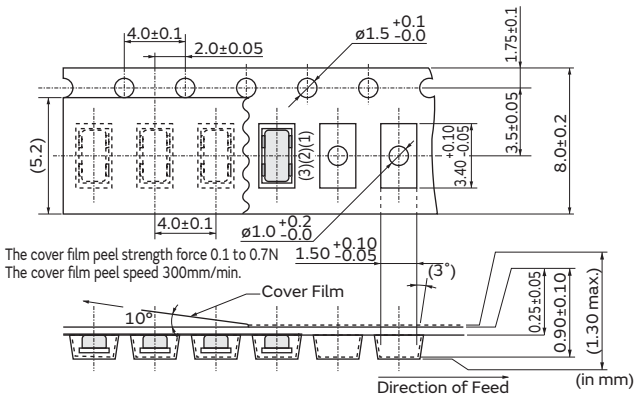


Continued on the following page. ↗

Packaging for Automotive


Continued from the preceding page.↘

Dimensions of Taping

CSTCE_V13C

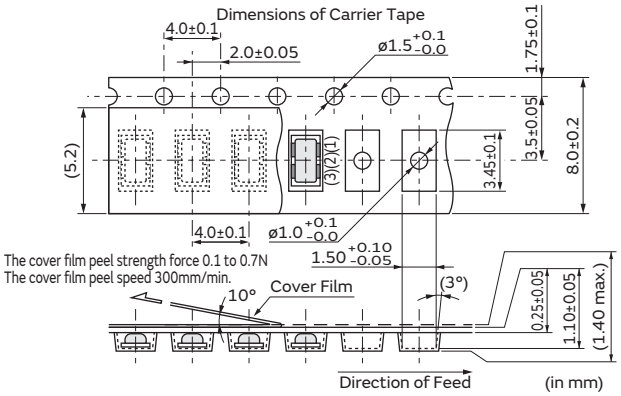

CSTCC_G_A

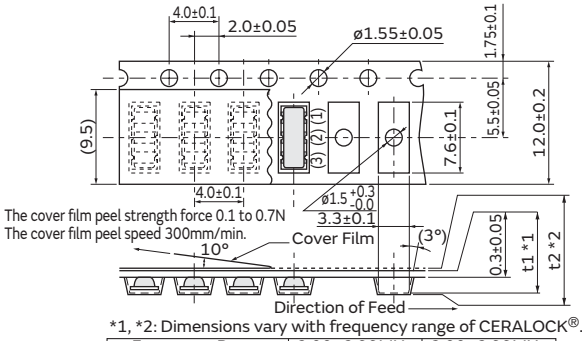


*1, *2: Dimensions vary with frequency range of CERALOCK®.


Frequency Range		2.00–2.99MHz	3.00–3.99MHz
t1	*1	1.85±0.05	1.65±0.05
t2	*2	2.45 max.	2.25 max.

(in mm)


CSTCR_G_B

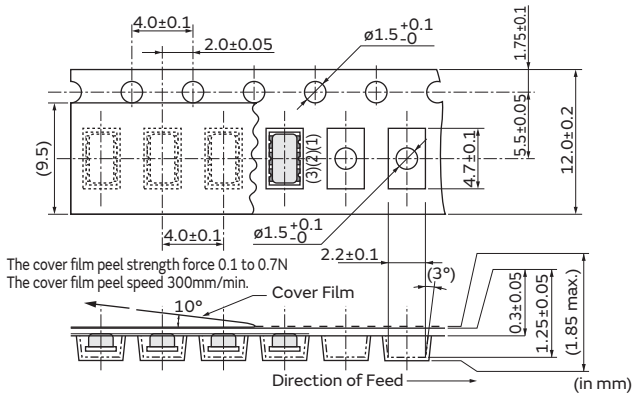


CSTCE_G_A

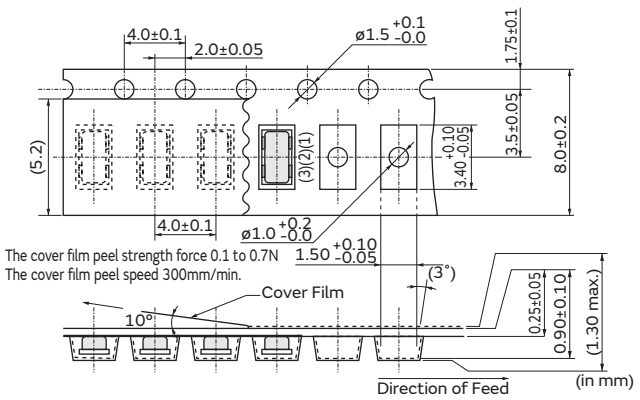

CSTCE_V_C

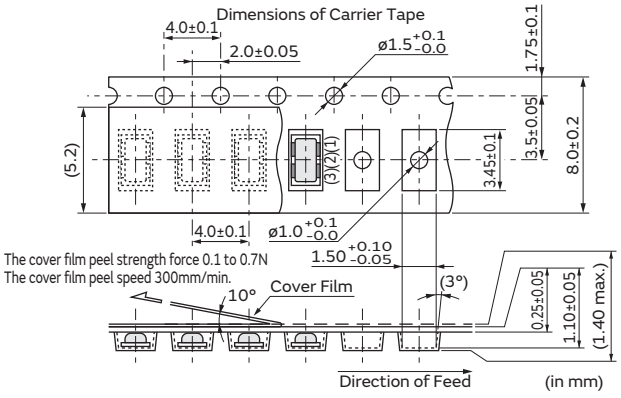

CSTCV_X_Q

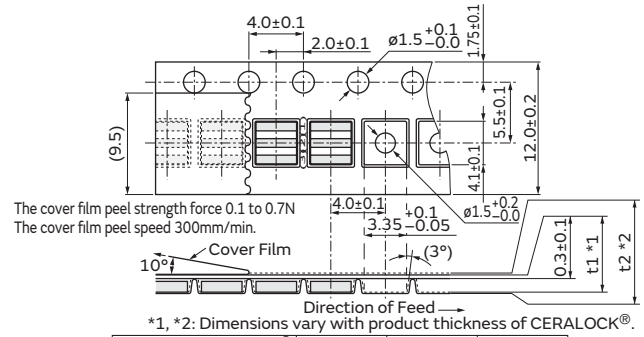


*1, *2: Dimensions vary with product thickness of CERALOCK®.

Thickness of CERALOCK®		1.50–1.40	1.30–1.20	1.10–1.00
t1	*1	1.65±0.1	1.45±0.1	1.2±0.1
t2	*2	2.0 max.	1.8 max.	1.5 max.

(in mm)

CSACV_X_Q

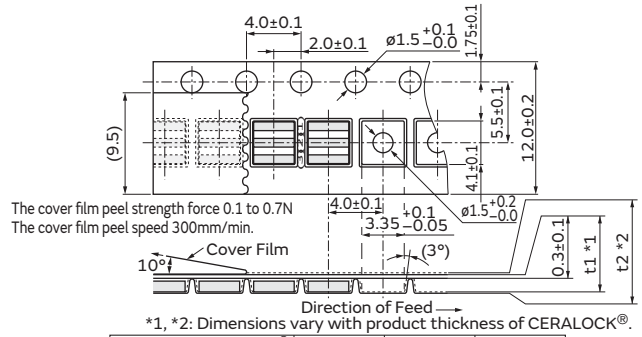

*1, *2: Dimensions vary with product thickness of CERALOCK®.

Thickness of CERALOCK®		1.50–1.40	1.30–1.20	1.10–1.00
t1	*1	1.65±0.1	1.45±0.1	1.2±0.1
t2	*2	2.0 max.	1.8 max.	1.5 max.

(in mm)

Ceramic Resonators (CERALOCK®)

MHz Chip Type -Tight Frequency Tolerance for Consumer/Industrial Usage-

Chip type CERALOCK® with built-in load capacitors provides high accuracy in an extremely small package. MURATA's frequency adjustment and packaging technology expertise has enabled the development of the chip CERALOCK® with built-in load capacitors.
High-density mounting is made possible by the small package and the elimination of the need for an external load capacitor.

Features


1. Oscillation circuits do not require external load capacitors.
2. Available in a wide frequency range.
3. Extremely small and have a low profile..
4. No adjustment is necessary for oscillation circuits.

Applications

1. Clock oscillators for USB (Full-speed) controller ICs
2. Audio equipment and musical instruments, etc.
3. Other applications for replacement of Crystal units/ Oscillators




CSTCR_G15L/CSTCR_GH5L
4.00-7.99MHz

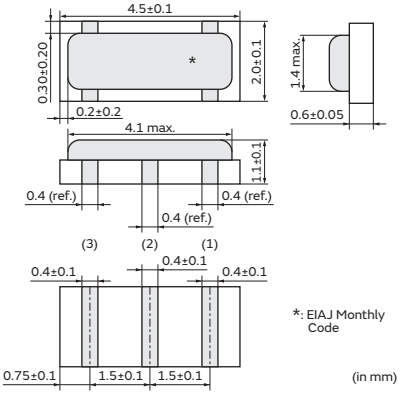




CSTCE_G15L/CSTCE_GH5L
8.00-13.99MHz

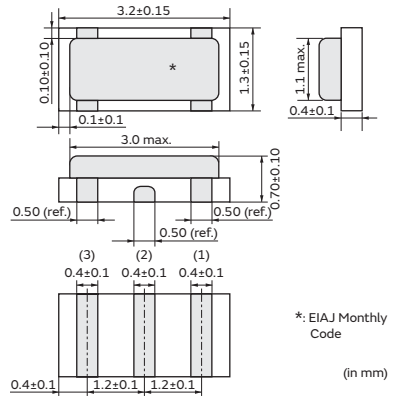




CSTCE_V13L/CSTCE_VH3L
14.00-20.00MHz

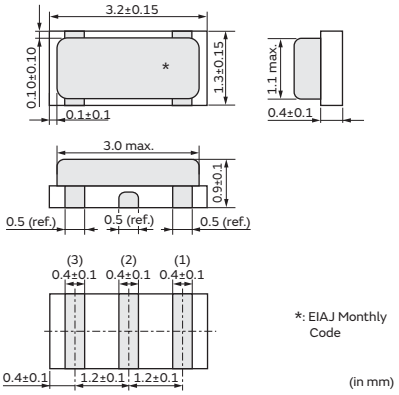



CSTCW_X11
20.01-48.00MHz

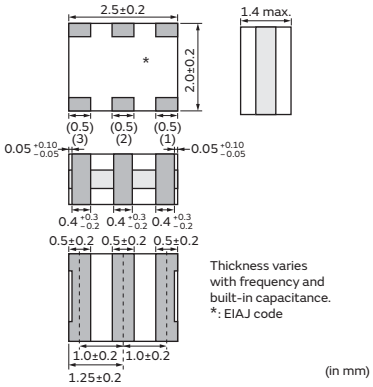


Part Number	Frequency (MHz)	Initial Frequency Tolerance (%)	Frequency Shift by Temperature (%)	Operating Temperature Range (°C)
CSTCR_G15L	4.00 to 7.99	±0.1	±0.08	0 to 70
CSTCR_GH5L	4.00 to 7.99	±0.07	±0.08	0 to 70
CSTCE_G15L	8.00 to 13.99	±0.1	±0.08	0 to 70
CSTCE_GH5L	8.00 to 13.99	±0.07	±0.08	0 to 70
CSTCE_V13L	14.00 to 20.00	±0.1	±0.08	0 to 70
CSTCE_VH3L	14.00 to 20.00	±0.07	±0.08	0 to 70
CSTCW_X11	20.01 to 48.00	±0.1	±0.1	0 to 70


Irregular or stopped oscillation may occur under unmatched circuit conditions. Please check the actual conditions prior to use.

Measuring Circuit of Oscillating Frequency

CSTCR_G15L/CSTCR_GH5L/CSTCE_G15L/ CSTCE_GH5L/CSTCE_V13L/CSTCE_VH3L

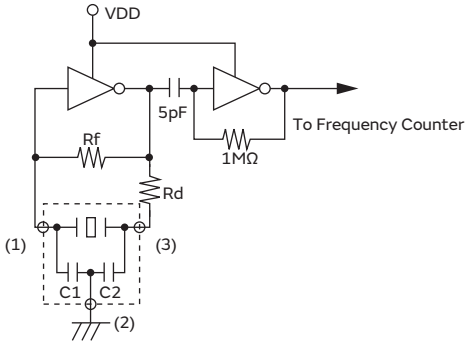


CSTCW_X11

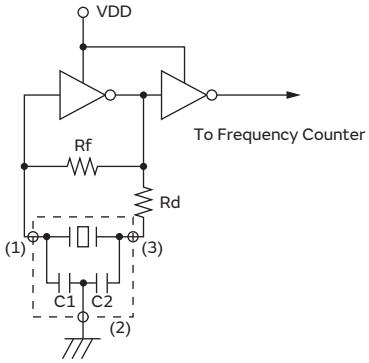


Standard Land Pattern Dimensions

CSTCR_G15L/CSTCR_GH5L
(* This Land Pattern is not common to CSTCR_G.)

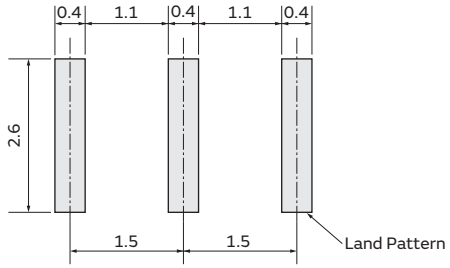


(in mm)

CSTCE_G15L/CSTCE_GH5L

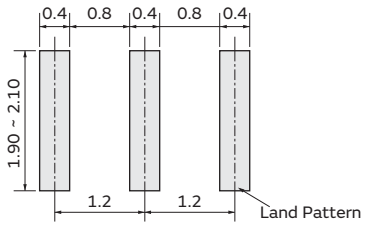


(in mm)

CSTCE_V13L/CSTCE_VH3L
(* This Land Pattern is not common to CSTCE_V.)

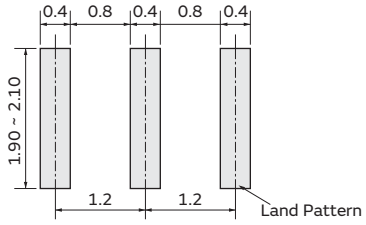

(in mm)


CSTCW_X11




(in mm)

Frequency Temperature Characteristics


CSTCR_G15L/CSTCR_GH5L

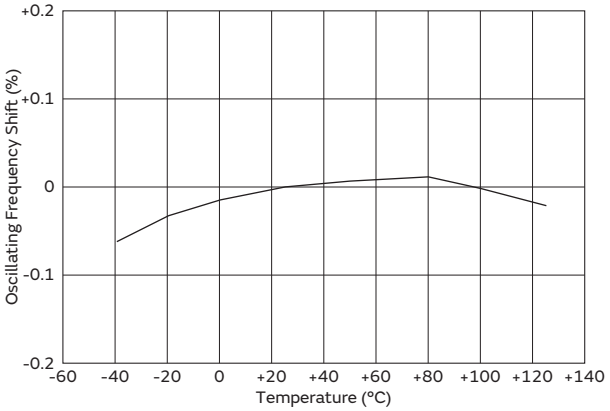


CSTCE_G15L/CSTCE_GH5L

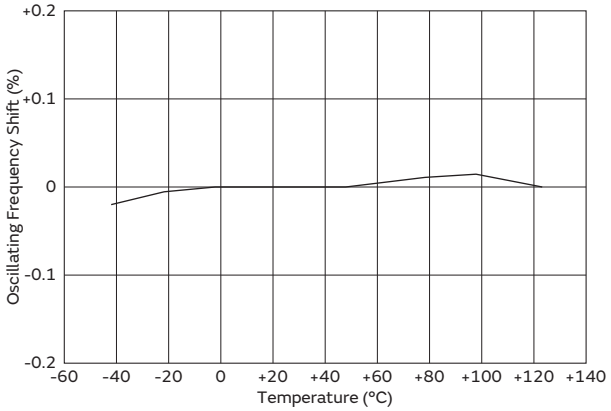

CSTCE_V13L/CSTCE_VH3L

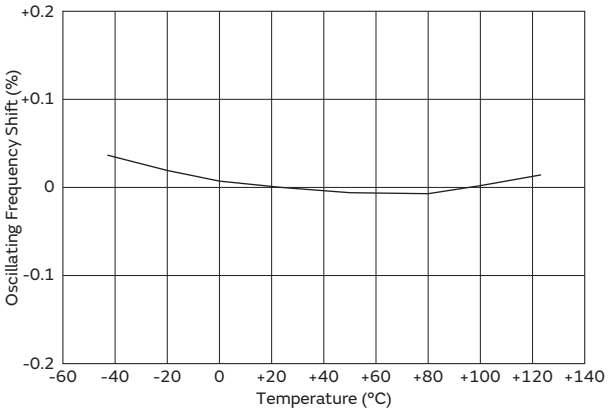


CSTCW_X11

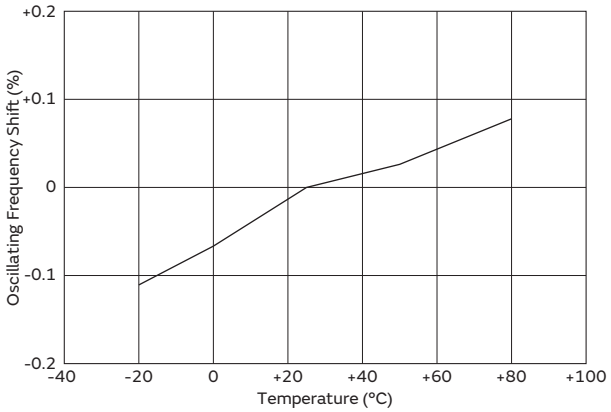

Application Circuits Utilization

M66291GP (Renesas)


USB Transceiver

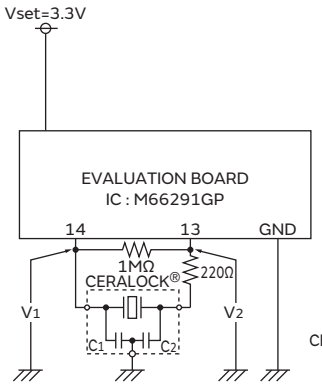

CERALOCK®: CSTCR6M00G15□□□-R0
C1=39pF (Typ.)
C2=39pF (Typ.)

MN102HF74GHL (Panasonic)

16-bit Microcontroller

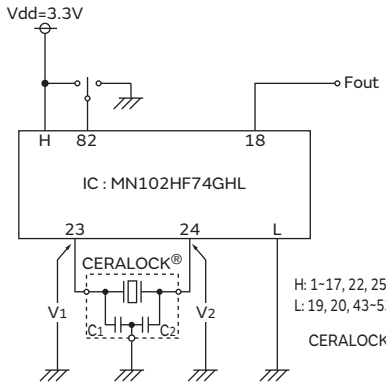


H: 1~17, 22, 25, 26~42, 54, 58~60, 66~81, 83~91
L: 19, 20, 43~53, 55~57, 61~65, 82, 92~100

CERALOCK®: CSTCE12M0G15L□□-R0
C1=33pF (Typ.)
C2=33pF (Typ.)

LC87F1964A (Sanyo)

8-bit Microcontroller

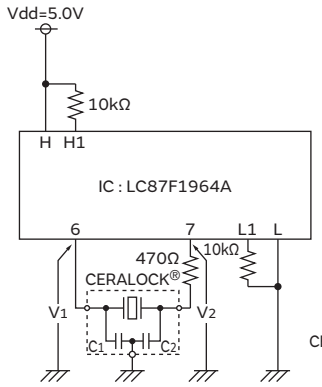


H: 8, 19, 39
L: 5, 20, 40
H1: 31, 33
L1: 29, 30, 32, 34~36

CERALOCK®: CSTCE12M0G15L□□-R0
C1=33pF (Typ.)
C2=33pF (Typ.)

TUSB2046B (Texas Instruments)

USB 4-port HUB

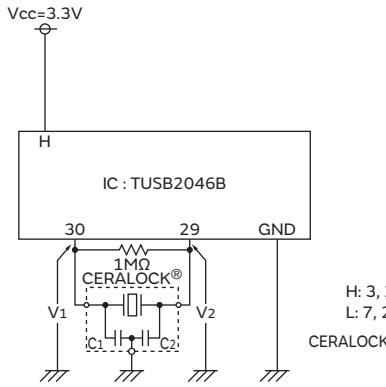


H: 3, 25
L: 7, 28

CERALOCK®: CSTCR6M00G15□□□-R0
C1=39pF (Typ.)
C2=39pF (Typ.)

ISP1181BDGG (Philips)

USB Controller

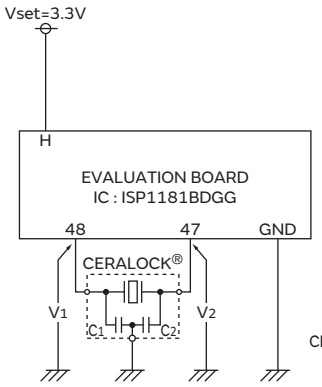

CERALOCK®: CSTCR6M00G15□□□-R0
C1=39pF (Typ.)
C2=39pF (Typ.)

Ceramic Resonators (CERALOCK®)

MHz Chip Type -Standard Frequency Tolerance for Consumer/Industrial Usage-

Chip type CERALOCK® with built-in load capacitors provides an extremely small package.
MURATA's package technology expertise has enabled the development of the Chip CERALOCK® with built-in load capacitors.
High-density mounting can be realized because of the small package and the elimination of the need for an external load capacitor.

Features


1. Oscillation circuits do not require external load capacitors.
2. Available in a wide frequency range.
3. Extremely small and have a low profile.
4. No adjustment is necessary for oscillation circuits.

Applications

1. Clock oscillators for microprocessors
2. Small electronic equipment such as handheld phone, digital video camcorder (DVC), digital still camera (DSC), portable audio player, etc.
3. Storage media and memory (HDD, Optical storage device, FDD, Flash memory card, etc.)
4. Office automation equipment (Mobile PC, Mouse, Keyboard, etc.)
5. Audio-visual applications (TV, DVD-HDD recorder, Audio equipment, Remote control, etc.)
6. Home appliances (Air conditioner, Microwave oven, Refrigerator, Washing machine, etc.)




CSTCC_G
2.00-3.99MHz

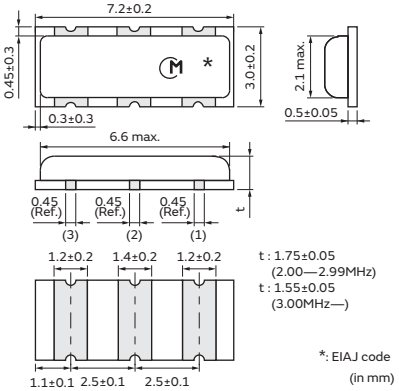




CSTCR_G
4.00-7.99MHz

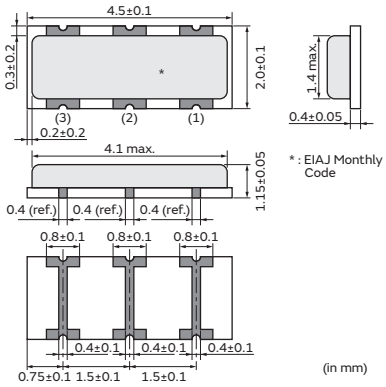




CSTCE_G/CSTCE_G_Z
8.00-13.99MHz

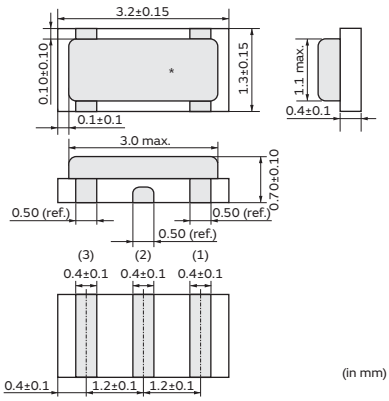




CSTCE_V
14.00-20.00MHz

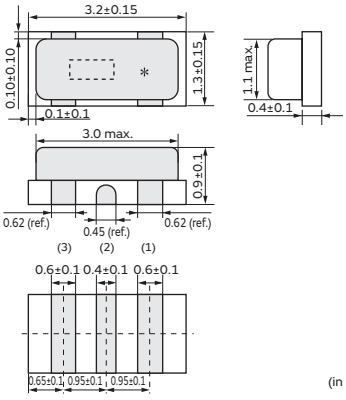



CSACW_X
20.01-70.00MHz

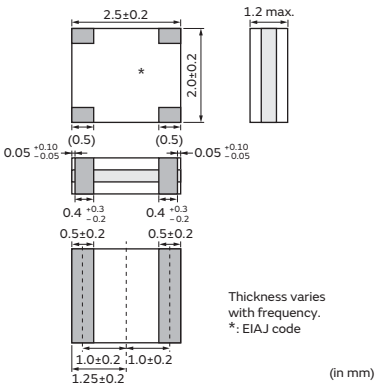


Continued on the following page. ↗

Continued from the preceding page. ↘



CSTCW_X
20.01-70.00MHz

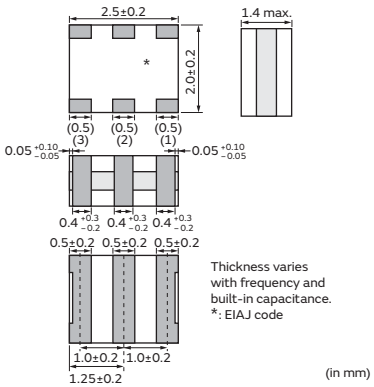


(in mm)

Part Number	Frequency (MHz)	Initial Frequency Tolerance (%)	Frequency Shift by Temperature (%)	Operating Temperature Range (°C)
CSTCC_G	2.00 to 3.99	±0.5	±0.3 [±0.4%:Built-in Capacitance 47pF type within Freq.2.00 to 3.49MHz]	-20 to 80
CSTCR_G	4.00 to 7.99	±0.5	±0.2	-20 to 80
CSTCE_G	8.00 to 13.99	±0.5	±0.2	-20 to 80
CSTCE_G_Z	8.00 to 13.99	±0.5	±0.2	-40 to 125
CSTCE_V	14.00 to 20.00	±0.5	±0.3	-20 to 80
CSACW_X	20.01 to 70.00	±0.5	±0.2	-20 to 80
CSTCW_X	20.01 to 70.00	±0.5	±0.2	-20 to 80


Irregular or stopped oscillation may occur under unmatched circuit conditions. Please check the actual conditions prior to use.

Measuring Circuit of Oscillating Frequency


CSTCR_G/CSTCE_G/CSTCE_G_Z/CSTCE_V

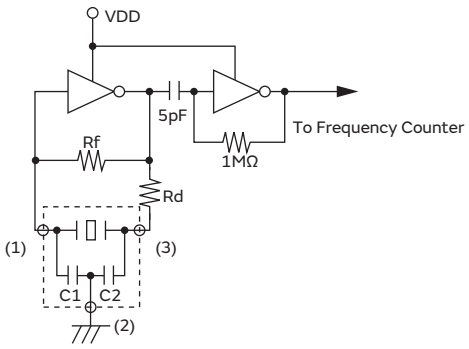

CSTCC_G/CSTCW_X

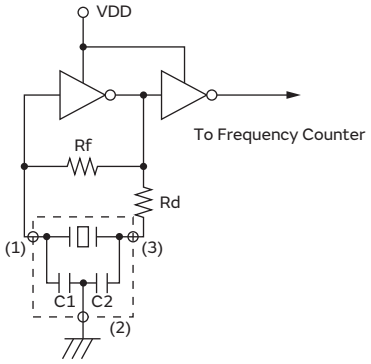


CSACW_X

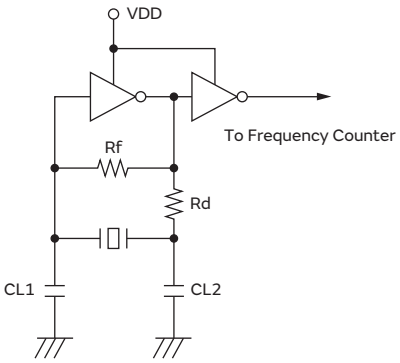


Standard Land Pattern Dimensions

CSTCC_G




(in mm)

CSTCR_G
(* This Land Pattern is not common to CSTCR_G15C, CSTCR_G15L, CSTCR_GH5L.)




(in mm)

CSTCE_G/CSTCE_G_Z

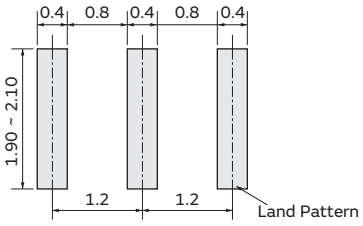


(in mm)

CSTCE_V
(* This Land Pattern is not common to CSTCE_V13C, CSTCE_V_C, CSTCE_V13L, CSTCE_VH3L.)




(in mm)

CSACW_X

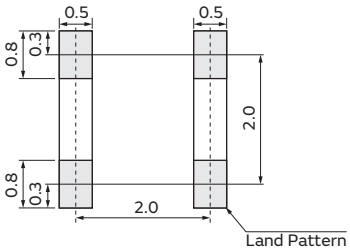

(in mm)


CSTCW_X




(in mm)

Frequency Temperature Characteristics


CSTCC_G

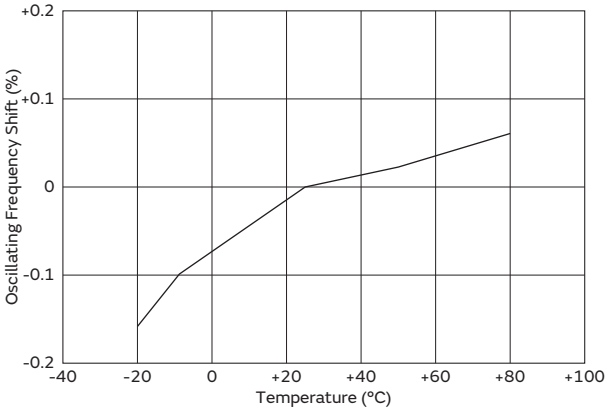


CSTCR_G

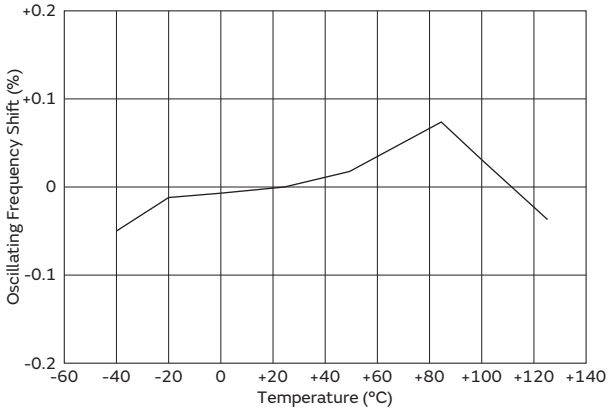


CSTCE_G/CSTCE_G_Z

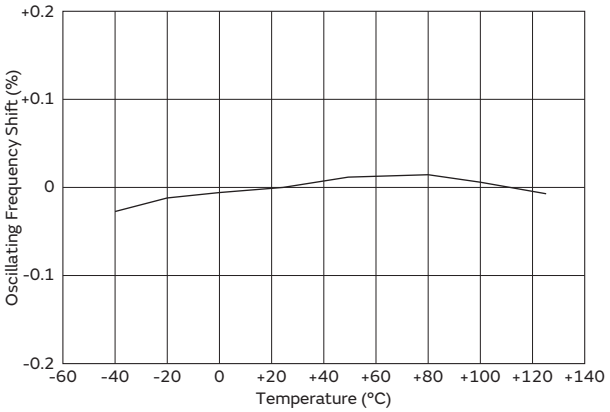


CSTCE_V

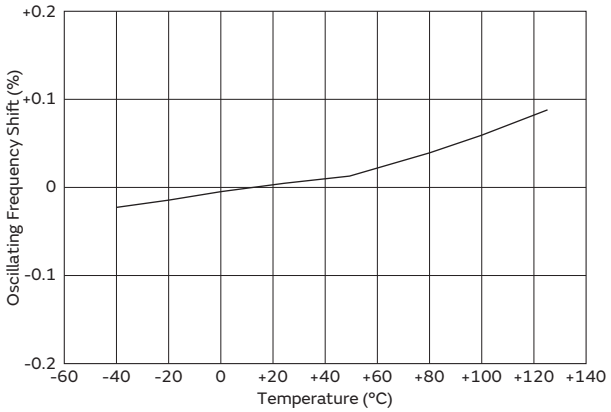

CSACW_X

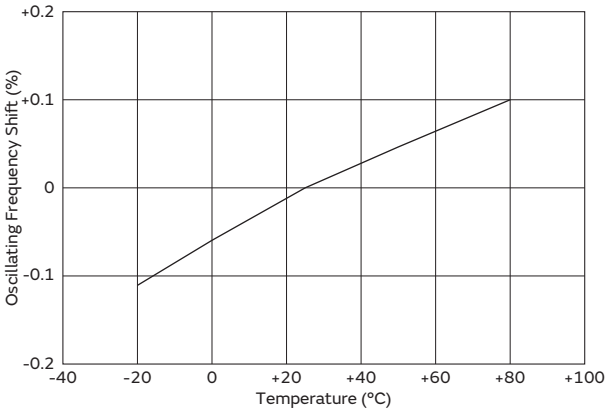


CSTCW_X

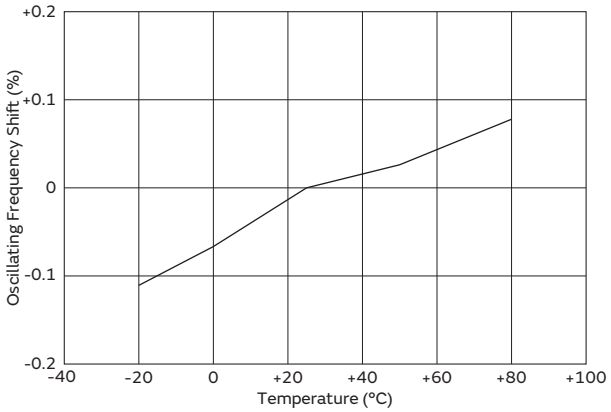

Application Circuits Utilization

μPD78F0533GB (Renesas)

8-bit Microcomputer

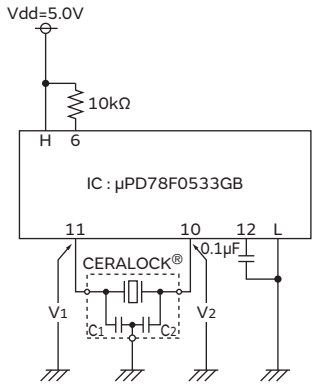


H: 15, 16, 47
L: 9, 13, 14, 48

CERALOCK®: CSTCR4M00G55-R0
C1=39pF (Typ.)
C2=39pF (Typ.)

TMP19A43FDXBG (Toshiba)

32-bit Microcomputer

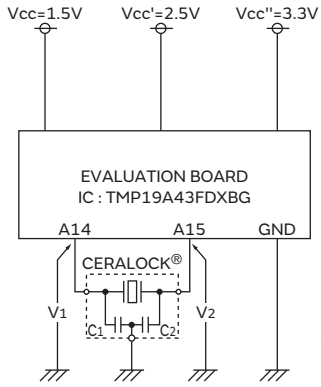


Xin: A14
Xout: A15

CERALOCK®: CSTCE10M0G52-R0
C1=10pF (Typ.)
C2=10pF (Typ.)

MN103SFC2D (Panasonic)

32-bit Microcomputer

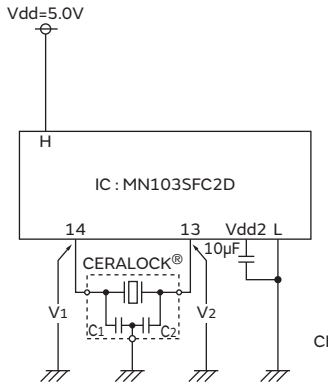


H: 9, 17, 34
L: 7, 15, 36
Vdd2: 16, 38

CERALOCK®: CSTCR5M00G55Z-R0
C1=39pF (Typ.)
C2=39pF (Typ.)

MB95F128H (Fujitsu)

8-bit Microcomputer

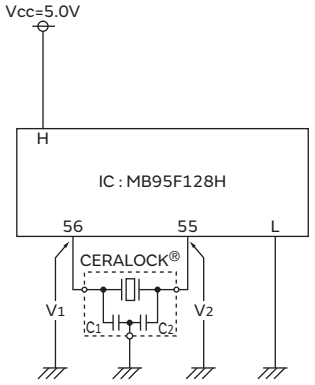


H: 3, 28, 51, 79
L: 4, 29, 54, 57

CERALOCK®: CSTCE8M00G52-R0
C1=10pF (Typ.)
C2=10pF (Typ.)

PIC16F716-I/SO (Microchip)


8-bit Microcomputer

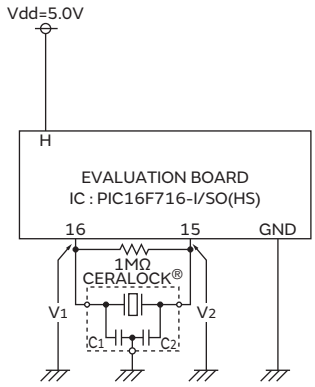

CERALOCK®: CSTCE12M0G52-R0
C1=10pF (Typ.)
C2=10pF (Typ.)

HD64F36077GH (Renesas)

16-bit Microcomputer

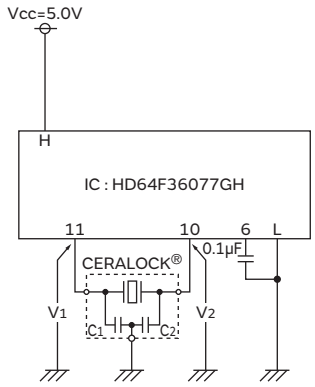

H: 3, 7, 12
L: 8, 9

CERALOCK®: CSTCE8M00G52-R0
C1=10pF (Typ.)
C2=10pF (Typ.)


Continued on the following page. ↗

Application Circuits Utilization

Continued from the preceding page.↘

μPD70F3215HYGC (Renesas)

32-bit Microcomputer

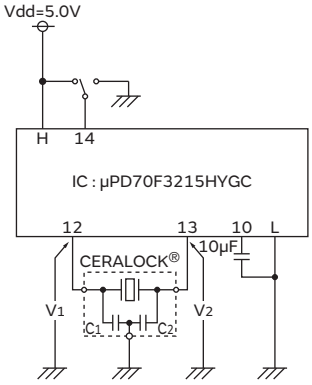


H: 1, 5, 9, 34, 70
L: 2, 8, 11, 33, 69

CERALOCK®: CSTCR5M00G55-R0
C1=39pF (Typ.)
C2=39pF (Typ.)

ATmega128 (Atmel)

8-bit Microcomputer

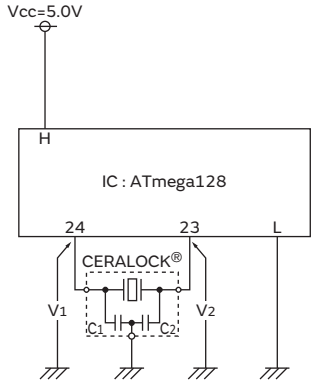


H: 21, 52, 64
L: 22, 53, 63

CERALOCK®: CSTCE8M00G52-R0
C1=10pF (Typ.)
C2=10pF (Typ.)

ST7FLITE29F2B6 (ST Microelectronics)

8-bit Microcomputer

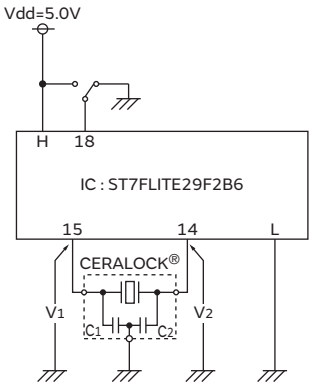


H: 17
L: 16

CERALOCK®: CSTCE16M0V53-R0
C1=15pF (Typ.)
C2=15pF (Typ.)

TMS320F2810PBKA (Texas Instruments)

32-bit Microcomputer

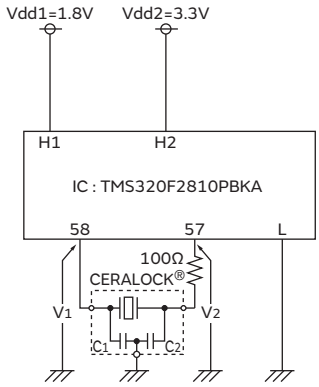

H1: 20, 29, 42, 56, 63, 74, 82, 94, 99, 100, 102, 110, 114
H2: 1, 13, 14, 25, 49, 52, 83, 104, 118
L: 12, 15, 17, 26, 30, 39, 53, 59, 62, 73, 88, 95, 103, 109, 115, 117, 128

CERALOCK®: CSTCE15M0V53-R0
C1=15pF (Typ.)
C2=15pF (Typ.)


Ceramic Resonators (CERALOCK®)

MHz Lead Type -Standard Frequency Tolerance for Consumer/Industrial Usage-

MURATA's ceramic resonator, CERALOCK® with built-in load capacitors, has been widely applied as the most suitable component for clock oscillators in a broad range of microprocessors.
The CSTLS series can be used in the design of oscillation circuits not requiring external load capacitors, enabling both high-density mounting and cost reduction.




CSTLS_G
3.40-10.00MHz

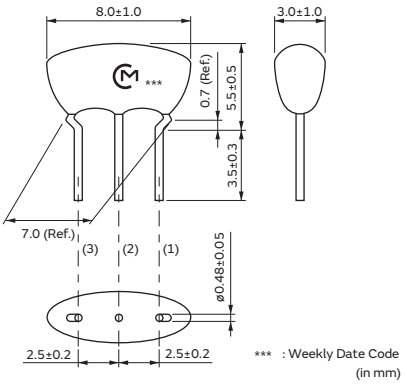



CSTLS_X
16.00-70.00MHz

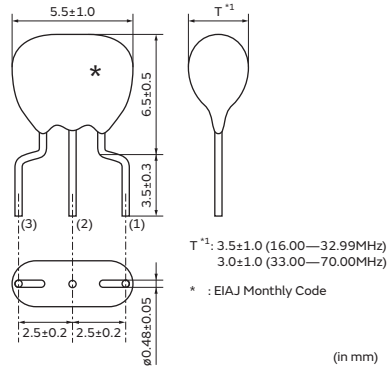

Features

1. Oscillation circuits do not require external load capacitors. There is some variation in built-in capacitance values applicable to various IC.
2. Stable over a wide temperature range.
3. Compact, lightweight and exhibit superior shock resistance performance.
4. Enable the design of oscillator circuits requiring no adjustment.
5. Cost-effective and reliable availability


Applications

1. DTMF generators
2. Clock oscillators for microcomputers
3. Remote control units
4. Automated office equipment

Part Number	Frequency (MHz)	Initial Frequency Tolerance (%)	Frequency Shift by Temperature (%)	Operating Temperature Range (°C)
CSTLS_G	3.40 to 10.00	±0.5	±0.2 [-0.4% to +0.2%:Built-in Capacitance 47pF type]	-20 to 80
CSTLS_X	16.00 to 70.00	±0.5	±0.2	-20 to 80


Irregular or stopped oscillation may occur under unmatched circuit conditions. Please check the actual conditions prior to use.
The order quantity should be an integral multiple of the "Minimum Quantity" shown in the packaging page.

Measuring Circuit of Oscillating Frequency

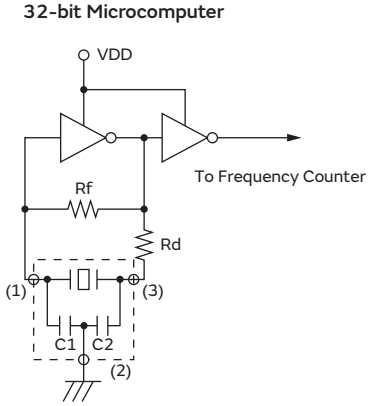


Frequency Temperature Characteristics

CSTLS_G

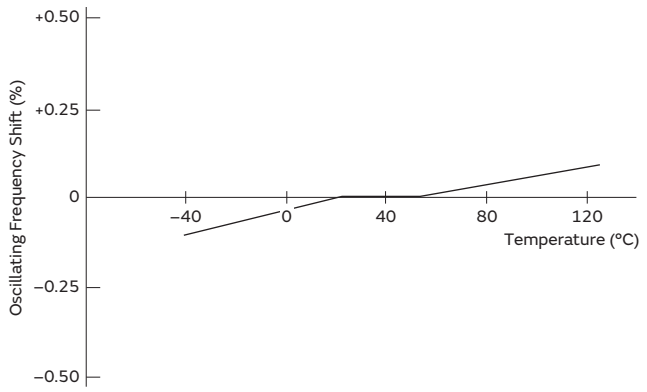


CSTLS_X

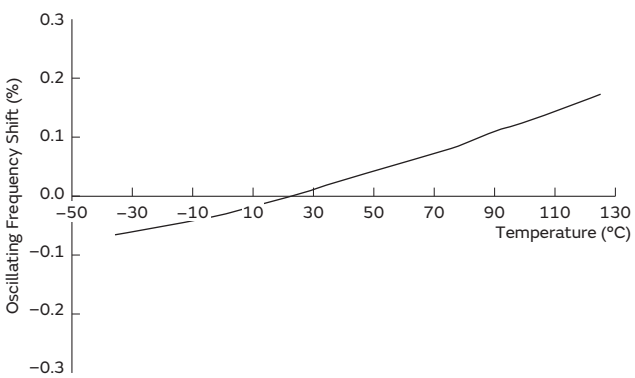

Application Circuits Utilization


M38235G6HP (Renesas)

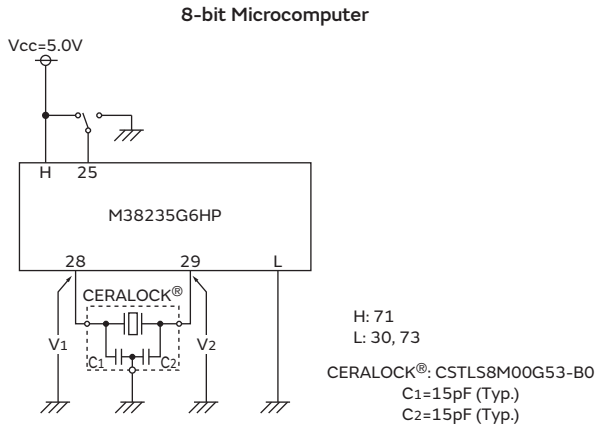

H: 71
L: 30, 73

CERALOCK®: CSTLS8M00G53-B0
C1=15pF (Typ.)
C2=15pF (Typ.)

LC87F5G32A (Sanyo)

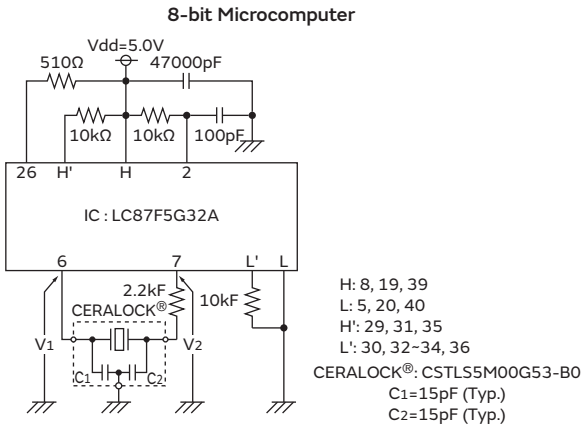

H: 8, 19, 39
L: 5, 20, 40
H': 29, 31, 35
L': 30, 32~34, 36

CERALOCK®: CSTLS5M00G53-B0
C1=15pF (Typ.)
C2=15pF (Typ.)

5

Notice for Consumer/Industrial Usage -MHz Chip Type-

Soldering and Mounting (CSTCC Series)

1. Soldering

(1) Reflow soldering

Please mount component on a circuit board by reflow soldering. Flow soldering is not acceptable.


Recommendable Flux and Solder

Flux	Please use rosin based flux, not water soluble flux.
Solder	Please use solder (Sn-3.0Ag-0.5Cu) under the following conditions: Standard thickness of soldering paste: 0.10 to 0.15mm.

Recommendable Soldering Profile

Pre-heating	150 to 180°C	60 to 120s
Heating	220°C min.	30 to 60s
Peak Temperature	upper limit: 260°C	1s max.
	lower limit: 245°C	5s max.

Temperature shall be measured on the surface of component.

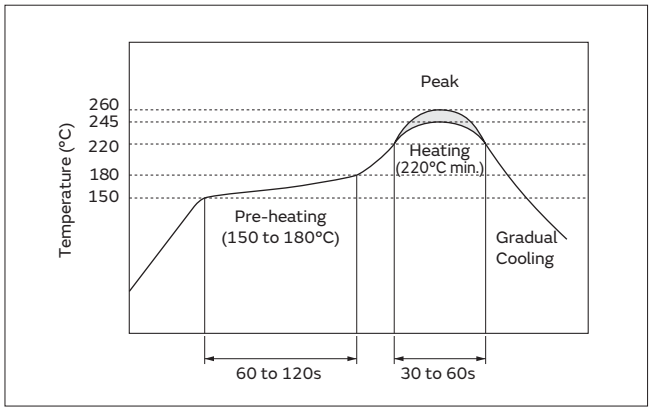

(2) Soldering with Iron

If compelled to mount the component by using soldering iron, please do not directly touch the component with the soldering iron. The component terminals or electrical characteristics may be damaged if excessive thermal stress is applied.

Recommendable Soldering with Iron

Heating of the soldering iron	350°C max.
Watt	30W max.
Shape of the soldering iron	ø3mm max.
Soldering Time	5s max. at one terminal
Solder	Sn-3.0Ag-0.5Cu

(3) Solder Volume

Please make the solder volume less than the height of the substrate to avoid damage to the seal between the metal cap and the substrate.

(4) Other

Do not reuse components removed from a circuit board after soldering.

(5) Conditions for Placement Machines

The component is recommended with placement machines that employ optical placement capabilities. The component may be damaged by excessive mechanical force. Please make sure that you have evaluated by using placement machines before going into mass production. Do not use placement machines that utilize mechanical positioning. Please contact Murata for details beforehand.

Continued on the following page.↗

Notice for Consumer/Industrial Usage -MHz Chip Type-

Continued from the preceding page.↘

2. Wash

Some series do not withstand washing.
Please check the list at right before use.

Series	Wash
CSTCC (2.00 to 3.49MHz)	Not Available
CSTCC (3.50 to 3.99MHz)	Available

(1) Cleaning Solvents
HCFC, Isopropanol, Tap water, Demineralized water, Cleanthrough750H, Pine alpha 100S, Techno care FRW

(2) Temperature Difference : dT *1
dT≦60°C (dT=Component-solvent)
*1 ex. If the component is immersed at +90°C into cleaning solvent at +60°C, then dT=30°C.

(3) Conditions
(a) Ultrasonic Wash
1 minute max. in above solvent at +60°C max.
(Frequency: 28kHz, Output: 20W/l)
(b) Immersion Wash
5 minutes max. in above solvent at +60°C max.
(c) Shower or Rinse Wash
5 minutes max. in above solvent at +60°C max.

(4) Drying
5 minutes max. by air blowing at +80°C max.

(5) Other
(a) Total washing time should be within 10 minutes.
(b) The component may be damaged if it is washed with chlorine, petroleum, or alkali cleaning solvent.

3. Coating

Conformal coating of the component is acceptable. However, the resin material, curing temperature, and other process conditions should be evaluated to confirm stable electrical characteristics are maintained.

Notice for Consumer/Industrial Usage -MHz Chip Type-

Soldering and Mounting (CSTCR/CSTCE_V/CSTCE_G Series)

1. Soldering

(1) Reflow soldering

Please mount component on a circuit board by reflow soldering. Flow soldering is not acceptable.


Recommendable Flux and Solder

Flux	Please use rosin based flux, not water soluble flux.
Solder	Please use solder (Sn-3.0Ag-0.5Cu) under the following conditions: Standard thickness of soldering paste: 0.10 to 0.15mm.

Recommendable Soldering Profile

Pre-heating	150 to 180°C	60 to 120s
Heating	220°C min.	30 to 60s
Peak Temperature	upper limit: 260°C	1s max.
	lower limit: 245°C	5s max.

Temperature shall be measured on the surface of component.

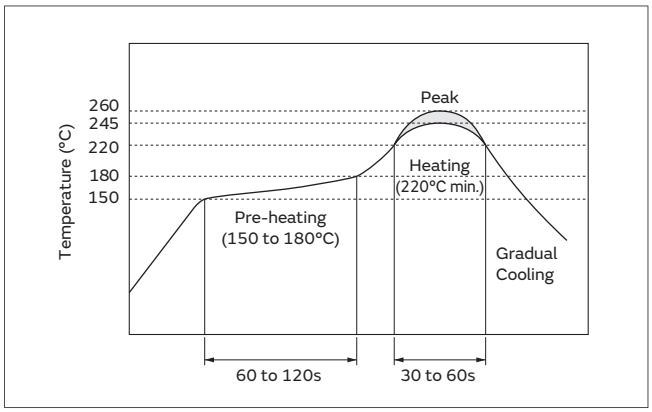

(2) Soldering with Iron

If compelled to mount the component by using soldering iron, please do not directly touch the component with the soldering iron. The component terminals or electrical characteristics may be damaged if excessive thermal stress is applied.

Recommendable Soldering with Iron

Heating of the soldering iron	350°C max.
Watt	30W max.
Shape of the soldering iron	ø3mm max.
Soldering Time	5s max. at one terminal
Solder	Sn-3.0Ag-0.5Cu

(3) Solder Volume

Please make the solder volume less than the height of the substrate to avoid damage to the seal between the metal cap and the substrate.

(4) Other

Do not reuse components removed from a circuit board after soldering.

(5) Conditions for Placement Machines

The component is recommended with placement machines that employ optical placement capabilities. The component may be damaged by excessive mechanical force. Please make sure that you have evaluated by using placement machines before going into mass production. Do not use placement machines that utilize mechanical positioning. Please contact Murata for details beforehand.

2. Washing / Coating

Conformal coating or washing of the component is not acceptable, because it is not hermetically sealed.
Please contact us if you need a washable component.

Continued on the following page.↗

Notice for Consumer/Industrial Usage -MHz Chip Type-

Continued from the preceding page.↘

Soldering and Mounting (CSACW/CSTCW Series)

1. Soldering

(1) Reflow soldering

Please mount component on a circuit board by reflow soldering. Flow soldering is not acceptable.


Recommendable Flux and Solder

Flux	Please use rosin based flux, not water soluble flux.
Solder	Please use solder (Sn-3.0Ag-0.5Cu) under the following conditions: Standard thickness of soldering paste: 0.10 to 0.15mm.

Recommendable Soldering Profile

Pre-heating	150 to 180°C	60 to 120s
Heating	220°C min.	30 to 60s
Peak Temperature	upper limit: 260°C	1s max.
	lower limit: 245°C	5s max.

Temperature shall be measured on the surface of component.

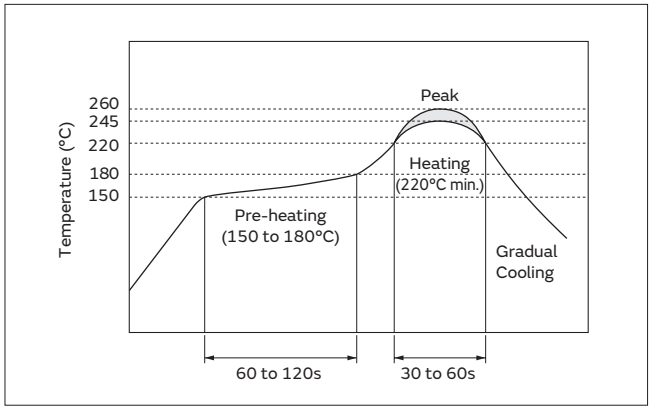

(2) Soldering with Iron

If compelled to mount the component by using soldering iron, please do not directly touch the component with the soldering iron. The component terminals or electrical characteristics may be damaged if excessive thermal stress is applied.

Recommendable Soldering with Iron

Heating of the soldering iron	350°C max.
Watt	30W max.
Shape of the soldering iron	ø3mm max.
Soldering Time	5s max. at one terminal
Solder	Sn-3.0Ag-0.5Cu

(3) Other

Do not reuse components removed from a circuit board after soldering.

(4) Conditions for Placement Machines

The component is recommended with placement machines that employ optical placement capabilities. The component may be damaged by excessive mechanical force. Please make sure that you have evaluated by using placement machines before going into mass production. Do not use placement machines that utilize mechanical positioning. Please contact Murata for details beforehand.

2. Washing / Coating

Conformal coating or washing of the component is not acceptable, because it is not hermetically sealed.
Please contact us if you need a washable component.

Notice for Consumer/Industrial Usage -MHz Chip Type-

Storage and Operating Conditions

1. Product Storage Conditions
   Please store the products in a room where the temperature/humidity is stable, and avoid such places where there are large temperature changes. Please store the products under the following conditions:
   Temperature: -10 to +40°C
   Humidity: 15 to 85% R.H.
2. Expiration Date on Storage
   Expiration date (Shelf life) of the products is six months after delivery under the conditions of a sealed and unopened package. Please use the products within six months after delivery. If you store the products for a long time (more than six months), use carefully because the products may be degraded in solderability and/or rusty.
   Please confirm solderability and characteristics for the products regularly.
3. Notice on Product Storage
   (1) Please do not store the products in a chemical atmosphere (Acids, Alkali, Bases, Organic gas, Sulfides and so on), because the characteristics may be reduced in quality, and/or be degraded in the solderability due to the storage in a chemical atmosphere.
   (2) Please do not put the products directly on the floor without anything under them to avoid damp and/or dusty places.
   (3) Please do not store the products in places such as: in a damp heated place, in a place where direct sunlight comes in, in a place applying vibrations.
   (4) Please use the products immediately after the package is opened, because the characteristics may be reduced in quality, and/or be degraded in the solderability due to storage under the poor conditions.
   (5) Please do not drop the products to avoid cracking of ceramic elements.
4. Other
   Conformal coating or washing of the component is not acceptable because it is not hermetically sealed.
   Please be sure to consult with our sales representatives or engineers whenever and prior to using the products.

Rating

The component may be damaged if excessive mechanical stress is applied.

Handling

"CERALOCK" may stop oscillating or oscillate irregularly under improper circuit conditions.

Notice for Consumer/Industrial Usage -MHz Lead Type-

Soldering and Mounting

The component cannot withstand washing.
Please do not apply excessive mechanical stress to the component and lead terminals during soldering.

Storage and Operating Conditions

1. Product Storage Conditions
   Please store the products in a room where the temperature/humidity is stable, and avoid such places where there are large temperature changes. Please store the products under the following conditions:
   Temperature: -10 to +40°C
   Humidity: 15 to 85% R.H.
2. Expiration Date on Storage
   Expiration date (Shelf life) of the products is six months after delivery under the conditions of a sealed and unopened package. Please use the products within six months after delivery. If you store the products for a long time (more than six months), use carefully because the products may be degraded in solderability and/or rusty.
   Please confirm solderability and characteristics for the products regularly.
3. Notice on Product Storage
   (1) Please do not store the products in a chemical atmosphere (Acids, Alkali, Bases, Organic gas, Sulfides and so on), because the characteristics may be reduced in quality, and/or be degraded in the solderability due to the storage in a chemical atmosphere.
   (2) Please do not put the products directly on the floor without anything under them to avoid damp and/or dusty places.
   (3) Please do not store the products in places such as: in a damp heated place, in a place where direct sunlight comes in, in a place applying vibrations.
   (4) Please use the products immediately after the package is opened, because the characteristics may be reduced in quality, and/or be degraded in the solderability due to storage under the poor conditions.
   (5) Please do not drop the products to avoid cracking of ceramic elements.
4. Other
   Conformal coating or washing of the component is not acceptable because it is not hermetically sealed.
   Please be sure to consult with our sales representatives or engineers whenever and prior to using the products.

Rating

The component may be damaged if excessive mechanical stress is applied.

Handling

"CERALOCK" may stop oscillating or oscillate irregularly under improper circuit conditions.


Packaging for Consumer/Industrial Usage -MHz Chip Type-

Minimum Quantity

Part Number	Plastic Tape ø180mm	Plastic Tape ø330mm	Bulk	Reel Dimensions
CSTCC_G	2,000	6,000	500	a
CSTCR_G	3,000	9,000	500	a
CSTCR_G15L	3,000	9,000	500	a
CSTCR_GH5L	3,000	9,000	500	a
CSTCE_G	3,000	9,000	500	b
CSTCE_G15L	3,000	9,000	500	b
CSTCE_GH5L	3,000	9,000	500	b
CSTCE_V	3,000	9,000	500	b
CSTCE_V13L	3,000	9,000	500	b
CSTCE_VH3L	3,000	9,000	500	b
CSTCW_X	3,000	9,000	500	b
CSTCW_X11	3,000	9,000	500	b
CSACW_X	3,000	9,000	500	b


The order quantity should be an integral multiple of the "Minimum Quantity" shown above. (pcs.)

Dimensions of Reel

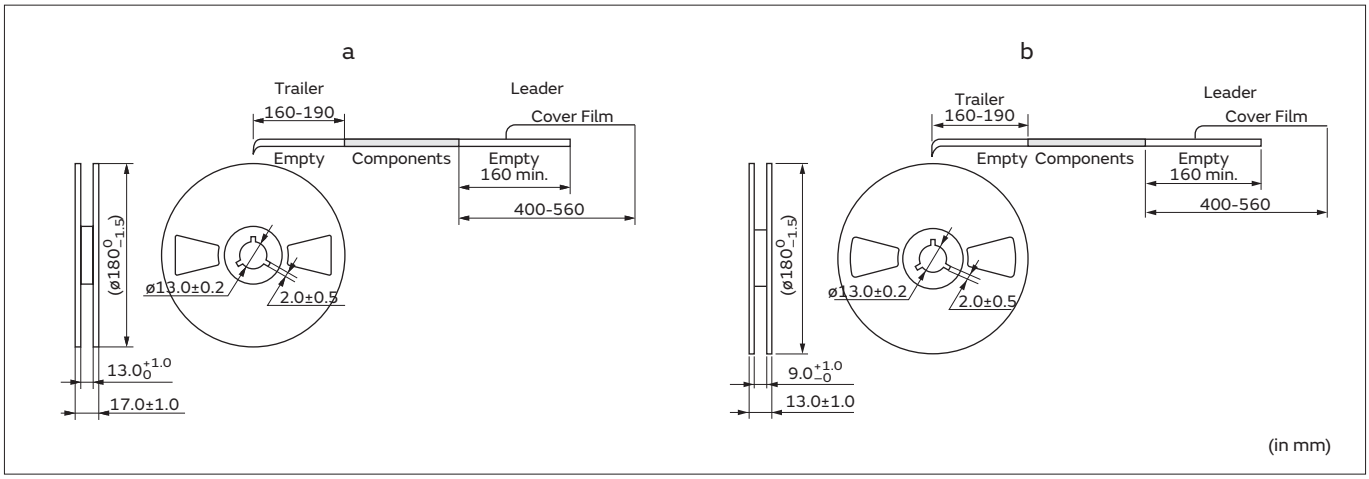


Dimensions of Taping

CSTCR_G15L/CSTCR_GH5L

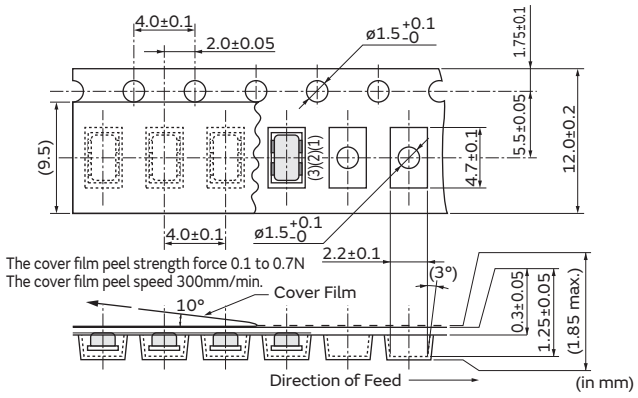

CSTCE_G15L/CSTCE_GH5L

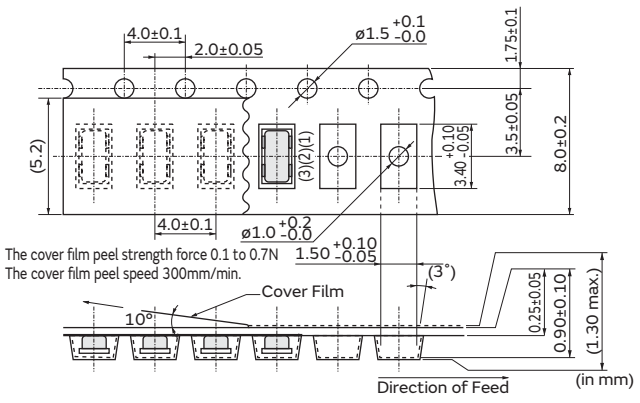


Continued on the following page. ↗

Packaging for Consumer/Industrial Usage -MHz Chip Type-


Continued from the preceding page.↘

Dimensions of Taping

CSTCE_V13L/CSTCE_VH3L

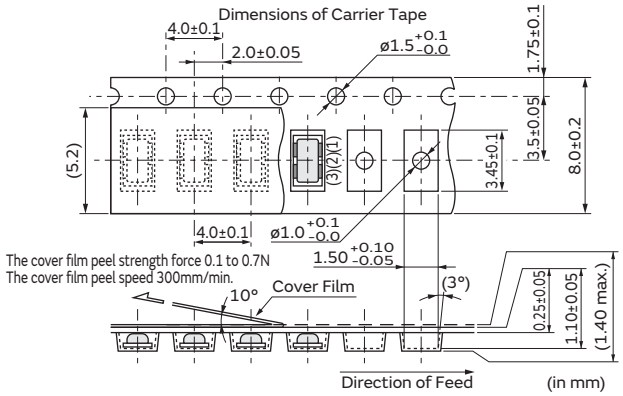

CSTCW_X11

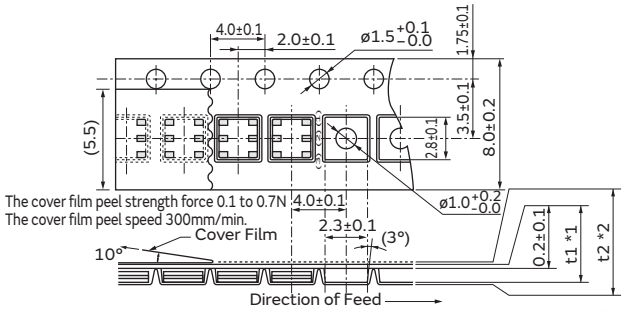


*1, *2: Dimensions vary with product thickness of CERALOCK®.

Thickness of CERALOCK®		1.40–1.20	1.15–1.00	0.95–0.90
t1	*1	1.48±0.1	1.30±0.1	1.12±0.1
t2	*2	2.1 max.	1.9 max.	1.7 max.

(in mm)

CSTCC_G

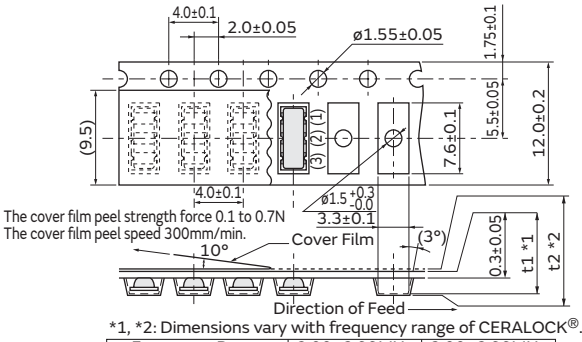


*1, *2: Dimensions vary with frequency range of CERALOCK®.


Frequency Range		2.00–2.99MHz	3.00–3.99MHz
t1	*1	1.85±0.05	1.65±0.05
t2	*2	2.45 max.	2.25 max.

(in mm)


CSTCR_G

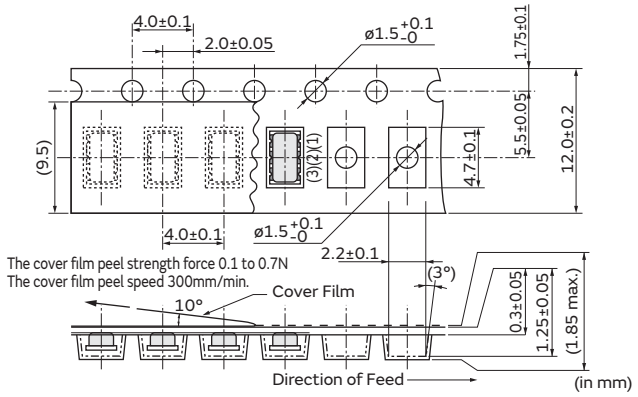


CSTCE_G

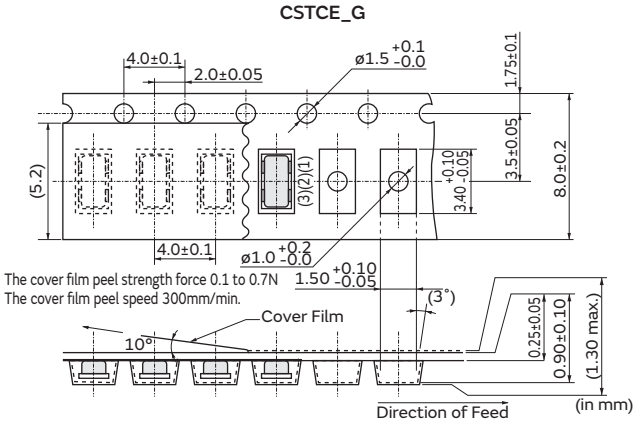

CSTCE_V

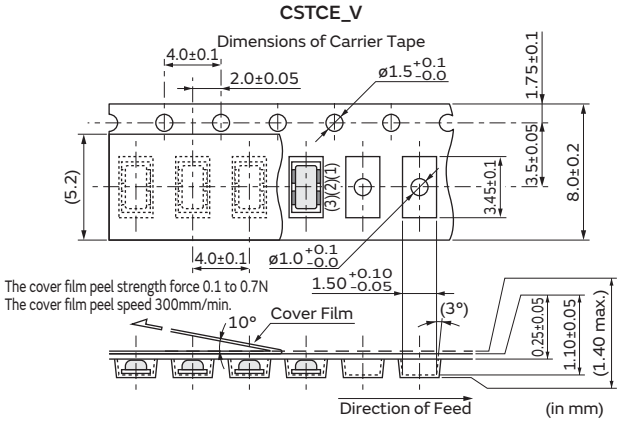

CSACW_X

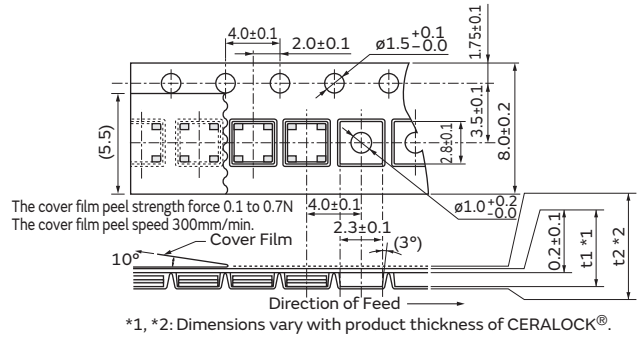


*1, *2: Dimensions vary with product thickness of CERALOCK®.

Thickness of CERALOCK®		1.40–1.20	1.15–1.00	0.95–0.90
t1	*1	1.48±0.1	1.30±0.1	1.12±0.1
t2	*2	2.1 max.	1.9 max.	1.7 max.

(in mm)

CSTCW_X

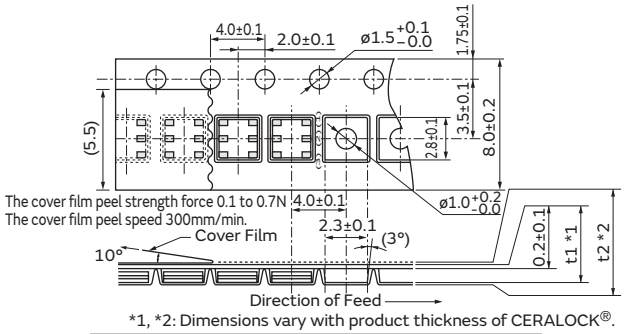

*1, *2: Dimensions vary with product thickness of CERALOCK®.

Thickness of CERALOCK®		1.40–1.20	1.15–1.00	0.95–0.90
t1	*1	1.48±0.1	1.30±0.1	1.12±0.1
t2	*2	2.1 max.	1.9 max.	1.7 max.

(in mm)


Packaging for Consumer/Industrial Usage -MHz Lead Type-

Minimum Quantity

Part Number	Ammo Pack	Bulk
CSTLS_G (3.40 to 10.0MHz)	2,000	500
CSTLS_X (16.00 to 70.00MHz)	2,000	500

The order quantity should be an integral multiple of the "Minimum Quantity" shown above. (pcs.)

Tape Dimensions of CSTLS_G

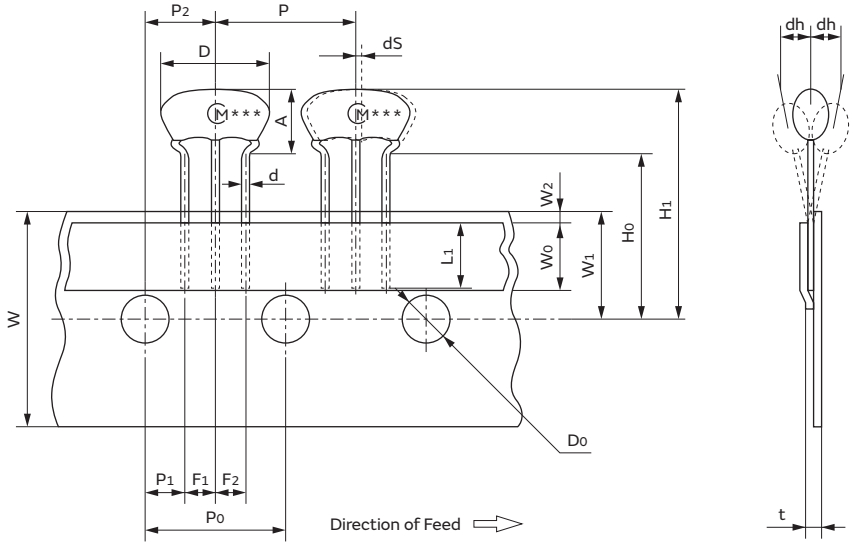

Item	Code	Dimensions	Tolerance	Remarks
Width of diameter	D	8.0	±1.0	
Height of resonator	A	5.5	±0.5	
Dimensions of terminal	d	ø0.48	±0.05	
Lead length under the hold down tape	L_1	5.0 min.	–	
Pitch of component	P	12.7	±0.5	Tolerance for Pitches 10xP_0=127±1
Pitch of sprocket hole	P_0	12.7	±0.2	
Length from sprocket hole center to lead	P_1	3.85	±0.5	
Length from sprocket hole center to component center	P_2	6.35	±0.5	
Lead spacing (I)	F_1	2.5	±0.2	
Lead spacing (II)	F_2	2.5	±0.2	
Slant forward or backward	dh	0	±1.0	1mm max.
Width of carrier tape	W	18.0	±0.5	
Width of hold down tape	W_0	6.0 min.	–	Hold down tape does not exceed the carrier tape.
Position of sprocket hole	W_1	9.0	±0.5	
Gap of hold down tape and carrier tape	W_2	0	$^{+0.5}_{-0}$	
Distance between the center of sprocket hole and lead stopper	H_0	18.0	±0.5	
Total height of resonator	H_1	23.5	±1.0	
Diameter of sprocket hole	D_0	ø4.0	±0.2	
Total tape thickness	t	0.6	±0.2	
Body tilt	dS	0	±1.0	


(in mm)

Continued on the following page.↗

Packaging for Consumer/Industrial Usage -MHz Lead Type-

Continued from the preceding page.↘

Tape Dimensions of CSTLS_X

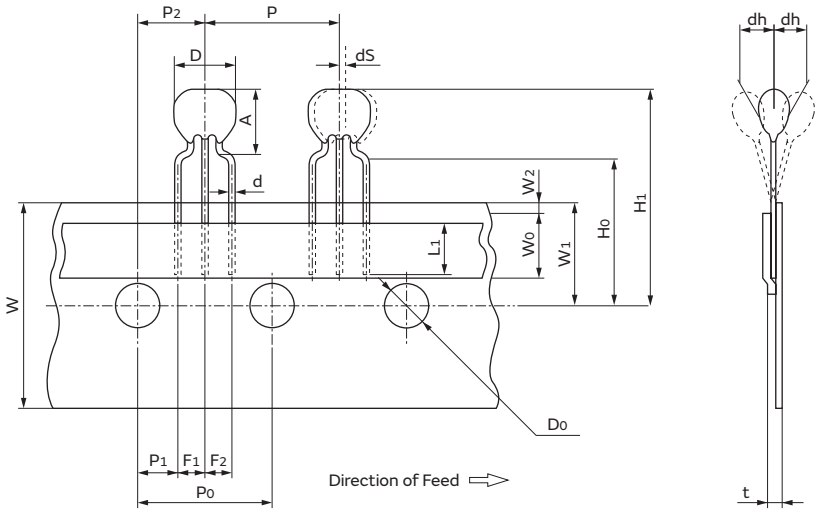

Item	Code	Dimensions	Tolerance	Remarks
Width of diameter	D	5.5	±1.0	
Height of resonator	A	6.5	±0.5	
Dimensions of terminal	d	ø0.48	±0.05	
Lead length under the hold down tape	L_1	5.0 min.	–	
Pitch of component	P	12.7	±0.5	Tolerance for Pitches 10xP_0=127±1
Pitch of sprocket hole	P_0	12.7	±0.2	
Length from sprocket hole center to lead	P_1	3.85	±0.5	
Length from sprocket hole center to component center	P_2	6.35	±0.5	
Lead spacing (I)	F_1	2.5	±0.2	
Lead spacing (II)	F_2	2.5	±0.2	
Slant forward or backward	dh	0	±1.0	1mm max.
Width of carrier tape	W	18.0	±0.5	
Width of hold down tape	W_0	6.0 min.	–	Hold down tape does not exceed the carrier tape.
Position of sprocket hole	W_1	9.0	±0.5	
Gap of hold down tape and carrier tape	W_2	0	$^{+0.5}_{-0.0}$	
Distance between the center of sprocket hole and lead stopper	H_0	18.0	±0.5	
Total height of resonator	H_1	24.5	±1.0	
Diameter of sprocket hole	D_0	ø4.0	±0.2	
Total tape thickness	t	0.6	±0.2	
Body tilt	dS	0	±1.0	

(in mm)

P16E.pdf
Dec.25,2015
Cat. No. P16E-25

Global Locations

For details please visit www.murata.com



⚠Note

1 Export Control

For customers outside Japan:

No Murata products should be used or sold, through any channels, for use in the design, development, production, utilization, maintenance or operation of, or otherwise contribution to (1) any weapons (Weapons of Mass Destruction [nuclear, chemical or biological weapons or missiles] or conventional weapons) or (2) goods or systems specially designed or intended for military end-use or utilization by military end-users.

For customers in Japan:

For products which are controlled items subject to the "Foreign Exchange and Foreign Trade Law" of Japan, the export license specified by the law is required for export.

2 Please contact our sales representatives or product engineers before using the products in this catalog for the applications listed below, which require especially high reliability for the prevention of defects which might directly damage a third party's life, body or property, or when one of our products is intended for use in applications other than those specified in this catalog.

1. *Aircraft equipment*
2. *Aerospace equipment*
3. *Undersea equipment*
4. *Power plant equipment*
5. *Medical equipment*
6. *Transportation equipment (vehicles, trains, ships, etc.)*
7. *Traffic signal equipment*
8. *Disaster prevention / crime prevention equipment*
9. *Data-processing equipment*
10. *Application of similar complexity and/or reliability requirements to the applications listed above*

3 Product specifications in this catalog are as of December 2015. They are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. If there are any questions, please contact our sales representatives or product engineers.

4 Please read rating and ⚠CAUTION (for storage, operating, rating, soldering, mounting and handling) in this catalog to prevent smoking and/or burning, etc.

5 This catalog has only typical specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

6 Please note that unless otherwise specified, we shall assume no responsibility whatsoever for any conflict or dispute that may occur in connection with the effect of our and/or a third party's intellectual property rights and other related rights in consideration of your use of our products and/or information described or contained in our catalogs. In this connection, no representation shall be made to the effect that any third parties are authorized to use the rights mentioned above under licenses without our consent.

7 No ozone depleting substances (ODS) under the Montreal Protocol are used in our manufacturing process.

Murata Manufacturing Co., Ltd.

www.murata.com

muRata
INNOVATOR IN ELECTRONICS