EN: This Datasheet/Document is presented by the manufacturer.


Please visit our website for pricing and availability at www.hestore.hu.

GP Batteries

Data Sheet ***Model No.: GP1604G***


NO MERCURY ADDED

Description	: Mercury Free Layer Built Extra Heavy Duty Battery
Chemical System	: Carbon Zinc
Nominal Voltage	: 9.0 Volts
Nominal Dimensions	: 26.5 mm x 17.5 mm x 48.5 mm
Terminals	: Standard snap fastener stud (+) and socket(-)
Jacket	: Metal jacket
Applications	: All electronic devices, e.g. toys, remote controls
Warranty Period	: 24 months
Average Weight	: 37.5g

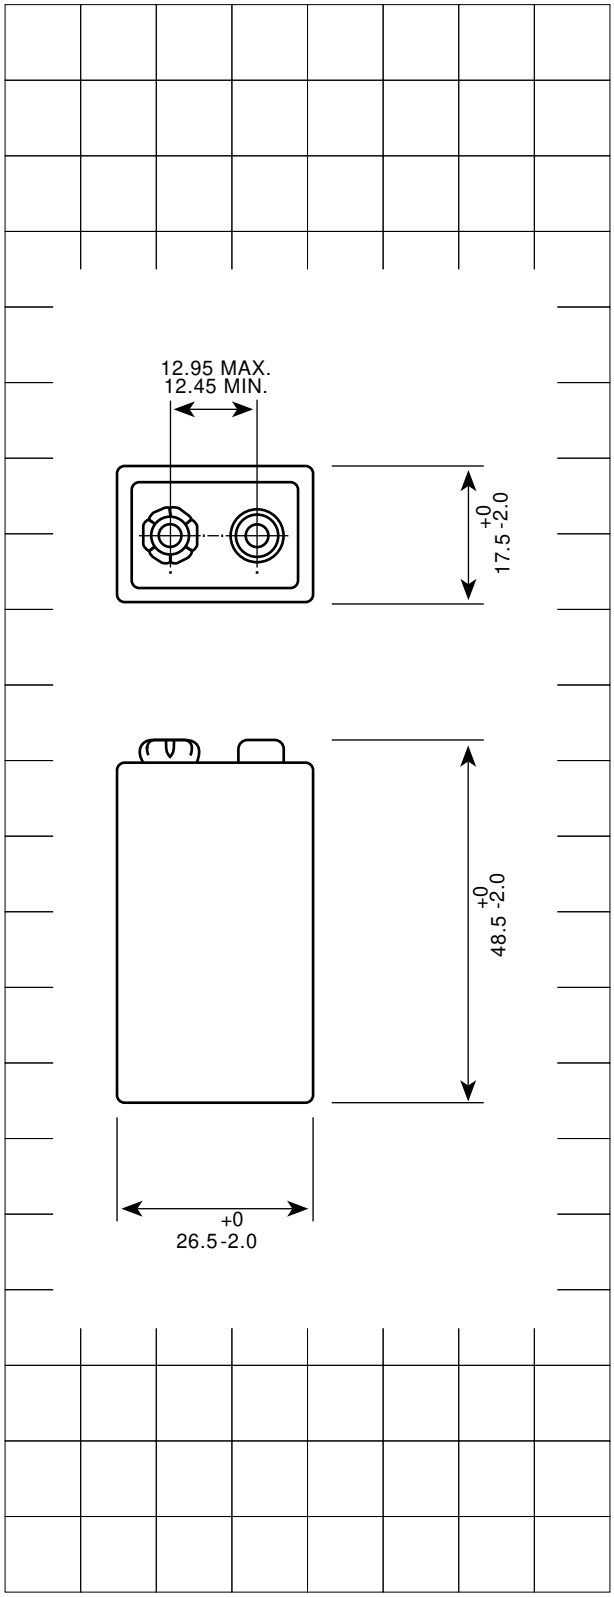

Estimated Service :

Discharge Resistance	Discharge Condition	End Point Voltage	Service Life
620 Ohms	2 Hrs/ Day 7 Days/ Week	5.40V	30.0 Hrs
180 Ohms	30 Mins/ Day 7 Days/ Week	4.80V	8.6 Hrs

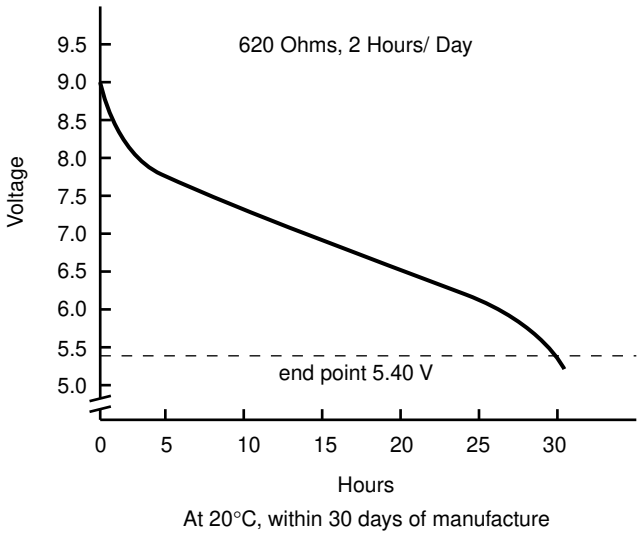

At 20°C, within 30 days of manufacture

Cross References:

GP	JIS	IEC	Eveready
1604G	6F22	6F22	1222

Member
Gold Peak Group

Manufacturer reserves the right to alter or amend the design, model and specification without prior notice. *03070I07078*