EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

TOSHIBA Photocoupler GaAℓAs Ired & Photo-IC

TLP250

Industrial Inverter
Inverter For Air Conditioner
IGBT Gate Drive
Power MOS FET Gate Drive

Unit: mm

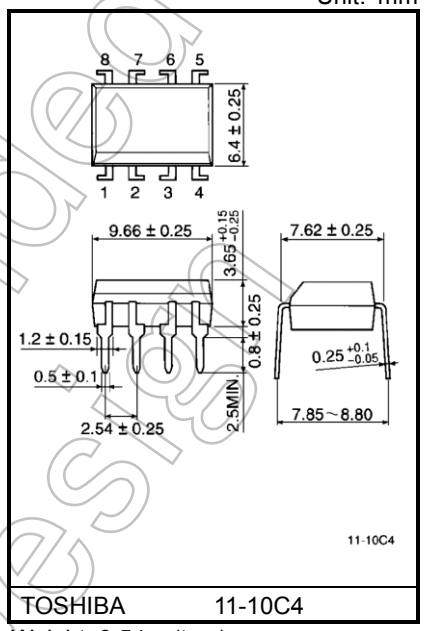

TOSHIBA 11-10C4

Weight: 0.54 g (typ.)

The TOSHIBA TLP250 consists of a GaAlAs light emitting diode and a integrated photodetector.
This unit is 8-lead DIP package.
TLP250 is suitable for gate driving circuit of IGBT or power MOS FET.

- Input threshold current: 5mA(max)
- Supply current : 11mA(max)
- Supply voltage : 10-35V
- Output current : ±1.5A (max)
- Switching time t_{pLH}/t_{pHL}): 0.5μs(max)
- Isolation voltage: 2500V_{rms}(min)
- UL recognized: UL1577, file No.E67349
- c-UL approved : CSA Component Acceptance Service No. 5A, File No.E67349
- Option(D4)
  VDE Approved : EN60747-5- 5
  Note: When a EN60747-5-5 approved type is needed, Please designate "Option(D4)"

Truth Table

		Tr1	Tr2
Input LED	On	On	Off
	Off	Off	On

Schmatic

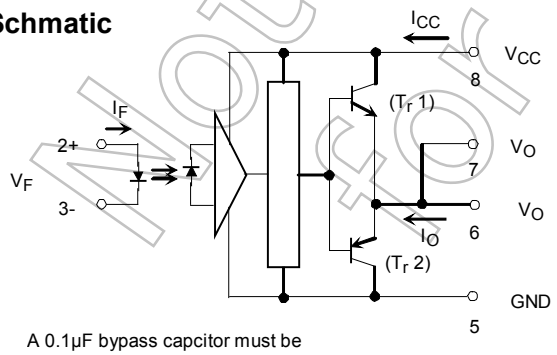

A 0.1μF bypass capcitor must be connected between pin 8 and 5

Pin Configuration (top view)



1 : N.C.
2 : Anode
3 : Cathode
4 : N.C.
5 : GND
6 : V_O (Output)
7 : V_O
8 : V_{CC}

Start of commercial production
1990-11

Not Recommended for New Design

Absolute Maximum Ratings (Ta = 25°C)

Characteristic				Symbol	Rating	Unit
LED	Forward current			I_F	20	mA
	Forward current derating (Ta ≥ 70°C)			ΔI_F / ΔTa	-0.36	mA / °C
	Peak transient forward curent		(Note 1)	I_{FPT}	1	A
	Reverse voltage			V_R	5	V
	Diode power dissipation			P_D	40	mW
	Diode power dissipation derating (Ta≥70°C)			ΔP_D /°C	-0.72	mW / °C
	Junction temperature			Tj	125	°C
Detector	"H"peak output current (P_W ≤ 2.5μs,f ≤ 15kHz)		(Note 2)	I_{OPH}	-1.5	A
	"L"peak output current (P_W ≤ 2.5μs,f ≤ 15kHz)		(Note 2)	I_{OPL}	+1.5	A
	Output voltage	(Ta ≤ 70°C)		V_O	35	V
		(Ta ≤ 85°C)			24	
	Supply voltage	(Ta ≤ 70°C)		V_{CC}	35	V
		(Ta ≤ 85°C)			24	
	Output voltage derating (Ta ≥ 70°C)			ΔV_O / ΔTa	-0.73	V / °C
	Supply voltage derating (Ta ≥ 70°C)			ΔV_{CC} / ΔTa	-0.73	V / °C
	Power dissipation			P_C	800	mW
	Power dissipation derating (Ta ≥ 70°C)			ΔP_C / °C	-14.5	mW / °C
	Junction temperature			Tj	125	°C
Operating frequency			(Note 3)	f	25	kHz
Operating temperature range				T_{opr}	-20 to 85	°C
Storage temperature range				T_{stg}	-55 to 125	°C
Lead soldering temperature (10 s)				T_{sol}	260	°C
Isolation voltage (AC, 60 s., R.H.≤ 60%)			(Note 4)	BV_S	2500	Vrms

Note: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings.
Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook ("Handling Precautions"/"Derating Concept and Methods") and individual reliability data (i.e. reliability test report and estimated failure rate, etc).

Note 1: Pulse width P_W ≤ 1μs, 300pps

Note 2: Exporenential wavefom

Note 3: Exporenential wavefom, I_{OPH} ≤ -1.0A(≤ 2.5μs), I_{OPL} ≤ +1.0A(≤ 2.5μs)

Note 4: Device considerd a two terminal device: Pins 1, 2, 3 and 4 shorted together, and pins 5, 6, 7 and 8 shorted together.

Recommended Operating Conditions

Characteristic	Symbol	Min	Typ.	Max	Unit
Input current, on	$I_{F(ON)}$	7	8	10	mA
Input voltage, off	$V_{F(OFF)}$	0	—	0.8	V
Supply voltage	V_{CC}	15	—	30	V
Peak output current	I_{OPH}/I_{OPL}	—	—	±0.5	A
Operating temperature	T_{opr}	-20	25	85	°C

Note: Recommended operating conditions are given as a design guideline to obtain expected performance of the device. Additionally, each item is an independent guideline respectively. In developing designs using this product, please confirm specified characteristics shown in this document.

Note : A ceramic capacitor(0.1μF) should be connected from pin 8 to pin 5 to stabilize the operation of the high gain linear amplifier. Failure to provide the bypassing may impair the switching proparty. The total lead length between capacitor and coupler should not exceed 1cm.

Note : Input signal rise time(fall time)<0.5μs.

Not Recommended for New Design

Electrical Characteristics (Ta = -20 to 70°C, unless otherwise specified)

Characteristic		Symbol	Test Cir-cuit	Test Condition		Min	Typ.*	Max	Unit
Input forward voltage		V_F	—	I_F = 10 mA, Ta = 25°C		—	1.6	1.8	V
Temperature coefficient of forward voltage		$\Delta V_F / \Delta Ta$	—	I_F = 10 mA		—	-2.0	—	mV / °C
Input reverse current		I_R	—	V_R = 5V, Ta = 25°C		—	—	10	μA
Input capacitance		C_T	—	V = 0 V, f = 1MHz , Ta = 25°C		—	45	250	pF
Output current	"H" level	I_{OPH}	1	V_{CC} = 30V (Note 1)	I_F = 10 mA V_{8-6} = 4V	-0.5	-1.5	—	A
	"L" level	I_{OPL}	2		I_F = 0 mA V_{6-5} = 2.5V	0.5	2	—	
Output voltage	"H" level	V_{OH}	3	V_{CC1} = +15V, V_{EE1} = -15V R_L = 200Ω, I_F = 5mA		11	12.8	—	V
	"L" level	V_{OL}	4	V_{CC1} = +15V, V_{EE1} = -15V R_L = 200Ω, V_F = 0.8V		—	-14.2	-12.5	
Supply current	"H" level	I_{CCH}	—	V_{CC} = 30V, I_F = 10mA Ta = 25°C		—	7	—	mA
				V_{CC} = 30V, I_F = 10mA		—	—	11	
	"L" level	I_{CCL}	—	V_{CC} = 30V, I_F = 0mA Ta = 25°C		—	7.5	—	
				V_{CC} = 30V, I_F = 0mA		—	—	11	
Threshold input current	"Output L→H"	I_{FLH}	—	V_{CC1} = +15V, V_{EE1} = -15V R_L = 200Ω, V_O > 0V		—	1.2	5	mA
Threshold input voltage	"Output H→L"	V_{FHL}	—	V_{CC1} = +15V, V_{EE1} = -15V R_L = 200Ω, V_O < 0V		0.8	—	—	V
Supply voltage		V_{CC}	—	—		10	—	35	V
Capacitance (input-output)		C_S	—	V_S = 0 V, f = 1MHz Ta = 25°C		—	1.0	2.0	pF
Resistance(input-output)		R_S	—	V_S = 500V , Ta = 25°C R.H.≤ 60%		1×10^{12}	10^{14}	—	Ω

* All typical values are at Ta = 25°C

Note 1: Duration of I_O time ≤ 50μs

Not Recommended for New Design

Switching Characteristics (Ta = -20 to 70°C, unless otherwise specified)

Characteristic		Symbol	Test Circuit	Test Condition	Min	Typ.	Max	Unit
Propagation delay time	L→H	t_{pLH}	5	I_F = 8mA V_{CC1} = +15V, V_{EE1} = -15V R_L = 200Ω	—	0.15	0.5	μs
	H→L	t_{pHL}			—	0.15	0.5	
Common mode transient immunity at high level output		CM_H	6	V_{CM} = 600V, I_F = 8mA V_{CC} = 30V, Ta = 25°C	-5000	—	—	V / μs
Common mode transient immunity at low level output		CM_L		V_{CM} = 600V, I_F = 0mA V_{CC} = 30V, Ta = 25°C	5000	—	—	V / μs

Note: All typical values are at Ta = 25°C

Test Circuit 1 : I_{OPH}

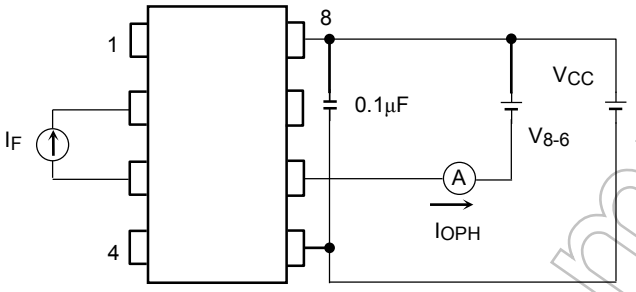

Test Circuit 2 : I_{OPL}

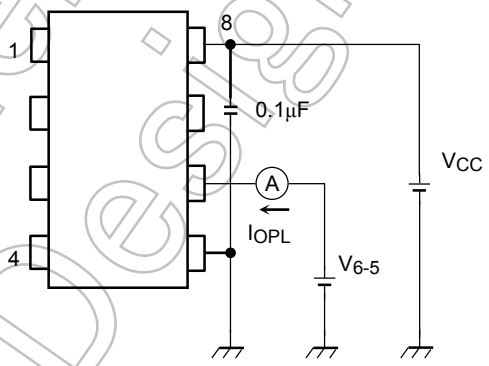

Test Circuit 3 : V_{OH}

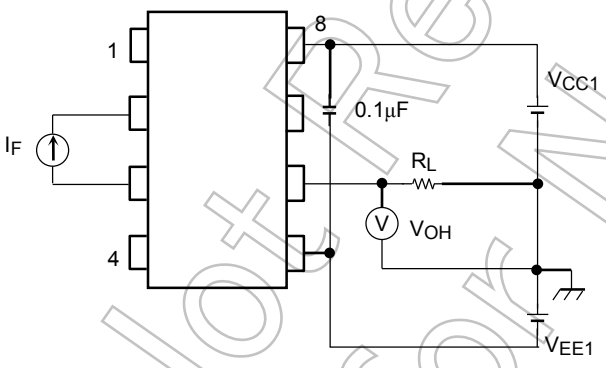

Test Circuit 4 : V_{OL}

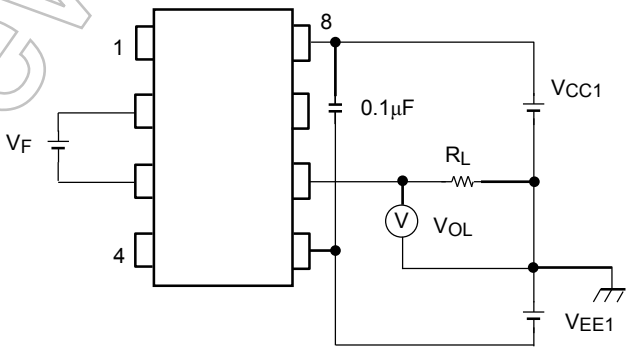

Not Recommended for New Design

Test Circuit 5: t_{pLH}, t_{pHL}, t_r t_f

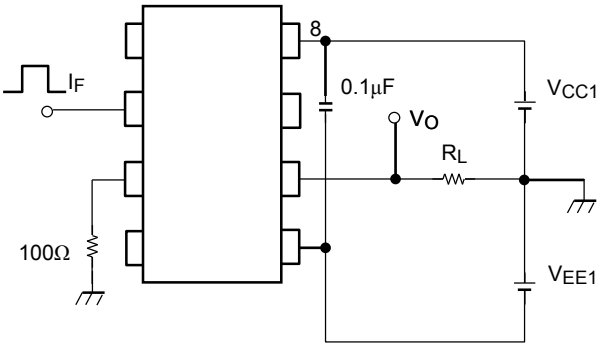

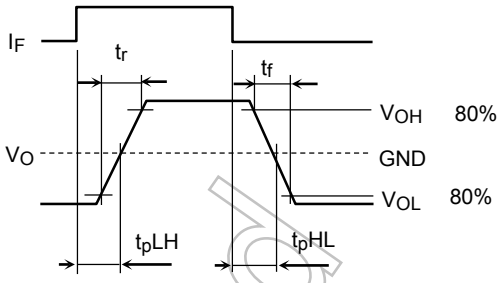

Test Circuit 6: CM_H, CM_L

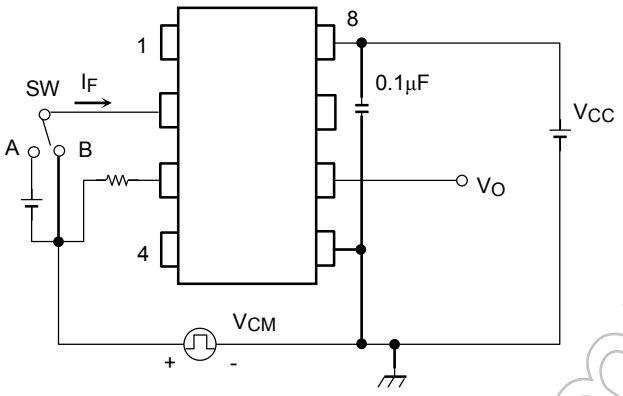

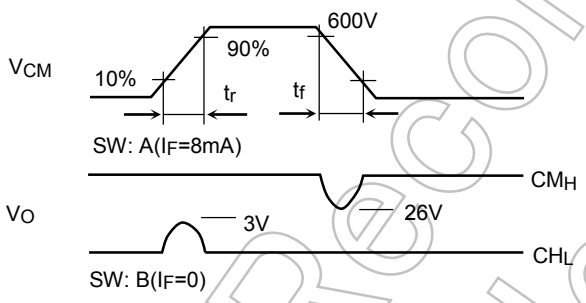

$$CM_L = \frac{480\ (V)}{t_{r\ (\mu s)}}$$

$$CM_H = \frac{480\ (V)}{t_{f\ (\mu s)}}$$

CM_L(CM_H) is the maximum rate of rise (fall) of the common mode voltage that can be sustained with the output voltage in the low (high) state.

Not Recommended for New Design

$I_F - V_F$

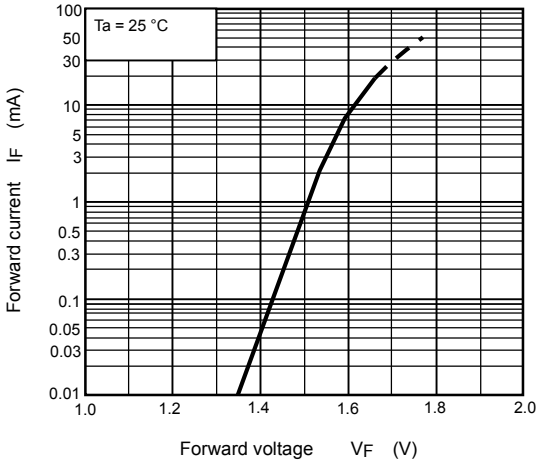

$\Delta V_F / \Delta Ta - I_F$

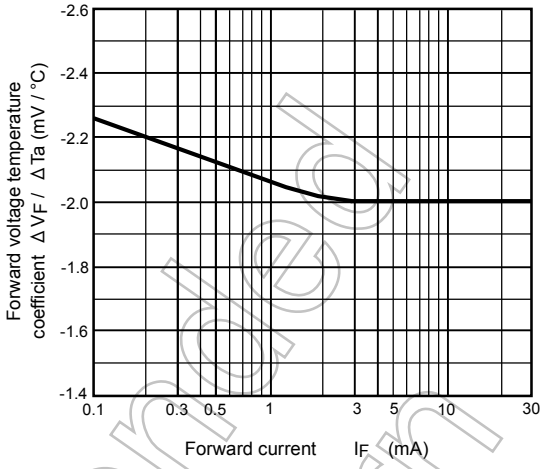

$I_F - Ta$

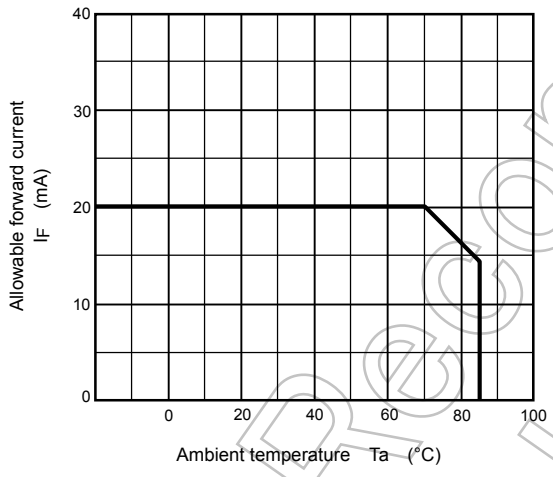

$V_{CC} - Ta$

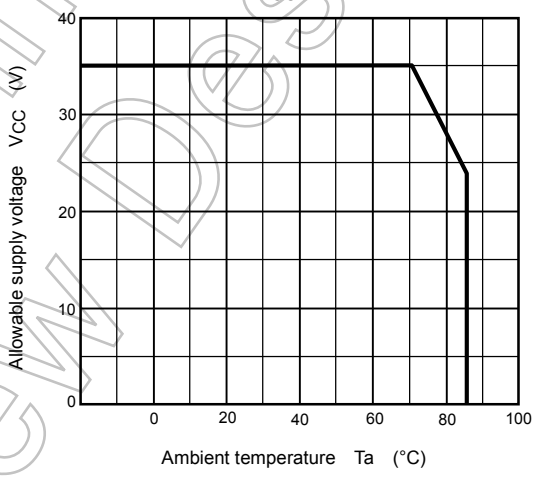

$I_{OPH}, I_{OPL} - Ta$

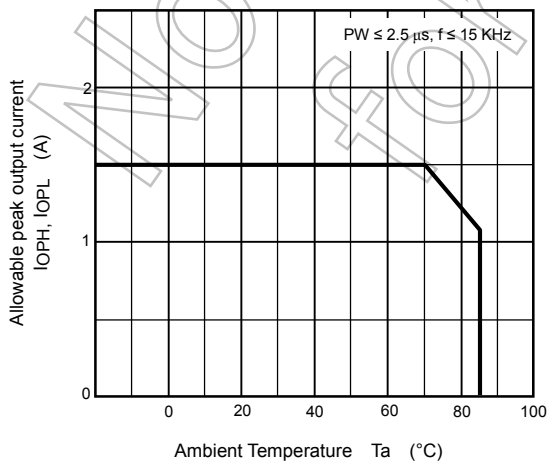

Not Recommended for New Design

RESTRICTIONS ON PRODUCT USE

- Toshiba Corporation, and its subsidiaries and affiliates (collectively "TOSHIBA"), reserve the right to make changes to the information in this document, and related hardware, software and systems (collectively "Product") without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- **PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT ("UNINTENDED USE").** Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, devices related to electric power, and equipment used in finance-related fields. **IF YOU USE PRODUCT FOR UNINTENDED USE, TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT.** For details, please contact your TOSHIBA sales representative.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- GaAs (Gallium Arsenide) is used in Product. GaAs is harmful to humans if consumed or absorbed, whether in the form of dust or vapor. Handle with care and do not break, cut, crush, grind, dissolve chemically or otherwise expose GaAs in Product.
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. **TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS.**

Not Recommended for New Design