



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

» Features

- Precise design terminal type adequate for DIP IC pitch size (multiple of 2.54mm).
- Epoxy sealing treatment, free of flux entry.
- Several LED colors options.
- Several cap legends options.
- Customized cap and legend are available.



» Applications

- Operating switches in all types of electronic equipment such as audio apparatus, office equipment, communications apparatus, TV sets, VCRs, etc.

» Specifications

Rating	0.1A 30VDC
Insulation Resistance	100MΩ Min (at 500 VDC)
Dielectric Strength	AC 500V (50/60 Hz for 1 minute)
Contact Resistance	50mΩ Max. (Initial)
Electrically Life	10,000 Cycles Min
Ambient Temperature	-10°C~ +80°C
Operating Force	150 ± 100gf (Momentary)
	250 ± 100gf (Alternate)
	200 ± 100gf (Momentary With Click)

» LED Specifications

Color	VR	IF	Recommended Operating Current	VF	
				Nor	Max
Red	DC 5V	20mA	20mA	1.7V	2.4V
Green	DC 5V	20mA	20mA	1.9V	2.4V
Yellow	DC 5V	20mA	20mA	1.9V	2.4V
Blue	DC 5V	20mA	20mA	3.0V	3.6V
White	DC 5V	20mA	20mA	3.0V	3.6V

For the specification about the other LEDs, please contact with sales department


» Product selection


PB 613

BUTTON TYPE		FUNCTION		LED		LED BRIGHTNESS		LASER ETCHING	
1F		A	Alternate	-	Non-LED	-	Standard	01	
2F		B	Momentary	L	LED	C	High Brightness	02	
3F		C	Momentary with click					03	OK
4F								04	
5F								05	
6F								06	
01								07	
02								08	
03								09	
04								10	
05									
07									
FRAME		LED COLOR		CAP COLOR					
-	Without	1	Red	1	Misty Silver				
F	With frame	2	Yellow	2	Bright Silver				
		3	Green	3	Gold				
		4	Blue	4	White				
		5	White	5	Bright Black				
		6	Pure Green	6	Red				
		8	Amber	7	Misty Black				
		9	Blue Green	8	Sky blue				
		10	Pink	9	Gunmetal black				
		011	Purple	A	Orange				
		12	Red/Yellow						
		13	Red/Green						
		14	Red/Blue						
		23	Yellow/Green						
		48	Blue/Amber						
		52	White/Yellow						
		58	White/Amber						
		-	Non-LED						

Please inquire about the details with our sales representative.

» Circuit

Type	Switch Action		
PB613A	Normal ON	Push to lock ON	
Connecting Terminal	1 - 2 4 - 5	2 - 3 5 - 6	
PB613B	Normal ON	Push (ON)	
Connecting Terminal	1 - 2 4 - 5	2 - 3 5 - 6	
LED Circuit			

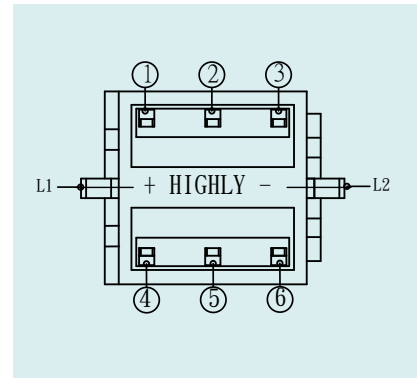



» Operating characteristics

Unit: mm



Dimensions

P.C.B Layout



PB6131F □ L

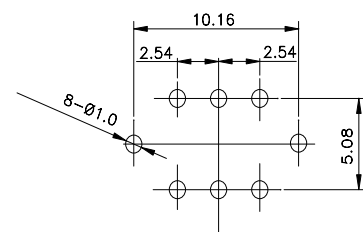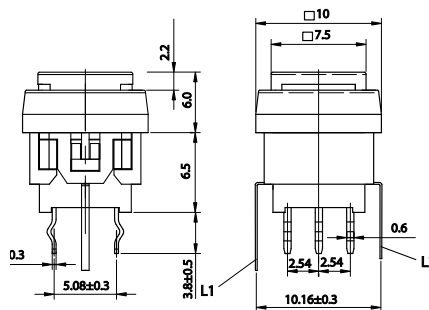

PB6132F □ L

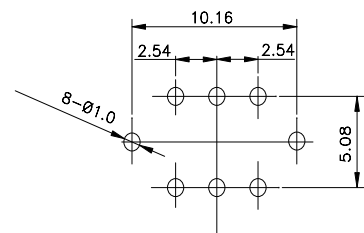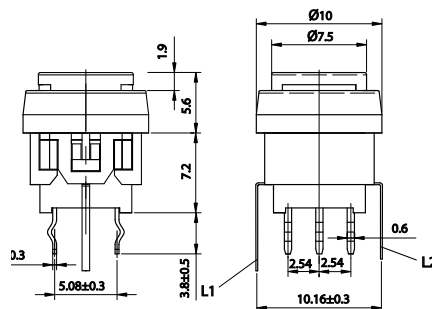

PB6133F □ L

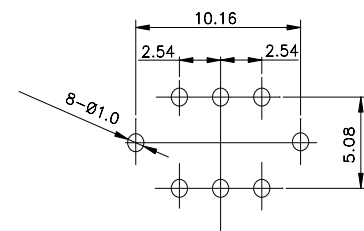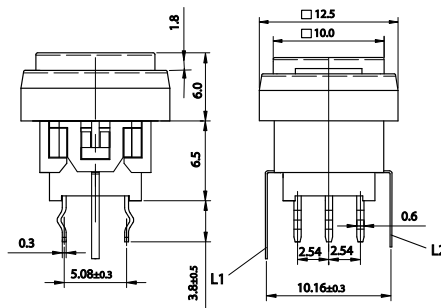



» Operating characteristics

Unit: mm



Dimensions

P.C.B Layout



PB6134F ☐ L

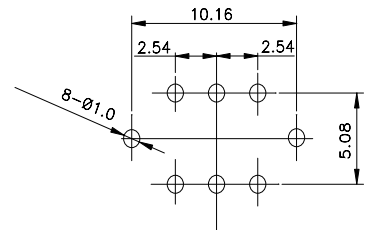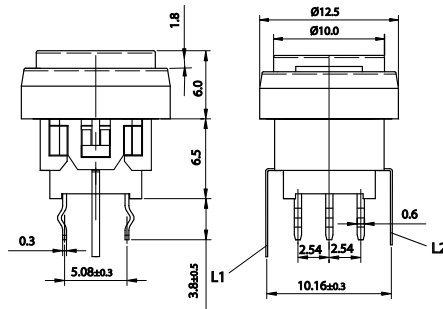



PB6135F ☐ L

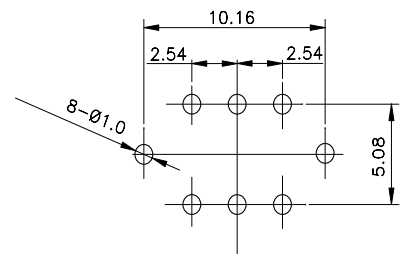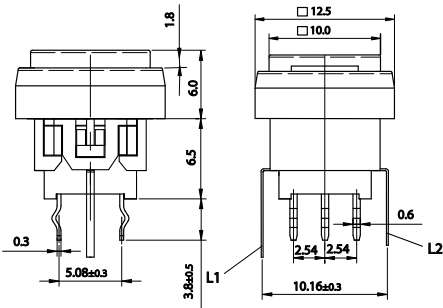

PB6136F ☐ L

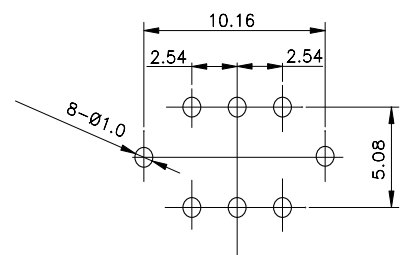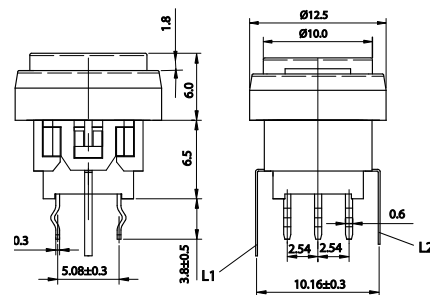

PB61301 ☐ L

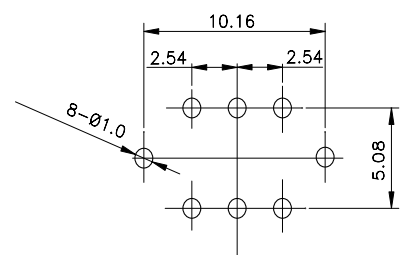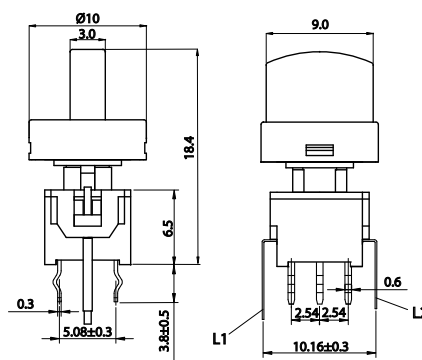



» Operating characteristics

Unit: mm



Dimensions

P.C.B Layout



PB61302 □ L

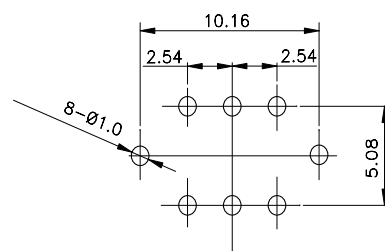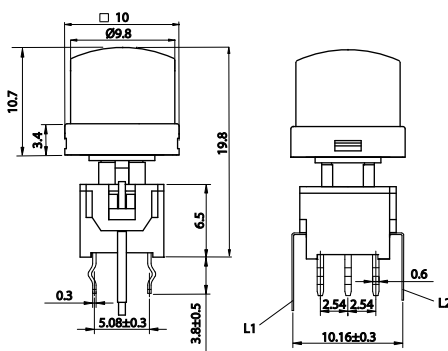



PB61303 □ L

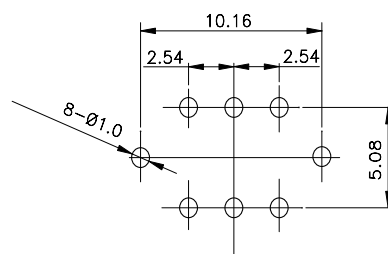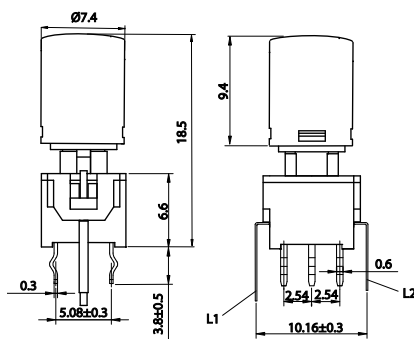

PB61304 □ L

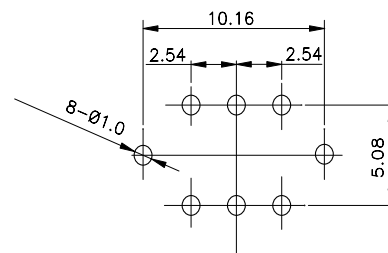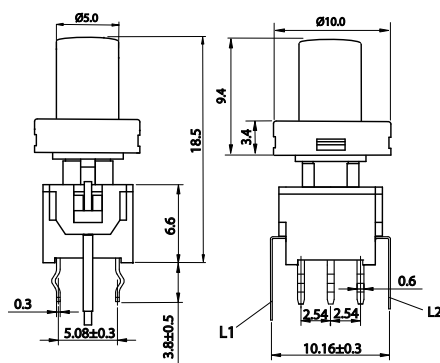

PB61305 □ L

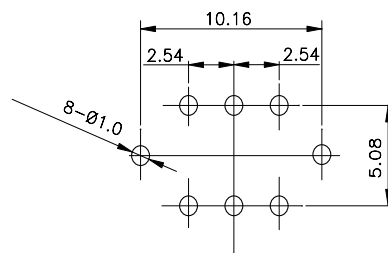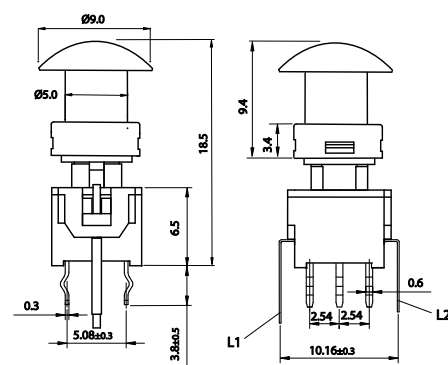



» Operating characteristics

Unit: mm



Dimensions

P.C.B Layout

PB61307 ☐ L

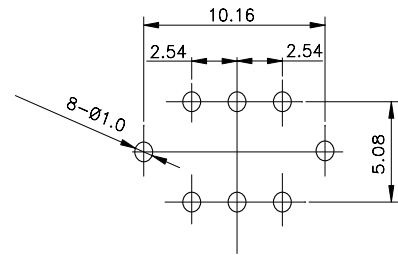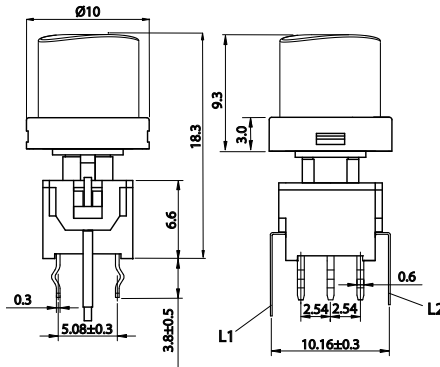

PB6131 ☐ F2L

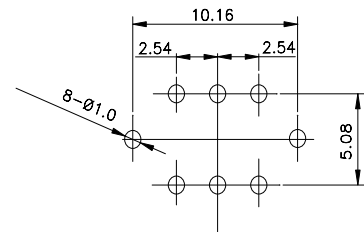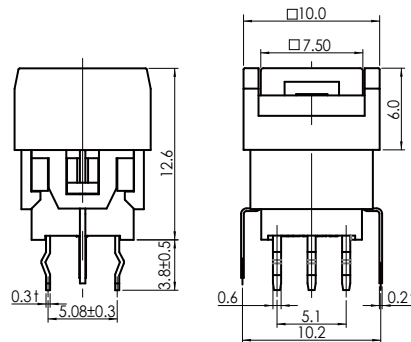

» Features

- New design-double layer illuminated push switch.
- Sharp "click" feeling with positive reliability feedback.
- Epoxy sealing treatment, free of flux entry.
- Several LED colors options.
- Side-actuated with right angle terminal.
- Several cap legends options.



» Applications

- Operating switches in all types of electronic equipment such as audio apparatus, office equipment, communications apparatus, TV sets, VCRs, etc.

» Specifications

Rating	0.1A 30VDC
Insulation Resistance	100MΩ Min (at 500 VDC)
Dielectric Strength	AC 500V (50/60 Hz for 1 minute)
Contact Resistance	50mΩ Max. (Initial)
Electrically Life	10,000 Cycles Min
Ambient Temperature	-10°C~ +80°C
Operating Force	150 ± 100gf (Momentary)
	250 ± 100gf (Alternate)
	200 ± 100gf (Momentary With Click)

» LED Specifications

Color	VR	IF	Recommended Operating Current	VF	
				Nor	Max
Red	DC 5V	20mA	20mA	1.7V	2.4V
Green	DC 5V	20mA	20mA	1.9V	2.4V
Yellow	DC 5V	20mA	20mA	1.9V	2.4V
Blue	DC 5V	20mA	20mA	3.0V	3.6V
White	DC 5V	20mA	20mA	3.0V	3.6V

For the specification about the other LEDs, please contact with sales department

» Product selection

PB 6131

RFIL -

UPPER	LOWER
FUNCTION	
A	Alternate
B	Momentary with click

UPPER	LOWER
LED COLOR	
1	Red
2	Yellow
3	Green
4	Blue
5	White
6	Pure Green
8	Amber
9	Blue Green
10	Pink
011	Purple
12	Red/Yellow
13	Red/Green
14	Red/Blue
23	Yellow/Green
48	Blue/Amber
52	White/Yellow
58	White/Amber
-	Non-LED

UPPER CAP COLOR	
1	Misty Silver
2	Bright Silver
3	Gold
4	White
5	Bright Black
6	Red
7	Misty Black
8	Sky blue
9	Gunmetal black
A	Orange

LOWER CAP COLOR	
1	Misty Silver
2	Bright Silver
3	Gold
4	White
5	Bright Black
6	Red
7	Misty Black
8	Sky blue
9	Gunmetal black
A	Orange


UPPER LASER ETCHING			
01	⏻	06	⬆
02	○	07	⬇
03	OK	08	⊙
04	⇒	09	⦿
05	⇐	10	▲


Please inquire about the details with our sales representative.

LOWER LASER ETCHING			
01	⏻	06	⬆
02	○	07	⬇
03	OK	08	⊙
04	⇒	09	⦿
05	⇐	10	▲

Please inquire about the details with our sales representative.

» Circuit

Type	Switch Action	
PB613A	Normal ON	Push to lock ON
Connecting Terminal	1 - 2 4 - 5	2 - 3 5 - 6
PB613B	Normal ON	Push (ON)
Connecting Terminal	1 - 2 4 - 5	2 - 3 5 - 6
LED Circuit		


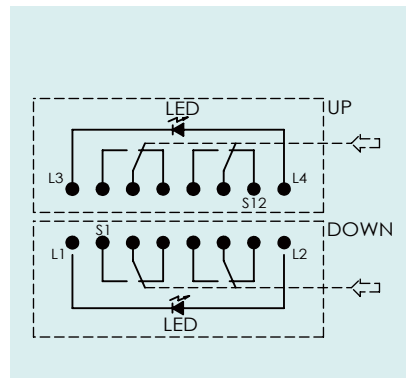


» Operating characteristics

Unit: mm

Dimensions

P.C.B Layout

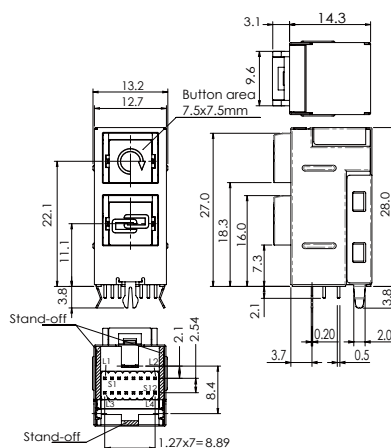PB6131 RFIL-33-577-5170

» Features

- Epoxy sealing treatment, free of flux entry.
- Several LED colors options.
- Side-actuated with right angle terminal.
- Several cap legends options.



» Applications

- Operating switches in all types of electronic equipment such as audio apparatus, office equipment, communications apparatus, TV sets, VCRs, etc.

» Specifications

Rating	0.1A 30VDC
Insulation Resistance	100MΩ Min (at 500 VDC)
Dielectric Strength	AC 500V (50/60 Hz for 1 minute)
Contact Resistance	50mΩ Max. (Initial)
Electrically Life	10,000 Cycles Min
Ambient Temperature	-10°C~ +80°C
Operating Force	150 ± 100gf (Momentary)
	250 ± 100gf (Alternate)
	200 ± 100gf (Momentary With Click)

» LED Specifications

Color	VR	IF	Recommended Operating Current	VF	
				Nor	Max
Red	DC 5V	20mA	20mA	1.7V	2.4V
Green	DC 5V	20mA	20mA	1.9V	2.4V
Yellow	DC 5V	20mA	20mA	1.9V	2.4V
Blue	DC 5V	20mA	20mA	3.0V	3.6V
White	DC 5V	20mA	20mA	3.0V	3.6V

For the specification about the other LEDs, please contact with sales department


» Product selection


PB 613

BUTTON TYPE		FUNCTION		LED		LED BRIGHTNESS		SUPPORT PIN		LASER ETCHING	
1		A	Alternate	-	Non-LED	-	Standard	-	Without	01	
2		B	Momentary with click	L	LED	C	High Brightness	WS		02	
3								WS2		03	OK
4										04	
5										05	
6										06	
01										07	
02										08	
03										09	
04										10	
05											
07											

Please inquire about the details with our sales representative.

» Circuit

Type	Switch Action	
PB613 ARF	Normal ON	Push to lock ON
Connecting Terminal	1 - 2 4 - 5	2 - 3 5 - 6
PB613 BRF	Normal ON	Push (ON)
Connecting Terminal	1 - 2 4 - 5	2 - 3 5 - 6
LED Circuit		

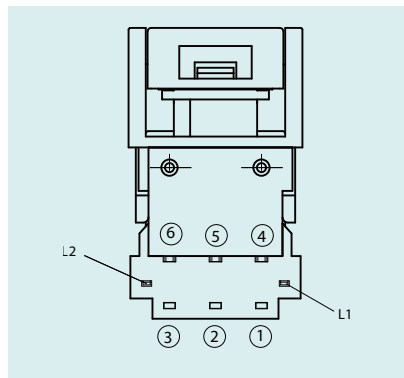



» Operating characteristics

Unit: mm



Dimensions

P.C.B Layout

PB6131 RFIL-3-177

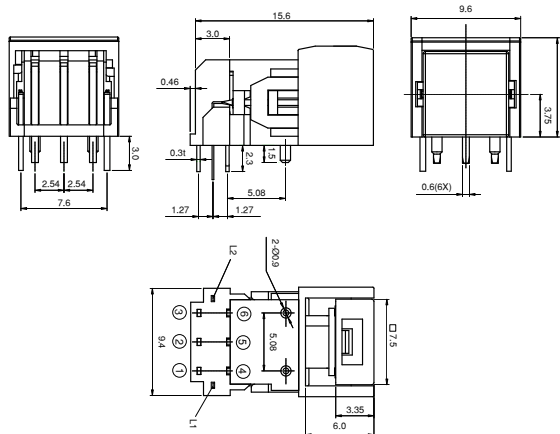

PB6131 RFGL-3-177

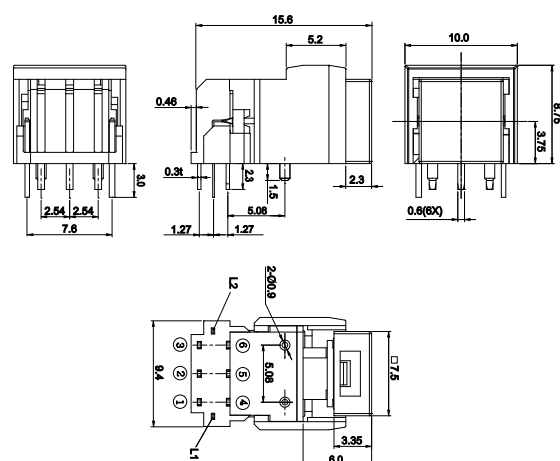



» Operating characteristics

Unit: mm

Dimensions

P.C.B Layout

PB6131 □ RFJL-4-WS-5195

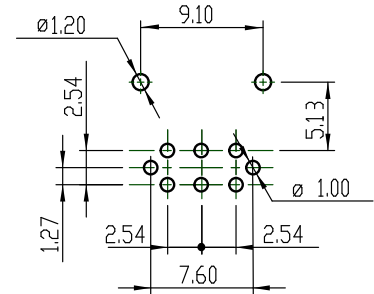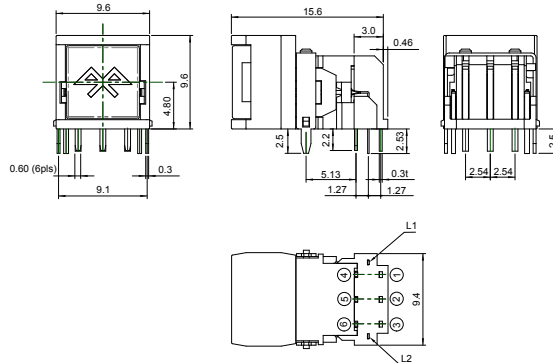

PB6131 □ RFI L-4-WS2-5238

