EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.


SGS-THOMSON MICROELECTRONICS

TBA820M

1.2W AUDIO AMPLIFIER

DESCRIPTION

The TBA820M is a monolithic integrated audio amplifier in a 8 lead dual in-line plastic package. It is intended for use as low frequency class B power amplifier with wide range of supply voltage: 3 to 16V, in portable radios, cassette recorders and players etc. Main features are: minimum working supply voltage of 3V, low quiescent current, low number of external components, good ripple rejection, no cross-over distortion, low power dissipation.
Output power: P_o = 2W at 12V/8Ω, 1.6W at 9V/4Ω and 1.2W at 9V/8Ω.



Minidip

ORDERING NUMBER: TBA820M

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_s	Supply voltage	16	V
I_o	Output peak current	1.5	A
P_{tot}	Power dissipation at T_{amb} = 50°C	1	W
T_{stg}, T_j	Storage and junction temperature	-40 to 150	°C

TEST AND APPLICATION CIRCUITS

Figure 1. Circuit diagram with load connected to the supply voltage



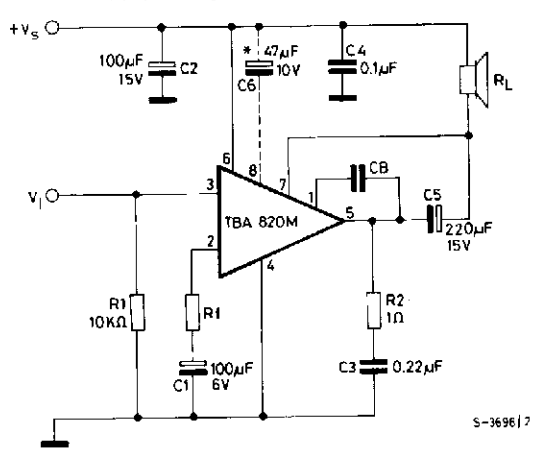


Figure 2. Circuit diagram with load connected to ground

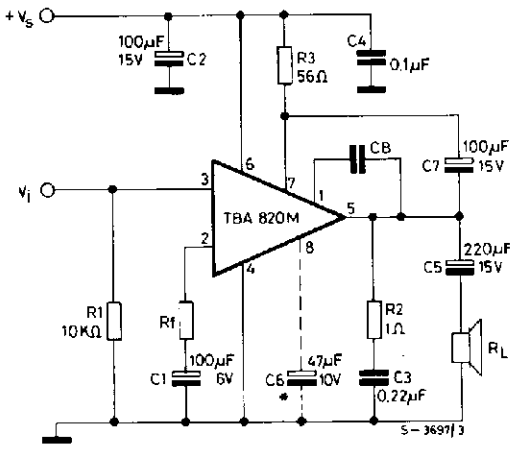


* Capacitor C6 must be used when high ripple rejection is requested.

PIN CONNECTION (top view)

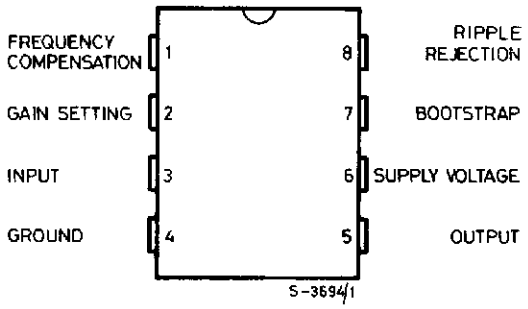

SCHEMATIC DIAGRAM

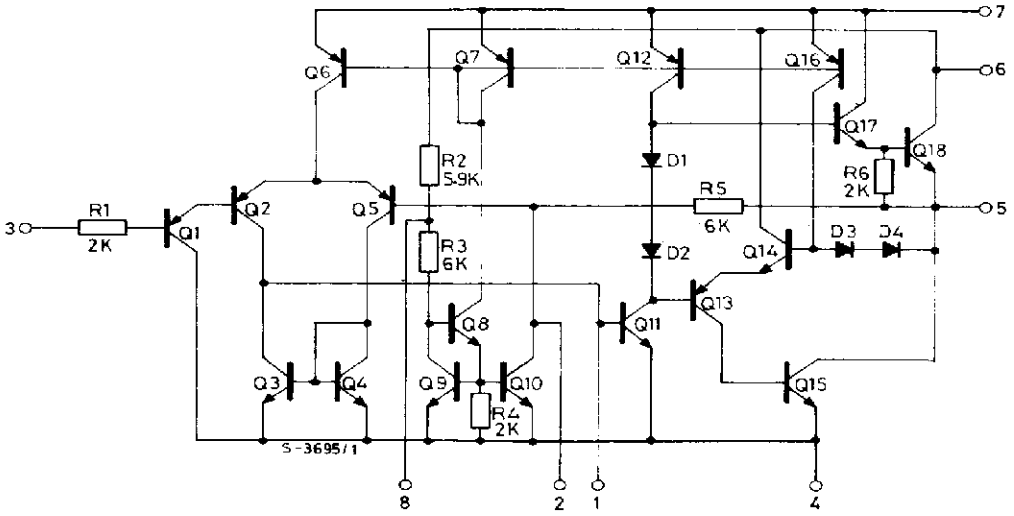

THERMAL DATA

Symbol	Parameter		Value	Unit
$R_{th\text{-}j\text{-}amb}$	Thermal resistance junction-ambient	max	100	°C/W

ELECTRICAL CHARACTERISTICS (Refer to the test circuits Vs = 9V, T_{amb} = 25 °C unless otherwise specified)

Symbol	Parameter	Test conditions		Min.	Typ.	Max.	Unit
V_s	Supply voltage			3		16	V
V_o	Quiescent output voltage (pin 5)			4	4.5	5	V
I_d	Quiescent drain current				4	12	mA
I_b	Bias current (pin 3)				0.1		µA
P_o	Output power	d = 10% R_f = 120Ω V_s = 12V V_s = 9V V_s = 9V V_s = 6V V_s = 3.5V	f = 1 kHz R_L = 8Ω R_L = 4Ω R_L = 8Ω R_L = 4Ω R_L = 4Ω	0.9	2 1.6 1.2 0.75 0.25		W W W W W
Ri	Input resistance (pin 3)	f = 1 kHz			5		MΩ
B	Frequency response (-3 dB)	R_L = 8Ω C_5 = 1000 µF R_f = 120Ω	C_B = 680 pF	25 to 7,000			Hz
			C_B = 220 pF	25 to 20,000			
d	Distortion	P_o = 500 mW R_L = 8Ω f = 1 kHz	R_f = 33Ω		0.8		%
			R_f = 120Ω		0.4		
G_v	Voltage gain (open loop)	f = 1 kHz	R_L = 8Ω		75		dB
G_v	Voltage gain (closed loop)	R_L = 8Ω	R_f = 33Ω		45		dB
		f = 1 kHz	R_f = 120Ω		34		
e_N	Input noise voltage (*)				3		µV
i_N	Input noise current (*)				0.4		nA
$\frac{S+N}{N}$	Signal to noise ratio (*)	P_o = 1.2W R_L = 8Ω G_v = 34 dB	R1 = 10KΩ		80		dB
			R1 = 50 kΩ		70		
SVR	Supply voltage rejection (test circuit of fig. 2)	R_L = 8Ω $f_{(ripple)}$ = 100 Hz C6 = 47 µF R_f = 120Ω			42		dB

(*) B = 22 Hz to 22 KHz

Figure 3. Output power vs. supply voltage

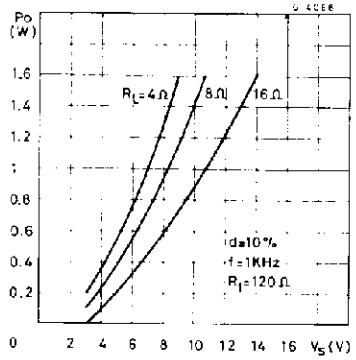


Figure 4. Harmonic distortion vs. output power

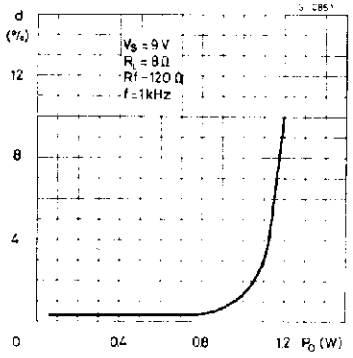


Figure 5. Power dissipation and efficiency vs. output power

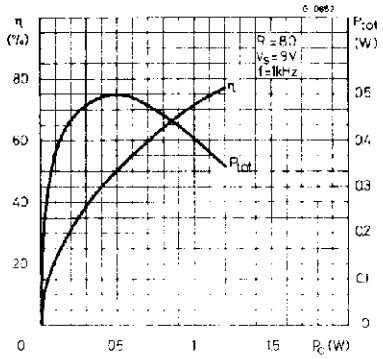


Figure 6. Maximum power dissipation (sine wave operation)

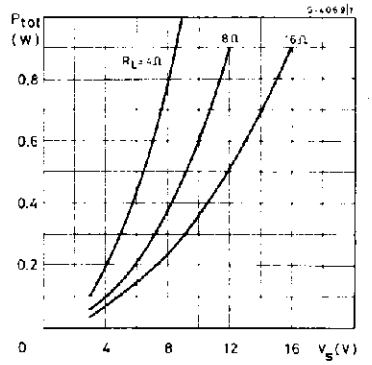


Figure 7. Suggested value of C_B vs. R_f

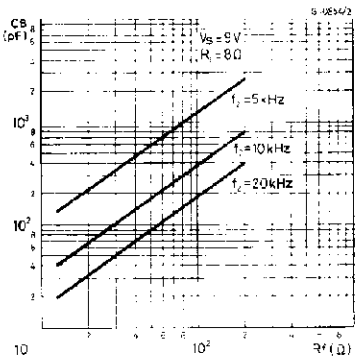


Figure 8. Frequency response

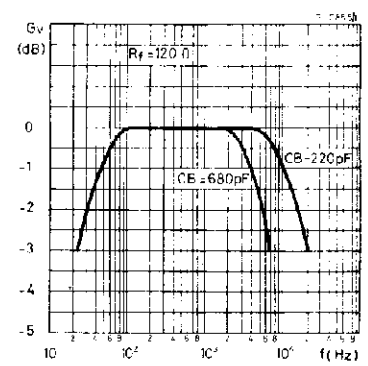


Figure 9. Harmonic distortion vs. frequency

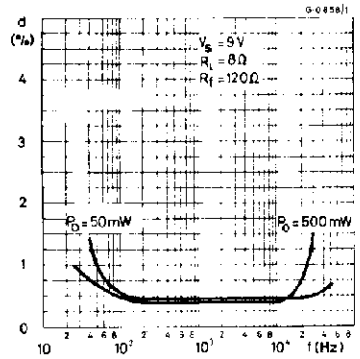


Figure 10. Supply voltage rejection (Fig. 2 circuit)



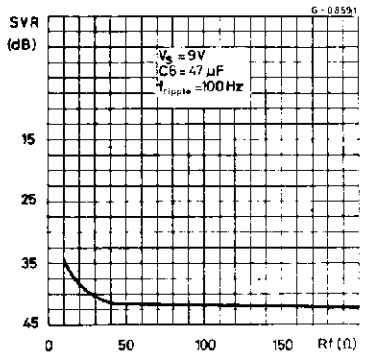


Figure 11. Quiescent current vs. supply voltage

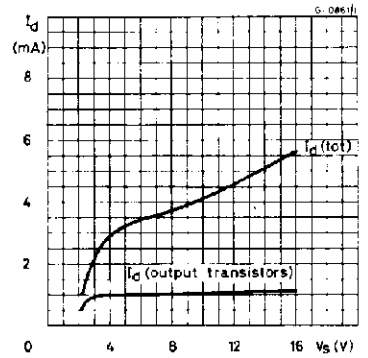

MINIDIP PACKAGE MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A		3.32			0.131	
a1	0.51			0.020		
B	1.15		1.65	0.045		0.065
b	0.356		0.55	0.014		0.022
b1	0.204		0.304	0.008		0.012
D			10.92			0.430
E	7.95		9.75	0.313		0.384
e		2.54			0.100	
e3		7.62			0.300	
e4		7.62			0.300	
F			6.6			0.260
I			5.08			0.200
L	3.18		3.81	0.125		0.150
Z			1.52			0.060

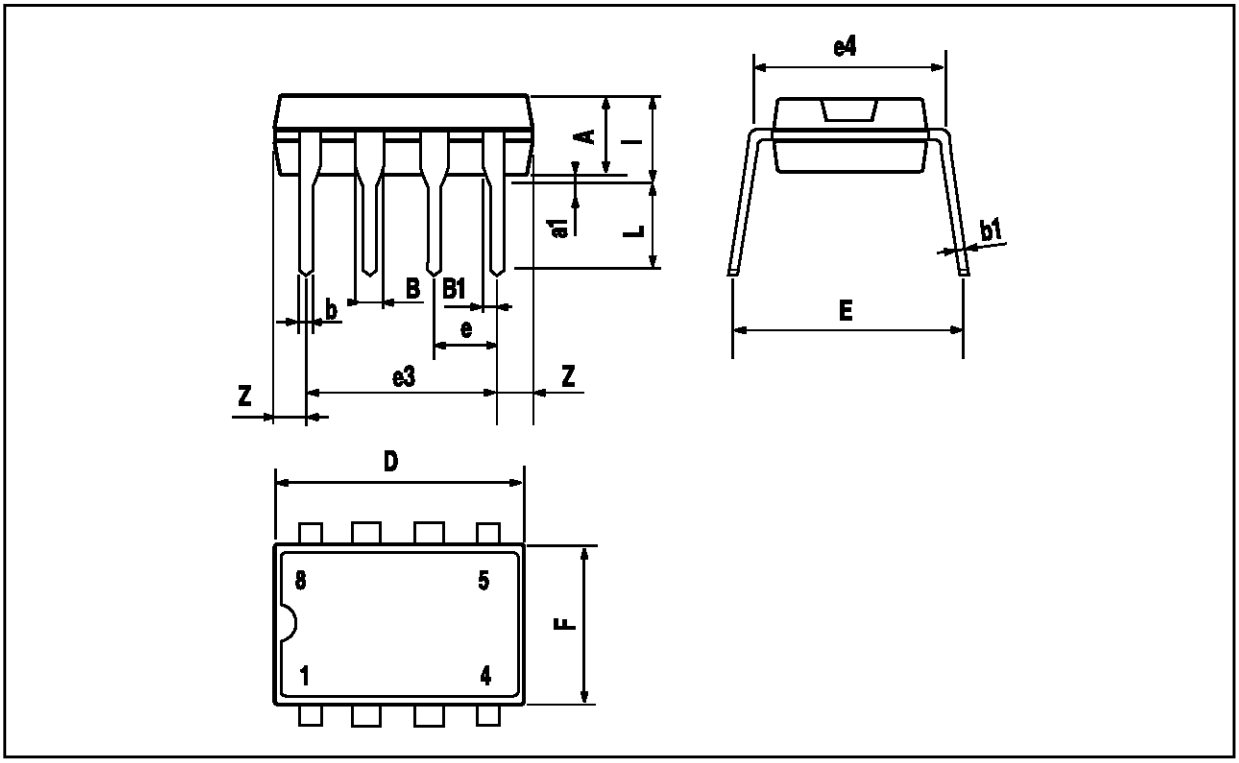

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1994 SGS-THOMSON Microelectronics - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES
Australia - Brazil - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thaliand - United Kingdom - U.S.A.