




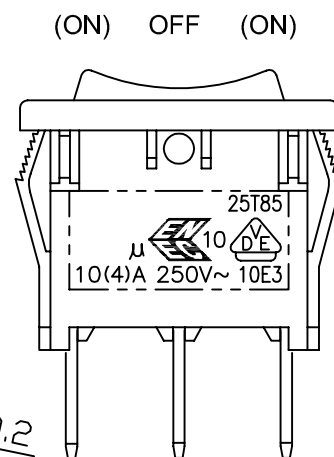


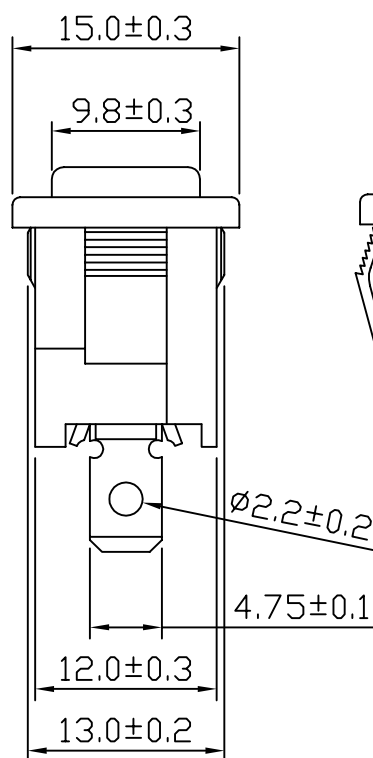

EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

Rating	16A 125VAC 1/3HP 10A 250VAC 1/2HP	 	Mounting Hole		Circuit Diagram	
	10(4)A 250V~ 10E3					
	10A 125VAC, 6A 250VAC CQC					
Contact Resistance	50m ohm Max.					
Insulation Resistance	DC 500V 100M ohm Min.					
Dielectric Strength	AC 1500V 1 minute					
Operation Temperature	-25° C~85° C		Thickness	X	Y	
Switch Function	3P SPDT (ON)-OFF-(ON)		0.75...1.25	19.2-0.1	13.2+0.1	
			1.25...2	19.4-0.1	13.2+0.1	
			2...3	19.8-0.1	13.2+0.1	

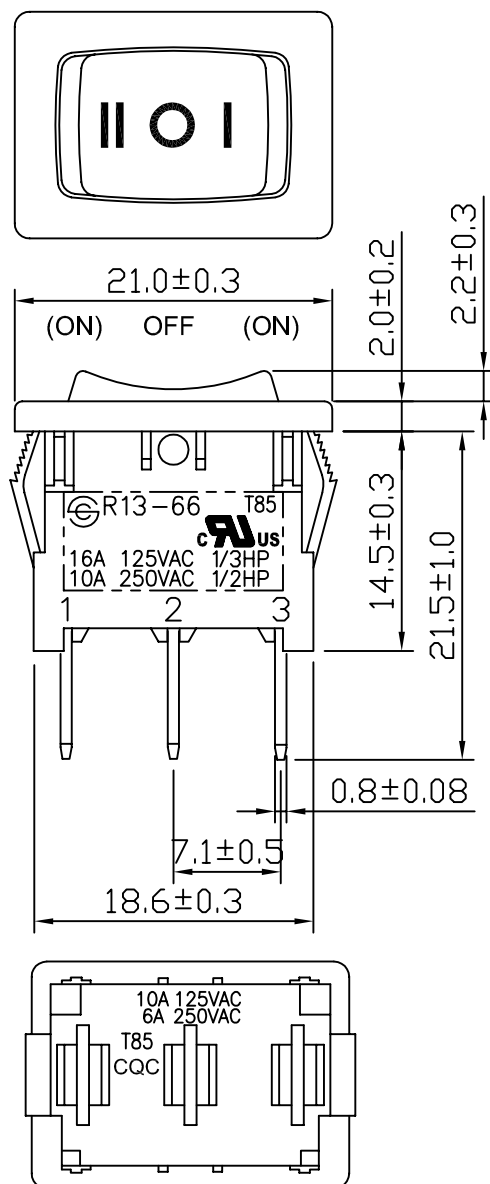

Material:
Frame: Nylon#66, Black
Actuator: Nylon#66, Black
Printed: None

C8\R13\R13-66H-02(1822761)_1

11/17/'10	曹 盈 芳	本體刻字更新, 重新出圖				△
Date	Name	Description				NO
Drawn	Checked	Approved	SCI BOM NO.	1822761	Model Name	ROCKER SWITCH
曹 盈 芳		王 佰 山	Customer No.		Model No.	R13-66I-02
11/17/'10		11/19/'10	Unit	mm	Shin Chin Industrial Co., Ltd.	
						Rev. 1