EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

MET-200 SURFACE MOUNT CONTACTS

****MET-202C AR-WP18 (Water Resistant - SPDT)**

2"L×.74"W×.37"H Surface Mount Armored Commercial Type W/Wire Leads or Armored Cable



CE

RoHS

c UL US LISTED

Contact Size: 2"L×.74"W×.37"H
(51mm×18.8mm×9.5mm)

Standard Magnet Size: 2"L×.74"W×.37"H
(51mm×18.8mm×9.5mm)

Standard Gap: 1.25"(32mm)

Colors: Aluminum Case

18"(458mm) Armor Cable Standard (MET-200AR)

36"(915mm) Armor Cable Available (MET-200AR 36")

12"(305mm) 22AWG Leads Standard (MET-200)

Specifications


	Part Number	Gap Inch(mm)	Loop Open/Closed	Reed Form	Max. Contact Rating (W)	Max. Initial Contact Resistance (mΩ)	Max. Switching Voltage (V)	Max. Switching Current (A)
	MET-200	1.25"(32)	CLOSED	Normally Open	10	100	AC110/DC100	0.5
	MET-200 AR	1.25"(32)	CLOSED	Normally Open	10	100	AC110/DC100	0.5
	MET-201B	1.18"(30)	OPEN	Normally Closed	3	100	AC30/DC30	0.2
	MET-201B AR	1.18"(30)	OPEN	Normally Closed	3	100	AC30/DC30	0.2
	MET-202C	1.18"(30)	SPDT	SPDT	3	100	AC30/DC30	0.2
	MET-202C AR	1.18"(30)	SPDT	SPDT	3	100	AC30/DC30	0.2
**	**MET-202C AR -WP18**	1.18"(30)	SPDT	SPDT	3	100	AC30/DC30	0.2

OPERATING TEMPERATURE:-40°C to +60°C

Outline Dimensions

Unit: inch(mm)

MET-200 AR/MET-201B AR

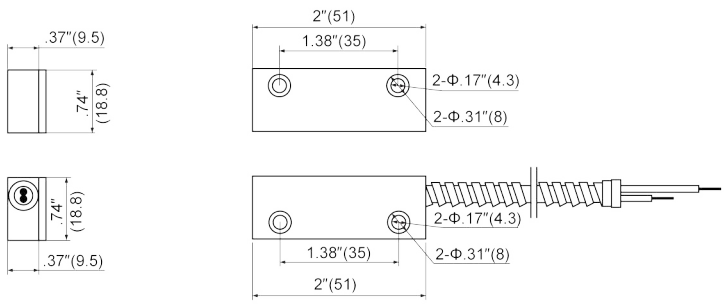

"We Contact The World"®

The Best Product Guarantee since 1984®

TANE ALARM PRODUCTS

906 JERICHO TURNPIKE, NEW HYDE PARK, NY 11040
Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125
www.tanealarm.com • E-MAIL: info@tanealarm.com

MET-200


SURFACE MOUNT CONTACTS


Outline Dimensions


Unit: inch(mm)


MET-200/MET-201B











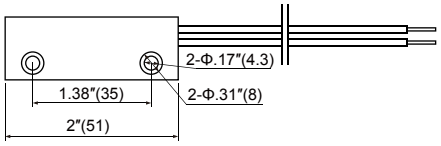


MET-202C AR














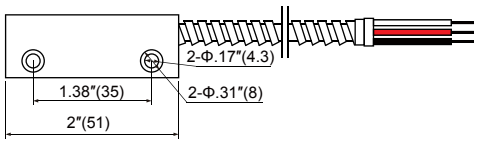


MET-202C












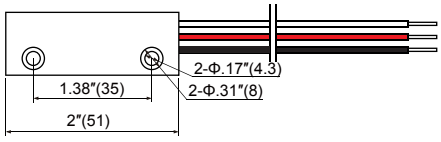

MET-202C & MET-202C AR Wiring Diagram

