



HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

MET-200

SURFACE MOUNT CONTACTS

**MET-202C AR-WP18 DW W

2"Lx.74"Wx.37"H Surface Mount Armored Commercial Type W/Wire Leads or Armored Cable



Contact Size: 2"Lx.74"Wx.37"H

(51mmx18.8mmx9.5mm)

Standard Magnet Size: 2"Lx.74"Wx.37"H

(51mmx18.8mmx9.5mm)

Standard Gap: 1.25"(32mm)

Colors: Aluminum Case

18"(458mm) Armor Cable Standard (MET-200AR)

36"(915mm) Armor Cable Available (MET-200AR 36")

12"(305mm) 22AWG Leads Standard (MET-200)

Specifications


Part Number	Gap Inch(mm)	Loop Open/Closed	Reed Form	Max. Contact Rating (W)	Max. Initial Contact Resistance (mΩ)	Max. Switching Voltage (V)	Max. Switching Current (A)
MET-200	1.25"(32)	CLOSED	Normally Open	10	100	AC110/DC100	0.5
MET-200 AR	1.25"(32)	CLOSED	Normally Open	10	100	AC110/DC100	0.5
MET-201B	1.18"(30)	OPEN	Normally Closed	3	100	AC30/DC30	0.2
MET-201B AR	1.18"(30)	OPEN	Normally Closed	3	100	AC30/DC30	0.2
MET-202C	1.18"(30)	SPDT	SPDT	3	100	AC30/DC30	0.2
MET-202C AR	1.18"(30)	SPDT	SPDT	3	100	AC30/DC30	0.2
**MET-202C AR -WP18	1.18"(30)	SPDT	SPDT	3	100	AC30/DC30	0.2

OPERATING TEMPERATURE:-40°C to +60°C

Outline Dimensions

Unit: inch(mm)

MET-200 AR/MET-201B AR

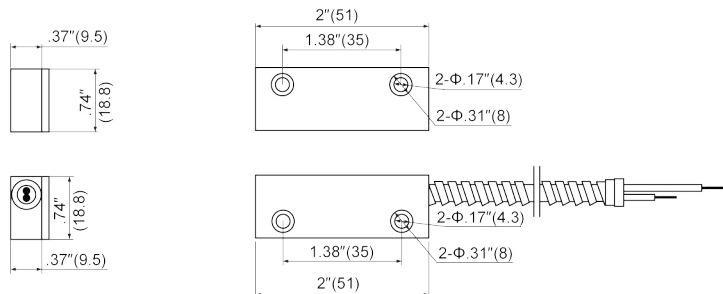

W RG W DD W



TANE ALARM PRODUCTS

906 JERICHO TURNPIKE, NEW HYDE PARK, NY 11040

Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125

www.tanealarm.com • E-MAIL: info@tanealarm.com





MET-200

SURFACE MOUNT CONTACTS





Outline Dimensions

Unit: inch(mm)





MET-200/MET-201B

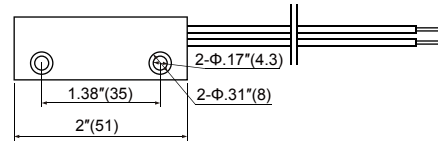


MET-202C AR

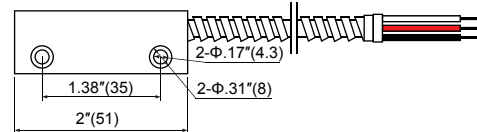

MET-202C

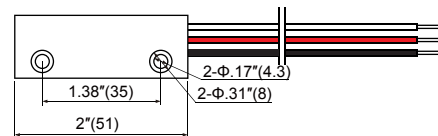

MET-202C & MET-202C AR Wiring Diagram

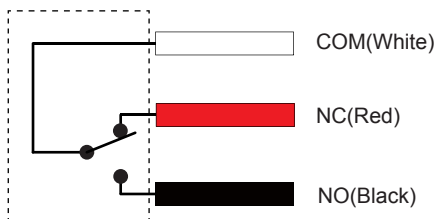

The Best Guarantee Since 1984 : \$50-1

TANE ALARM PRODUCTS

906 JERICHO TURNPIKE, NEW HYDE PARK, NY 11040

Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125

www.tanealarm.com • E-MAIL: info@tanealarm.com