



EN: This Datasheet/Document is presented by the manufacturer.




Please visit our website for pricing and availability at www.hestore.hu.



东莞市宏聚电子五金制品有限公司



HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

MR-1

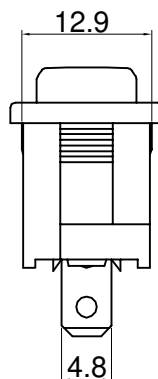

Rating: 10A 125V AC (UL CUL)
6A 250V AC (CQC ENEC VDE)
Contact Resistance: 50mΩ Max
Insulation Resistance: DC 500V 100MΩ Min
Dielectric Strength: AC1500V 1 minute
Electrical life: 10,000 cycles
Operating Temperature: 0°C~85°C

CUT-OUT



	X	Y
0.75~1.25	19.2-0.1	13.0+0.1
1.25~2.00	19.4-0.1	13.0+0.1
2.00~3.00	19.8-0.1	13.0+0.1

MATERIAL:

Body:Nylon66,UL rated:94V-2 min
Actuator:Nylon66,UL rated:94V-2 min
Terminal:Brass,silver or tin plated

0	1	2	3	4	5	7	8	9	A	B	C	D	E	G	H	J	L
None	•	ON OFF	=	—	—	ON/开 OFF/关	*	∞	☀	☉	☼	☽	☿	♂	♀	—	—

公差 TOLERANCES				.X± 0.3 .XX± 0.15 角度 ANGLE ± 1°				单位	DIMENSION UNIT mm.			
版本 VERSION				A1	比例尺 SCALE	NONE	日期 DATE	2014.07.17	品名	TITLE		图号
A1				重新整理后发行	2014.07.17	N/A	核准		MR-1-118-CXL-BRAAE-220			DRAWING NO
版本 VER.				变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	核准		MR-1-118-CXL-BRAAE-220_A1			

File Code: HJ-WI-E-03A