



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

LD-BZEN-1201




LD-BZEN-1201

Type	Unit	LD-BZEN-1201
Rated Voltage	V	1.5
Operating Voltage	V	1-2
*Rated Current(MAX)	mA	30
*Min Sound Output at 10 cm	dB	80
Coil Resistance	Ω	16 $\pm$ 4
*Resonant Frequency	Hz	2400
Operating Temperature	$^{\circ}\text{C}$	-20 - +70
Storage Temperature	$^{\circ}\text{C}$	-30 - +80
Housing Material		NORYL
Weight	g	2

*Value Applying at Rated Voltage (resonant frequency,1/2 duty, square wave)

FREQUENCY RESPONSE:

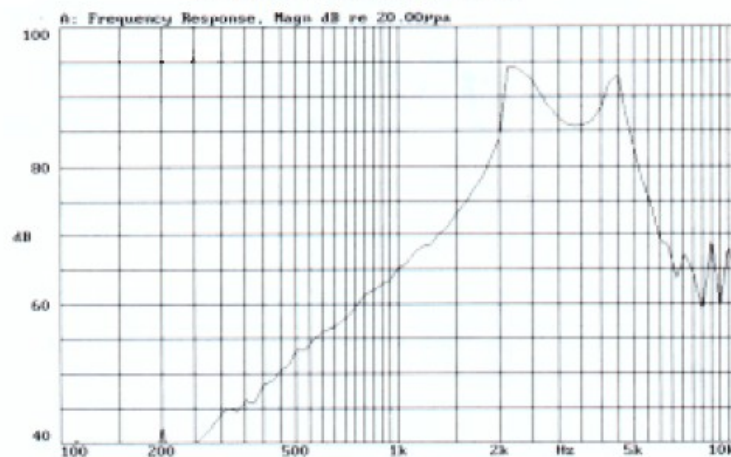

DIMENSIONS:

UNIT:mm
Tolerance:±0.5mm
Wave Solderable and Washable

