
EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.


Fast Recovery Epitaxial Diode (FRED)

I_{FAVM} = 109 A
V_{RRM} = 1200 V
t_{rr} = 40 ns

V_{RSM} V	V_{RRM} V	Type
1200	1200	DSEI 120-12A



TO-247 AD

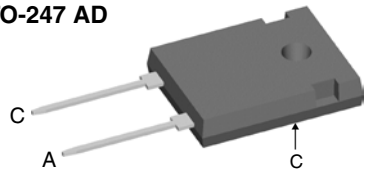

A = Anode, C = Cathode

Symbol	Conditions			Maximum Ratings	
I_{FRMS}	$T_{VJ} = T_{VJM}$			100	A
I_{FAVM} ①	T_C = 60°C; rectangular, d = 0.5			109	A
I_{FAV} ②	T_C = 95°C; rectangular, d = 0.5			75	A
I_{FRM}	t_P < 10 µs; rep. rating, pulse width limited by T_{VJM}			1200	A
I_{FSM}	T_{VJ} = 45°C;	t = 10 ms	(50 Hz), sine	600	A
		t = 8.3 ms	(60 Hz), sine	660	A
	T_{VJ} = 150°C;	t = 10 ms	(50 Hz), sine	540	A
		t = 8.3 ms	(60 Hz), sine	600	A
I^2t	T_{VJ} = 45°C;	t = 10 ms	(50 Hz), sine	1800	A^2s
		t = 8.3 ms	(60 Hz), sine	1800	A^2s
	T_{VJ} = 150°C;	t = 10 ms	(50 Hz), sine	1450	A^2s
		t = 8.3 ms	(60 Hz), sine	1500	A^2s
T_{VJ}				-40...+150	°C
T_{VJM}				150	°C
T_{stg}				-40...+150	°C
P_{tot}	T_C = 25°C			357	W
M_d	mounting torque			0.8...1.2	Nm
Weight	typical			6	g

Symbol	Conditions		Characteristic Values typ.	max.	
I_R	$V_R = V_{RRM}$	T_{VJ} = 25°C		3	mA
	$V_R = 0.8 \cdot V_{RRM}$	T_{VJ} = 25°C		1.5	mA
	$V_R = 0.8 \cdot V_{RRM}$	T_{VJ} = 125°C		20	mA
V_F	I_F = 70 A	T_{VJ} = 150°C		1.55	V
		T_{VJ} = 25°C		1.8	V
V_{T0}	for power-loss calculations only			1.2	V
r_T	$T_{VJ} = T_{VJM}$			4.6	mΩ
R_{thJC}				0.35	K/W
R_{thCH}	(version A)		0.25		K/W
R_{thJA}				35	K/W
t_{rr}	I_F = 1 A; -di/dt = 200 A/µs; V_R = 30 V; T_{VJ} = 25°C		40	60	ns
I_{RM}	V_R = 350 V; I_F = 75 A; $-di_F/dt$ = 200 A/µs L ≤ 0.05 µH; T_{VJ} = 100°C		25	30	A

① Chip capability, ② limited to 70 A by leads Data according to IEC 60747

Features

- International standard package JEDEC TO-247 AD
- Planar passivated chips
- Very short recovery time
- Extremely low switching losses
- Low I_{RM}-values
- Soft recovery behaviour
- Epoxy meets UL 94V-0

Applications

- Antiparallel diode for high frequency switching devices
- Anti saturation diode
- Snubber diode
- Free wheeling diode in converters and motor control circuits
- Rectifiers in switch mode power supplies (SMPS)
- Inductive heating and melting
- Uninterruptible power supplies (UPS)
- Ultrasonic cleaners and welders

Advantages

- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching
- Low losses
- Operating at lower temperature or space saving by reduced cooling

IXYS reserves the right to change limits, test conditions and dimensions.

20121114a

© 2012 IXYS All rights reserved

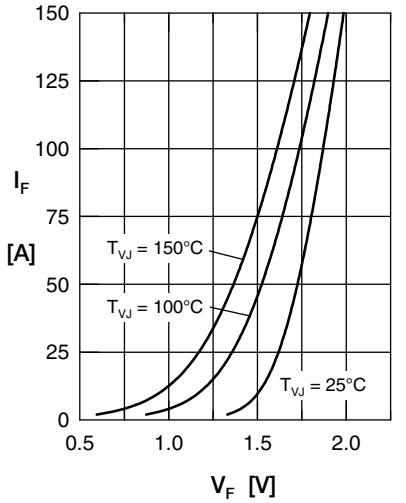


Fig. 1 Forward current I_F vs. V_F

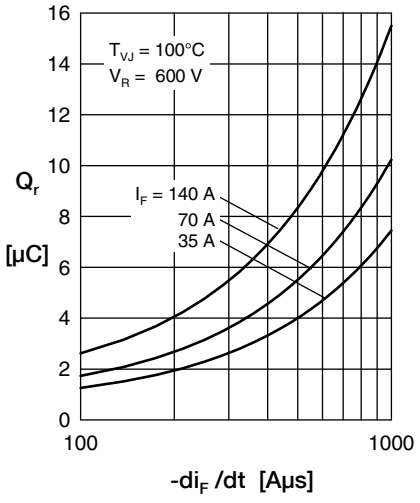


Fig. 2 Reverse recovery charge Q_r versus -di$_F$/dt

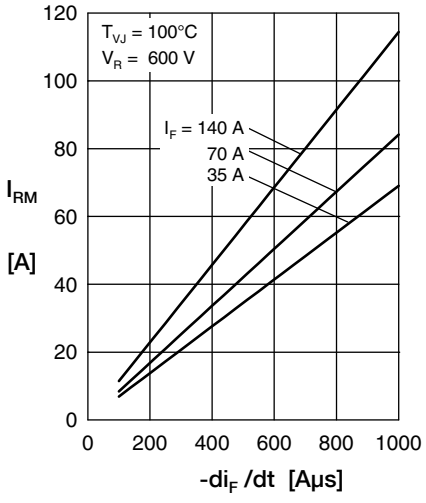


Fig. 3 Peak reverse current I_{RM} versus -di$_F$/dt

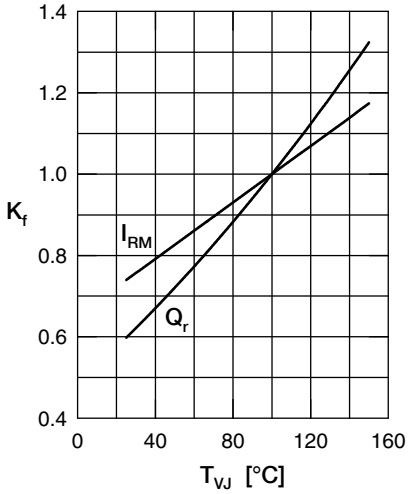


Fig. 4 Dynamic parameters Q_r, I_{RM} versus T_{VJ}

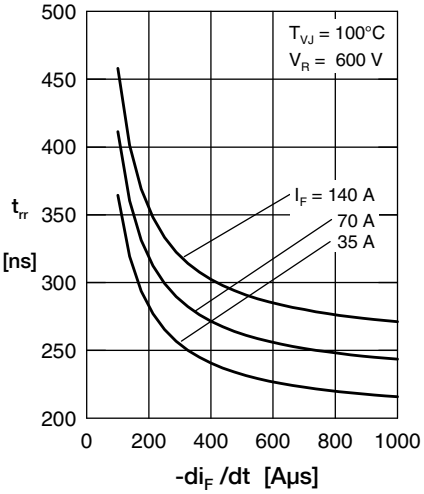


Fig. 5 Recovery time t_{rr} versus -di$_F$/dt


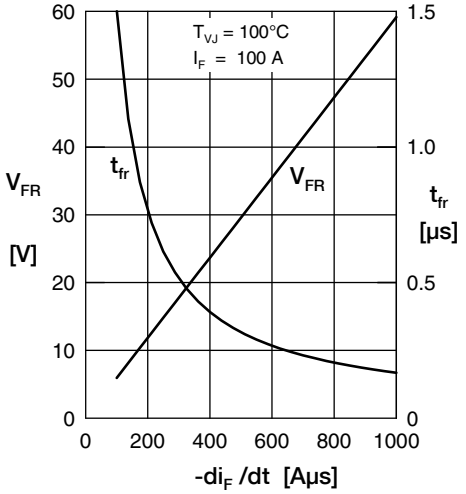


Fig. 6 Peak forward voltage V_{FR} and t_{fr} versus -di$_F$/dt

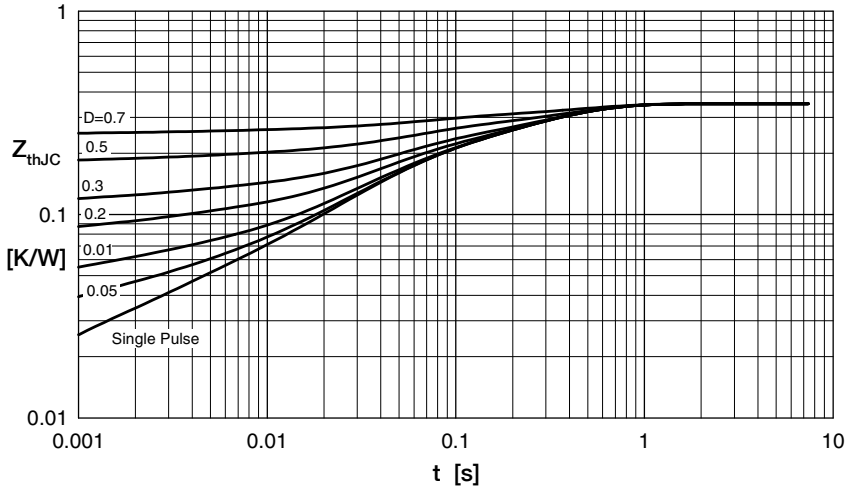

Constants for Z_{thJC} calculation:


i	R_{thi} (K/W)	t_i (s)
1	0.017	0.00038
2	0.0184	0.0026
3	0.1296	0.0387
4	0.185	0.274

Fig. 7 Transient thermal resistance junction to case at various duty cycles

IXYS reserves the right to change limits, test conditions and dimensions.

© 2012 IXYS All rights reserved

Dimensions TO-247 AD

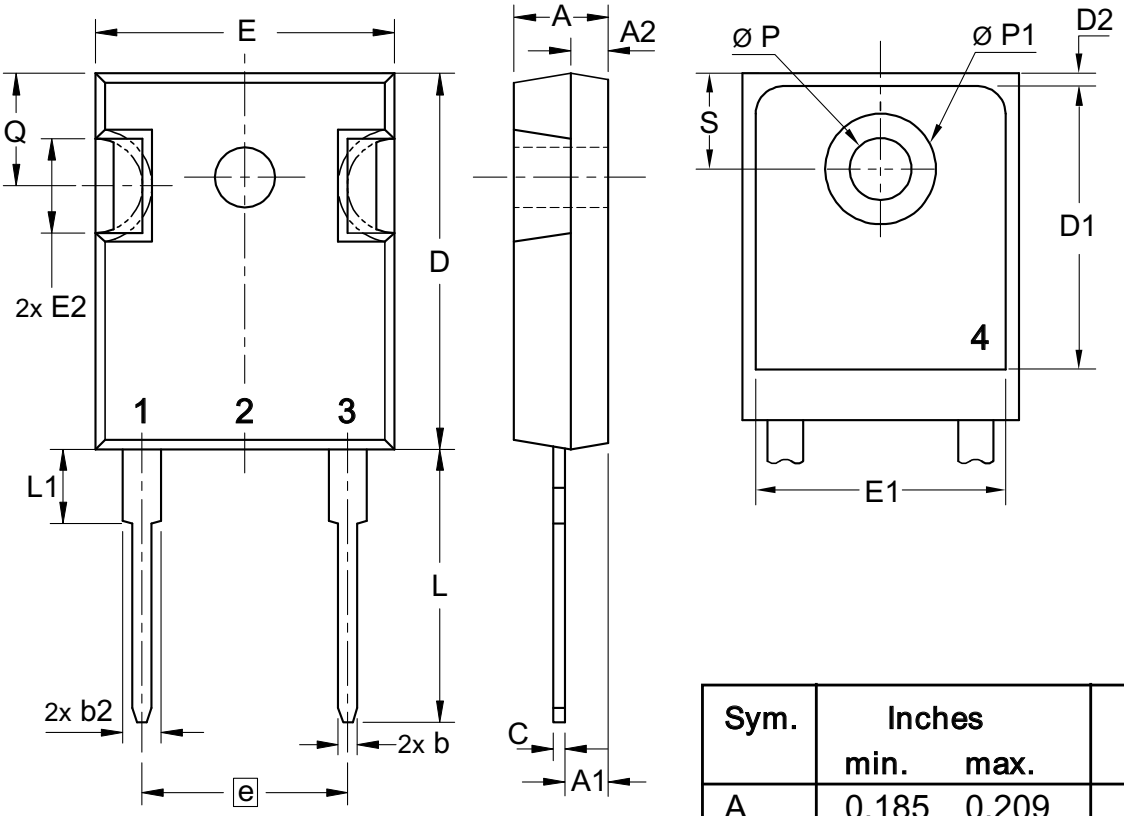

Sym.	Inches		Millimeter	
	min.	max.	min.	max.
A	0.185	0.209	4.70	5.30
A1	0.087	0.102	2.21	2.59
A2	0.059	0.098	1.50	2.49
D	0.819	0.845	20.79	21.45
E	0.610	0.640	15.48	16.24
E2	0.170	0.216	4.31	5.48
e	0.430 BSC		10.92 BSC	
L	0.780	0.800	19.80	20.30
L1	-	0.177	-	4.49
Ø P	0.140	0.144	3.55	3.65
Q	0.212	0.244	5.38	6.19
S	0.242 BSC		6.14 BSC	
b	0.039	0.055	0.99	1.40
b2	0.065	0.094	1.65	2.39
b4	0.102	0.135	2.59	3.43
c	0.015	0.035	0.38	0.89
D1	0.515	-	13.07	-
D2	0.020	0.053	0.51	1.35
E1	0.530	-	13.45	-
Ø P1	-	0.29	-	7.39

IXYS reserves the right to change limits, test conditions and dimensions.

© 2012 IXYS All rights reserved