
EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

KEMET Part Number: C4ASPBW4120A3JJ

(4ASPBW4120A3JJ)

Film, Metallized Polypropylene, Power, KEMET, C4AS, 1.2 uF, 5%, 1,200 V, 70C, Lead Spacing = 37.5mm

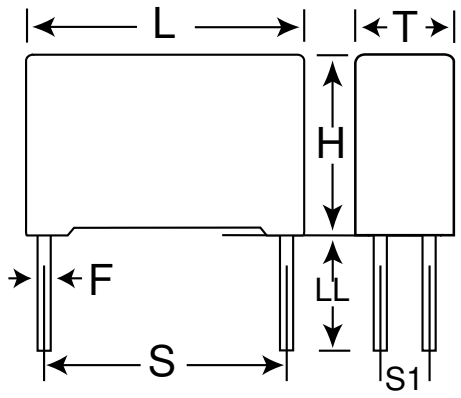

General Information	
Dielectric:	Metallized Polypropylene
Style:	Radial
Supplier:	KEMET
Series:	C4AS
RoHS:	Yes
Lead:	4 Wire Leads

Dimensions	
L	42.5mm NOM
H	37mm NOM
T	28mm NOM
S	37.5mm +/-0.4mm
LL	6mm -2mm

Specifications	
Capacitance:	1.2 uF
Capacitance Tolerance:	5%
Voltage DC:	1200 VDC
Voltage AC:	630 VAC
Temperature Range:	-40/+85C
Rated Temperature:	70C
Dissipation Factor:	0.05%
Max dVdt:	965 V
Resistance:	2.9 mOhms (100kHz)
Current:	28 Amps (100kHz 70C), 1158 Amps (Peak)

Packaging Specifications	
Packaging:	Bulk
Packaging Quantity:	36

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

© 2006 - 2016 IntelliData.net