



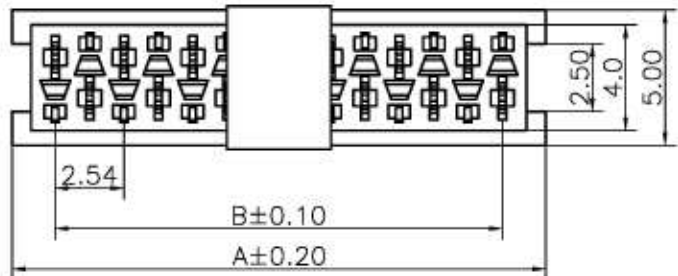

HESTORE.HU
elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

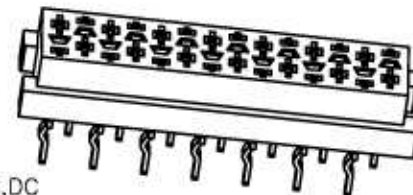




Pos	A	B	C
4	7.00	3.81	5.60
6	9.54	6.35	8.14
8	12.08	8.89	10.68
10	14.62	11.43	13.22
12	17.16	13.97	15.76
14	19.70	16.51	18.30
16	22.24	19.05	20.84
18	24.78	21.59	23.38
20	27.32	24.13	25.92
22	29.86	26.67	28.46
24	32.40	29.21	31.00
26	34.94	31.75	33.54

Specifications:
 Current rating:1.0A AC,DC
 Voltage rating:30V AC, DC
 Contact resistance:20m ohm Max
 Insulation resistance:1000M ohm Min
 Withstanding voltage:AC 500V AC/minute
 Operating Temperature:-40°C ~ +105°C
 Materials:
 Insulator:High Temp Plastic UL94V-0
 Contact material:Phosphor Bronze
 Finish:Tin Plated

How to Order

TMM-X-X-XX-X

- | | |
|-----------------------|---|
| Type | Packaging |
| 1-IDC Male | 1 - Tape & Reel |
| 2-IDC Plug | 2 - Tube |
| 3-DIP Male Straight | 3 - Bag |
| 4-DIP Female Straight | |
| 5-DIP Female R/A | Number of Positions |
| 6-SMT Female Straight | 04, 06, 08, 10, 12,
14, 16, 18 or 20 |
| Locking System | |
| 0-without lock | |
| L-with lock | |

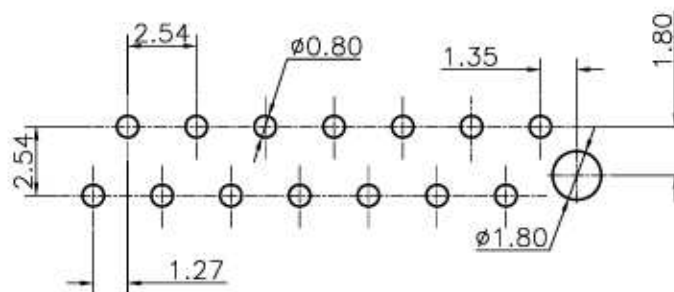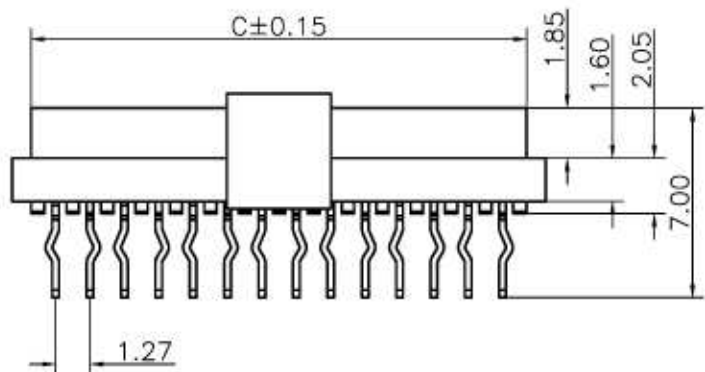

PCB Layout



TOLERANCE (mm)	APPROVALS	DATE	TITLE	AMPHENOL Amphenol European Design Center	
X, ±0.3	DESIGN: Stephane	2005/04/22	Micro Match Dip type Female	Scale N.A.	Sheet 1 of 1
X.X, ±0.1	CHECKED: Rob K.	2005/04/23			
X.XX, ±0.05	APPROVED: Rob K.	2005/04/23			
UNLESS OTHERWISE SPECIFIED	UNIT:	SIZE: MM	DRAWING N°: TMM-4-0-XX-X	REV: A	