




EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

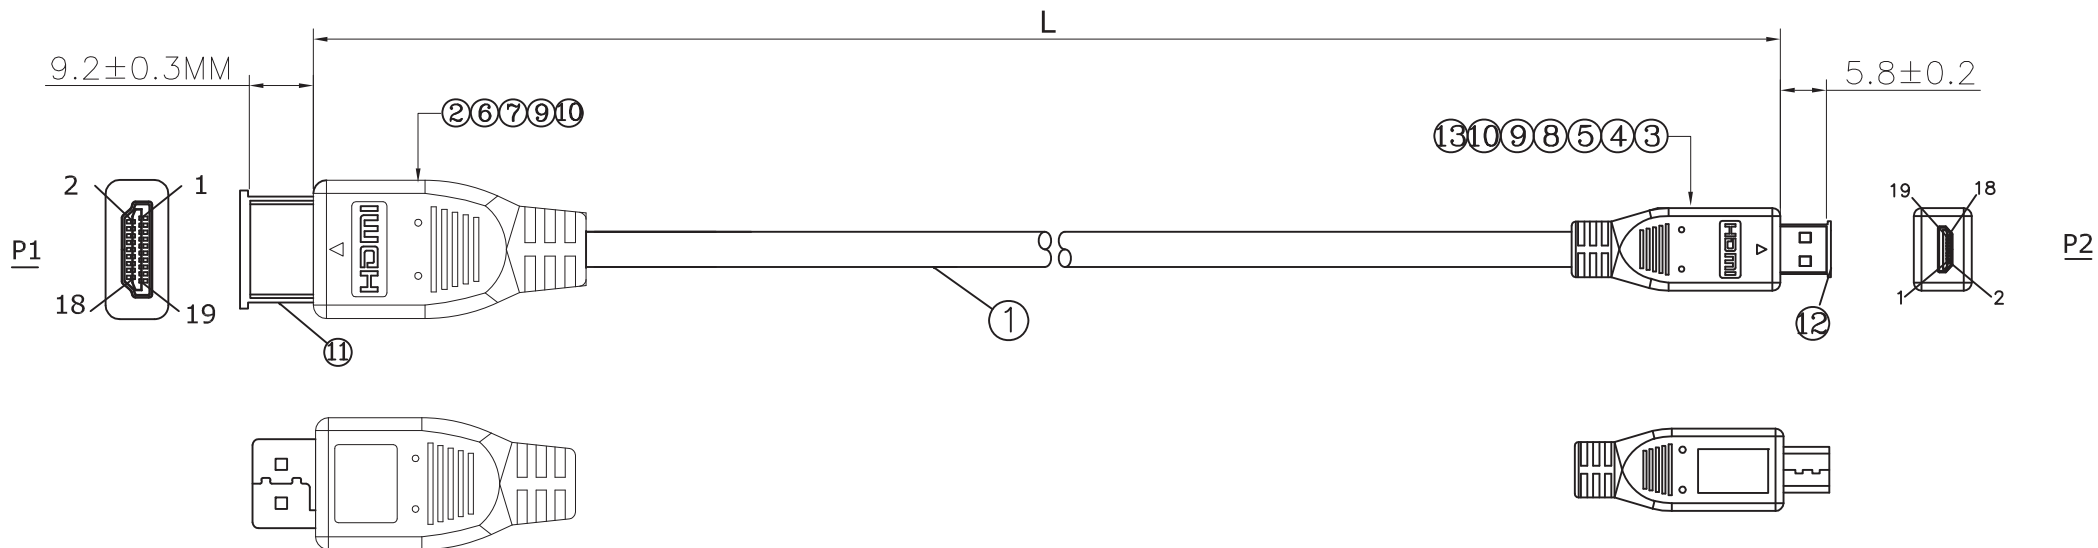


ELECTRICAL TEST:

- 1.100% OPEN & SHORT & MIS WIRE TEST
- 2.CONTACT RESISTANCE:2 OHM(MAX)
- 3.INSULATION RESISTANCE:10M OHM(MIN)
- 4.HI-POT TEST:DC 300V/10ms

Model No.	EAN Code	Length
CH0030	4260113575734	1000±30mm
CH0031	4260113575741	1500±30mm
CH0032	4260113575758	2000±30mm
CH0033	4260113575765	3000±40mm
CH0034	4260113575772	4600±50mm

PIN Assignment

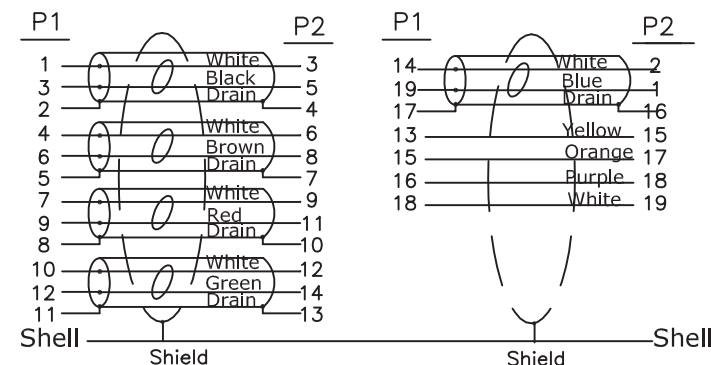

CABLE MARKING:

HIGH SPEED HDMI® CABLE WITH ETHERNET E**** (UL) AWM STYLE 20276 80 °C 30V VW-1 *****

13	A10-R075136	H.S.T: ϕ 1.0*7mm BLACK	4	PCS
12	A6-0000385	HDMI DM DUST CAP	1	PCS
11	A6-0000015	HDMI AM DUST CAP	1	PCS
10	A5-R047001	45P BLACK PVC	16	G
9	A5-R047011	PE	4	G
8	A10-R075174	H.S.T: ϕ 1.5*7mm BLACK	6	PCS
7	A10-R075133	H.S.T: ϕ 1.5*16mm BLACK	1	PCS
6	A10-R065356	H.S.T: ϕ 0.6*8MM BLACK	6	PCS
5	A6-R104507	HDMI DM BACK SHELL NICKEL PLATED	1	PCS
4	A6-R104506	HDMI DM FRONT SHELL GOLD PLATED	1	PCS
3	A2-R028403	HDMI D M 19P INSULATION :BLACK 19PIN PIN GOLD PLATED	1	PCS
2	A2-R020044	HDMI M 19P SHELL GOLD PLATED SOLDER INSULATION :BLACK	1	PCS
1	A4-R001864	UL20276 (34AWG*1P+EAM)*5C+32AWG*1P+32AWG*2C+AB 16/10/0.08 TC JACKET COLOR:BLACK OD: 4.2MM	L	M
NO	P/N	DESCRIPTION	Q'TY	UNIT

REV.	DESCRIPTION		DATE
	TOLERANCE INCHES M/M		2direct GmbH
.X	.015	.30	TITLE: HDMI type A Male to Micro HDMI type D Male Cable, Black
.XX	.010	.10	
.XXX	.005	.05	
DRAWN BY	JOE		CUSTOMER :
CHECK BY			CUSTOMER P/N:
APPD BY			SCALE
			NONE
			UNIT
			MM
			DATE
			11.08.02
			DRAWING NO:
			REV A
			1/2