

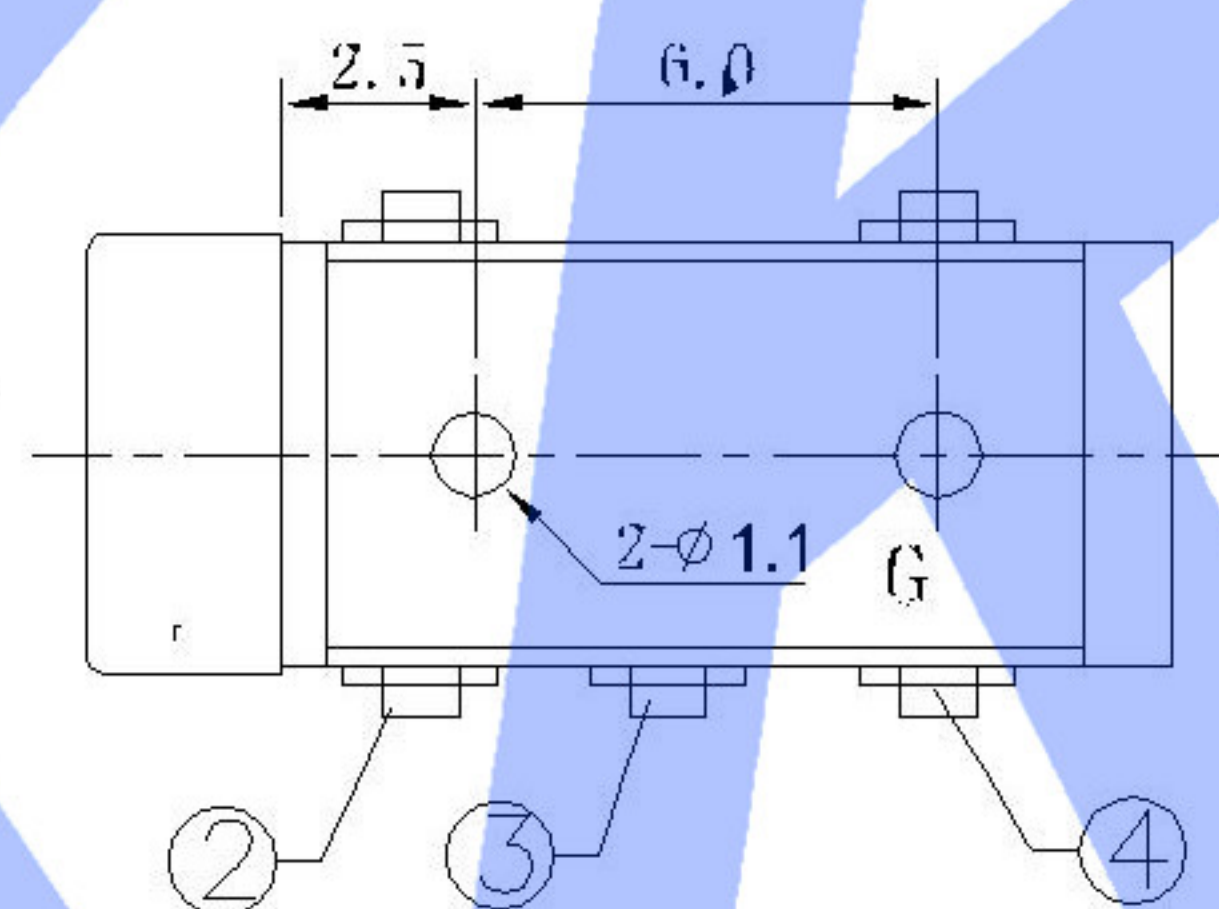
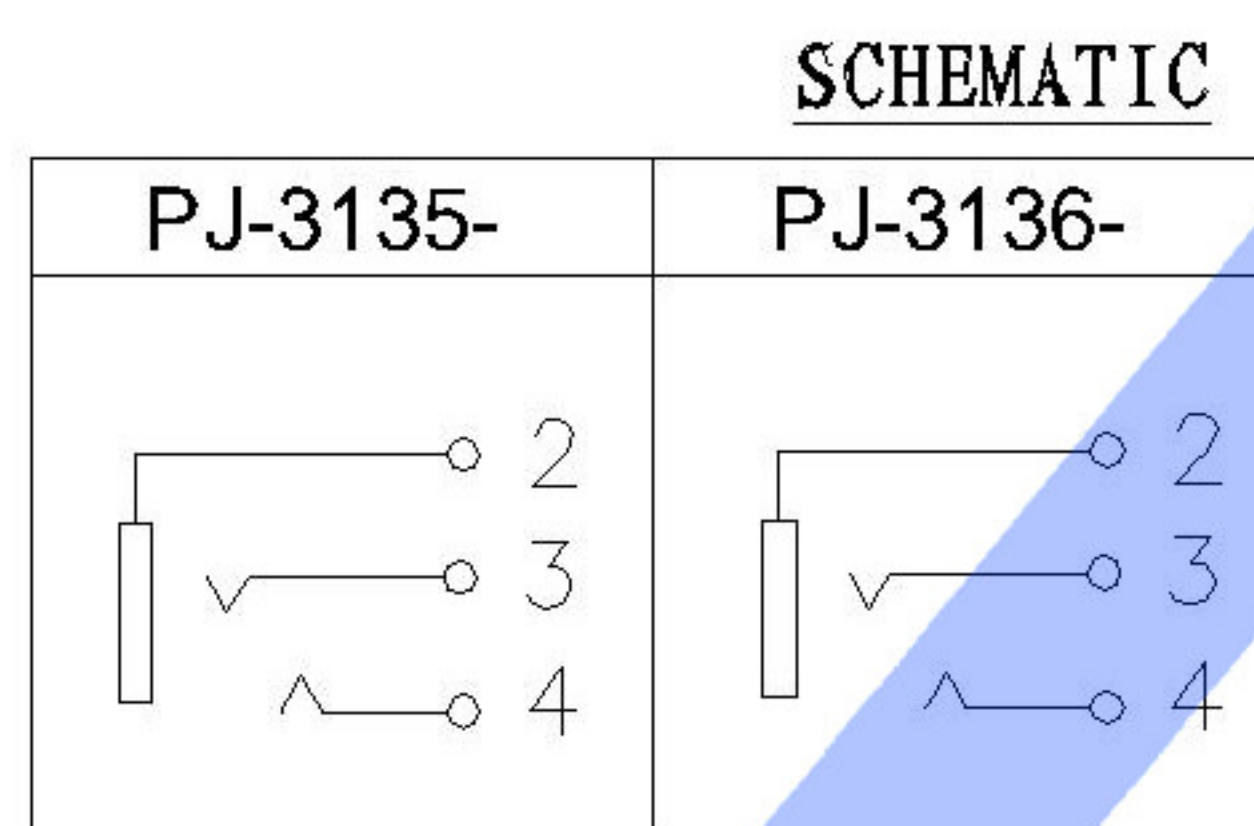
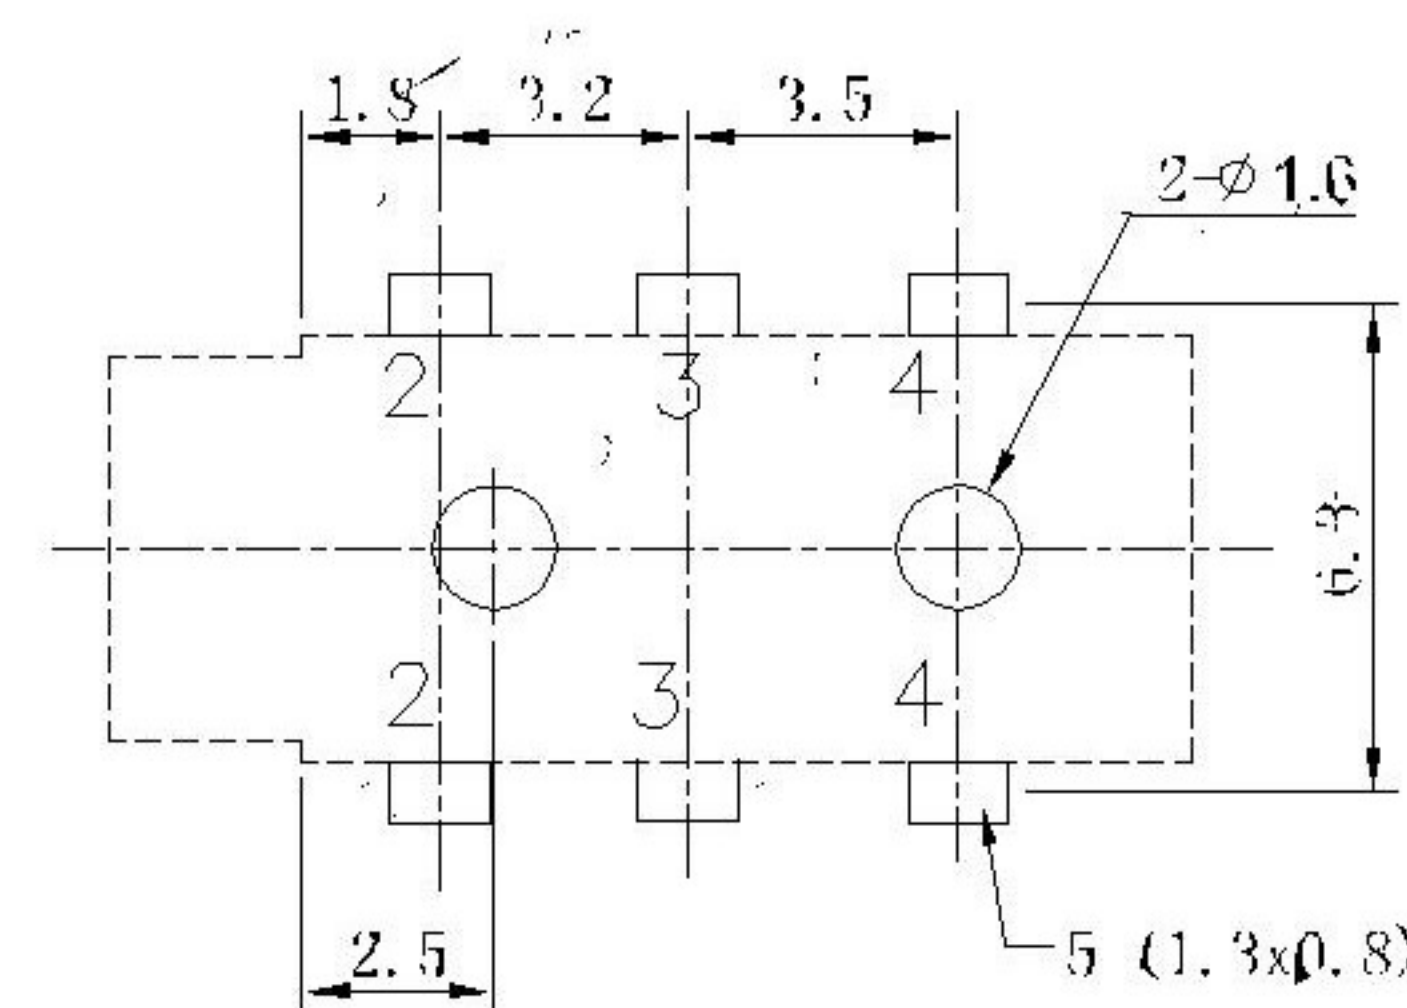
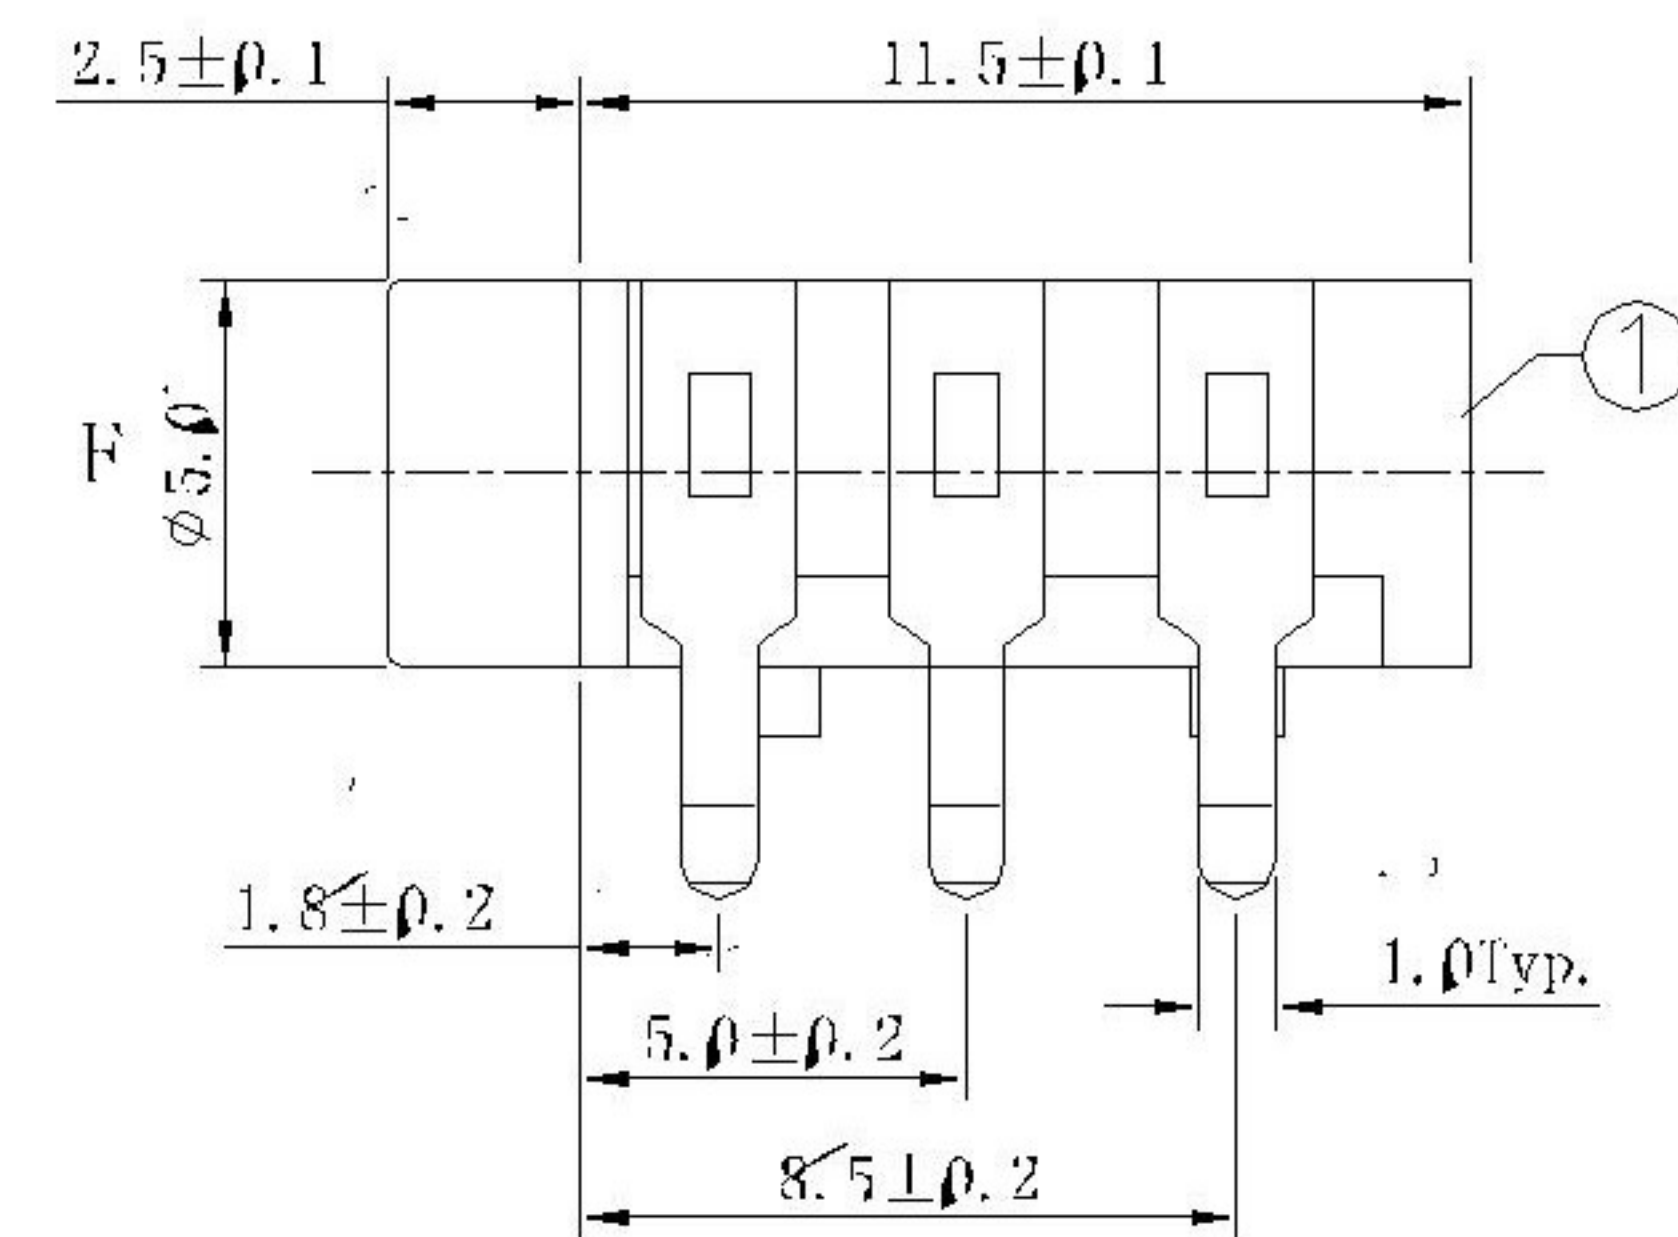
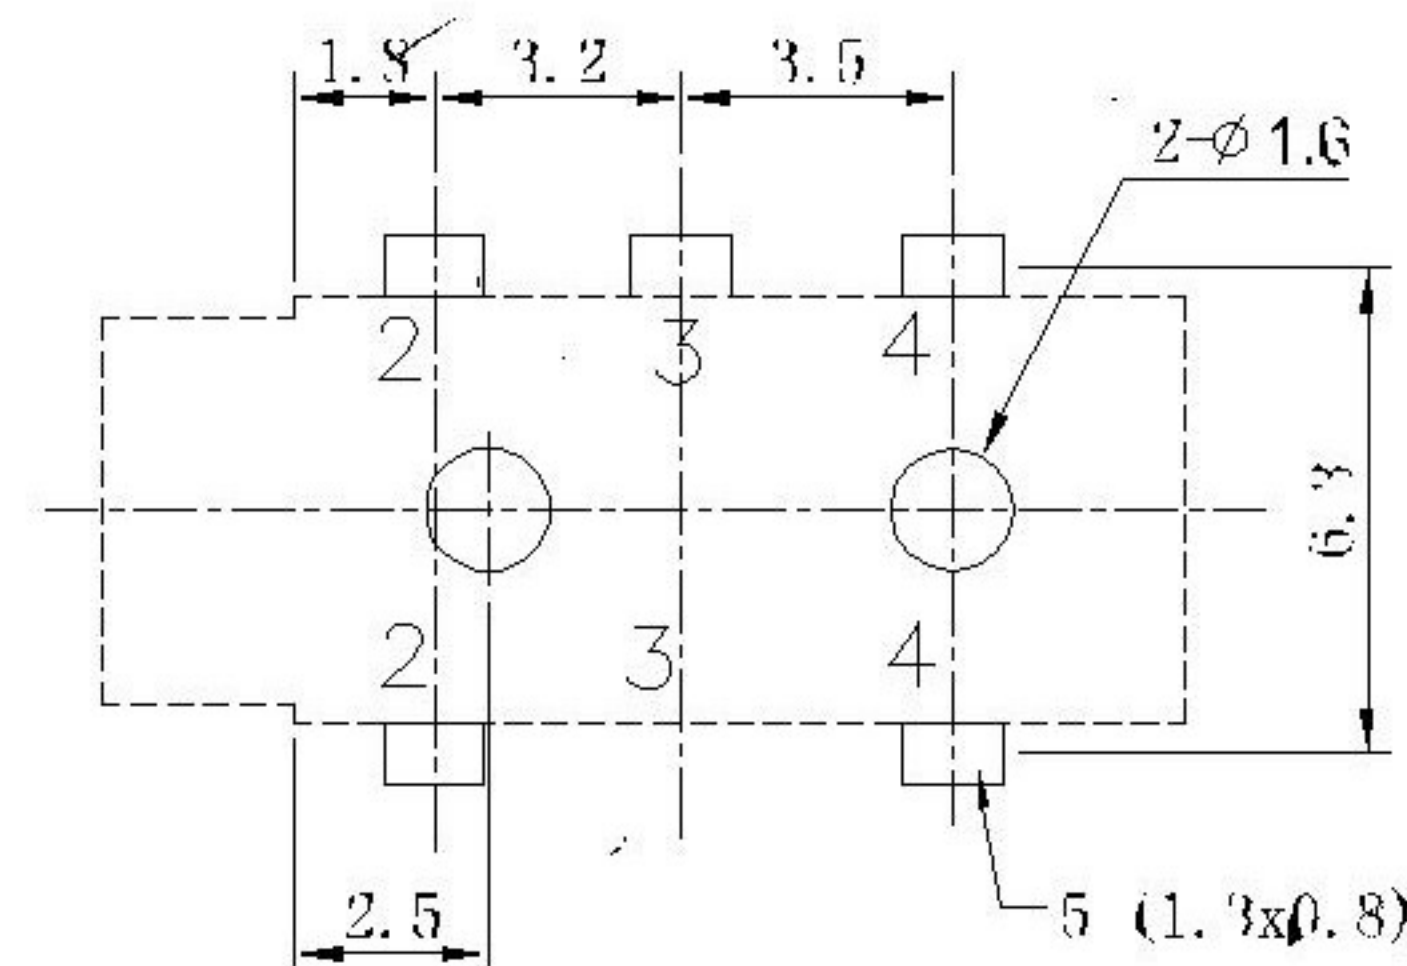


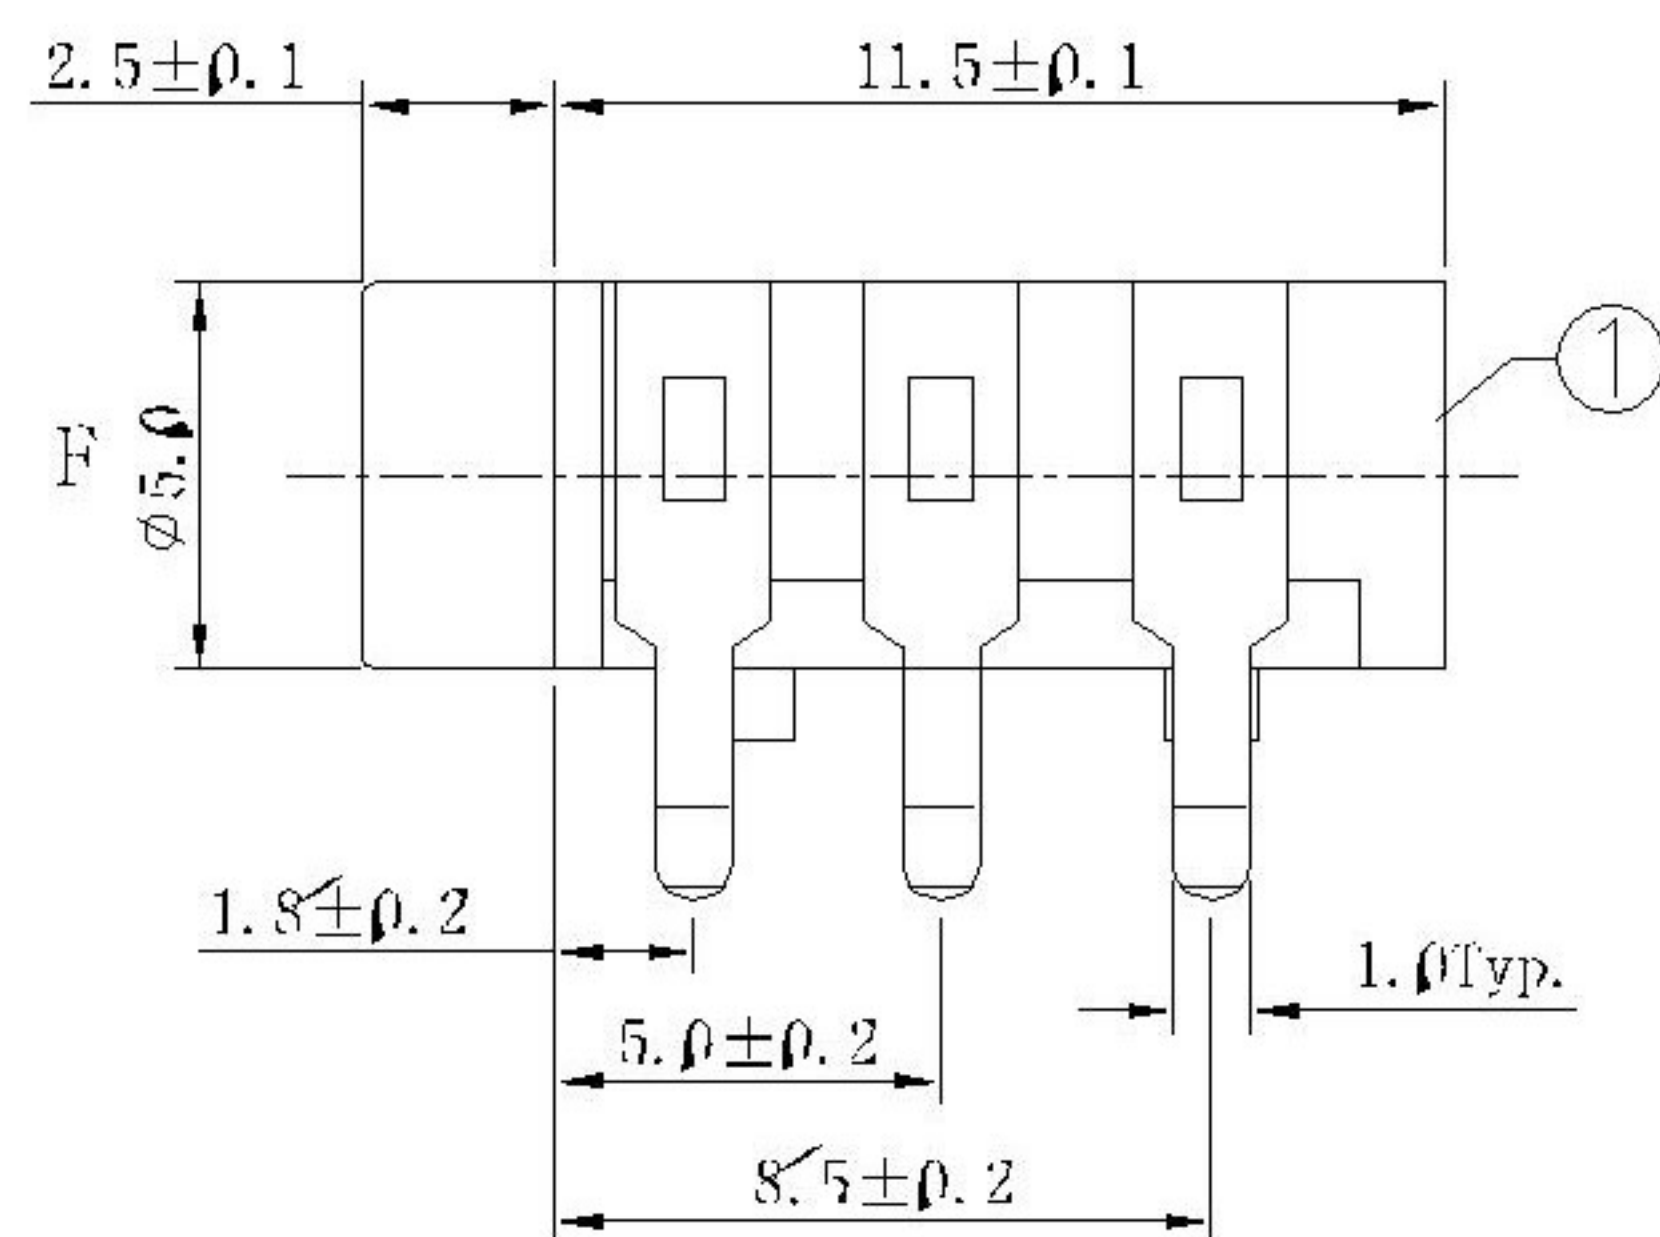

EN: This Datasheet/Document is presented by the manufacturer.


Please visit our website for pricing and availability at www.hestore.hu.

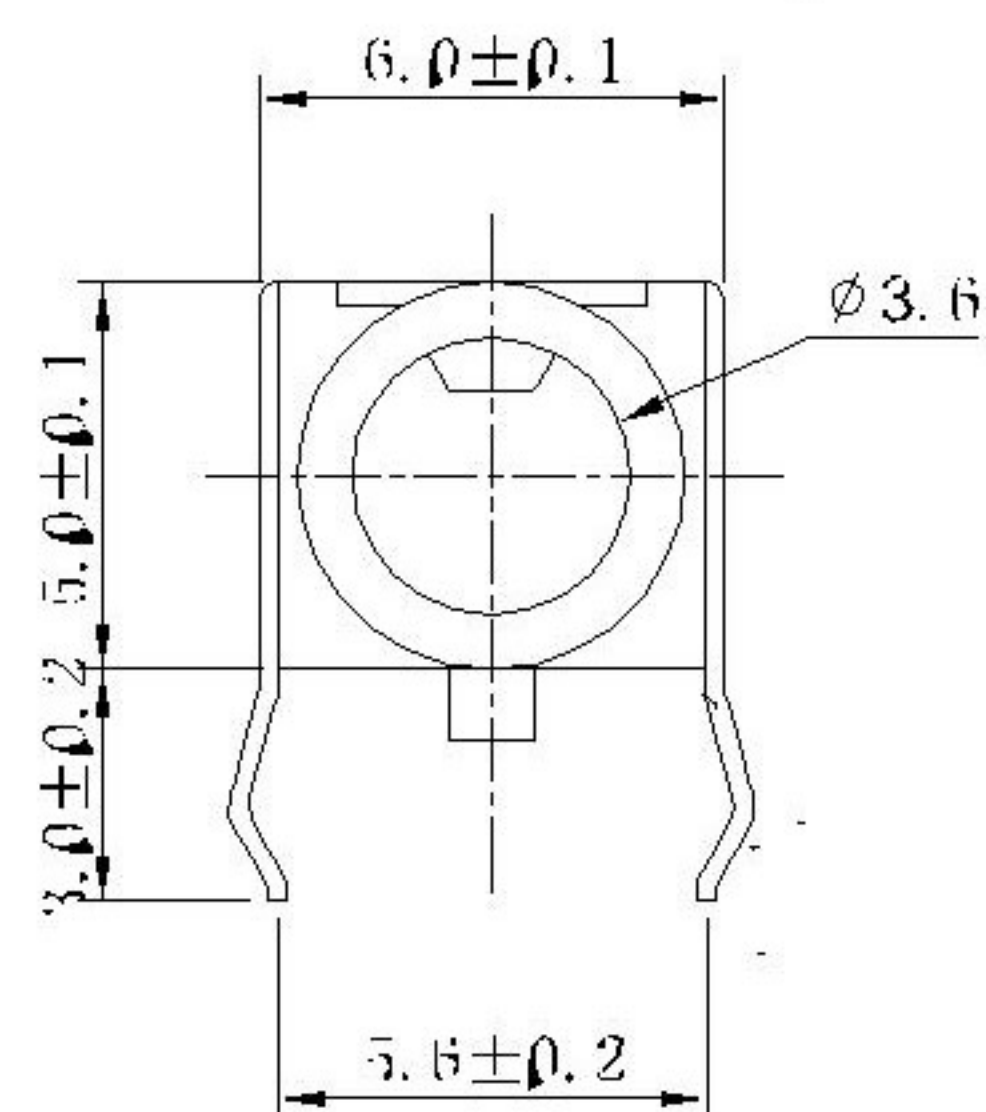

PJ-3135-

SPECIFICATION

- 1 Rating : DC 30V 10A
- 2 Contact resistance : $\leq 30m\Omega$
- 3 Insulation resistance : $\geq 100M\Omega$
- 4 Withstand voltage : 500VAC
- 5 Insertion and extraction force : 3-20N
- 6 life test : 5,000 cycles

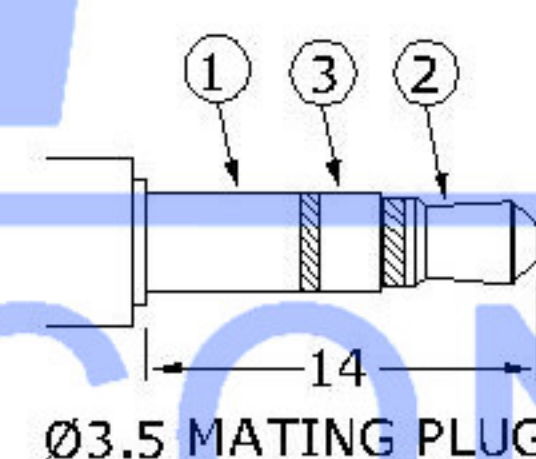

Ø3.5 MATING PLUG

PJ-3136-

R:red	G:green
Y:yellow	B:black
W:white	T:transparent

	MATERIAL	PLATING
terminal 1	copper all oy	silver
terminal 2	copper all oy	silver
terminal 3	copper all oy	silver
terminal 4	copper all oy	silver
plastic	PA9T	

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
△X					ANGLAR
△X					L≤4
△X					4<L≤16
					16<L≤63
					L>63

DSND	DATE	SCALE: N/A	MODEL TYPE:
DWN	DATE	VIEW:	3.5 PHONE JACK
CHKD	DATE	UNIT: mm	PART NO.:
APPD	DATE	SIZE: A4	DWG NO.: PJ-313X-X
XKB INDUSTRIAL PRECISION CO.,LIMITED			WEIGHT
			1.0g
			SHEET
			1/1
			REVISION
			A0