




EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

LiY(St)Y - Alarm Cable

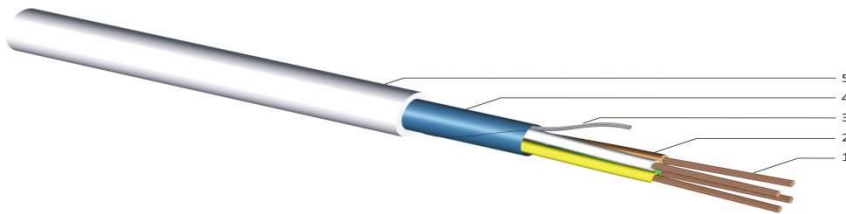

1. Multi-wire copper (Min. Cu: 99,99%)
2. PVC core insulation
3. 0,38mm tinned copper
4. AL/PET foil
5. PVC sheathing white

Nominal voltage: 250 V
Test Voltage: 2000 V
Insulation resistance: max. 200 MOhm/ km
Minimum bending radius: 10 x outhter d.

Temperature range: -35 C -- + 80 C

Number of cores	outhter dia. max in mm	weight kg/km
2x0,22	3,4	15
2x0,22+2x0,5	4,6	25
4x0,22	3,8	19
4x0,22+2x0,5	5	31
4x0,22+2x0,75	5,7	40
6x0,22	4,4	24
6x0,22+2x0,5	5,4	39
6x0,22+2x0,75	6	48
8x0,22	4,8	30
8x0,22+2x0,5	5,7	44
10x0,22	5,6	38
12x022	6	44