




EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

INFRARED SENSORS USER'S GUIDE

UNIVERSAL INFRARED SENSORS FOR AUTOMATIC DOORS




TECHNICAL SPECIFICATIONS

GB

TECHNOLOGY	: Infrared
RECEIVER RANGE	: $\leq 20\text{m}$: Range can be reduced to 30% in bad Weather conditions: fog, rain, dust, etc.
INFRA-RED FREQUENCY	: 1.92Khz
POWER SUPPLY	: 12 to 24V DC/AC
WAVE LENGTH	: 940nm
INPUT	: RX 15mA - TX 30mA
OPERATING TEMPERATURE	: -20°C to 70°C
SENSORS' ANGLE	: $< \pm 10^{\circ}$
RELAY OUTPUT	: 1A max 30V
DIMENSIONS	: 49.2 x 76 x 21.6mm

CONNECTING THE SENSOR

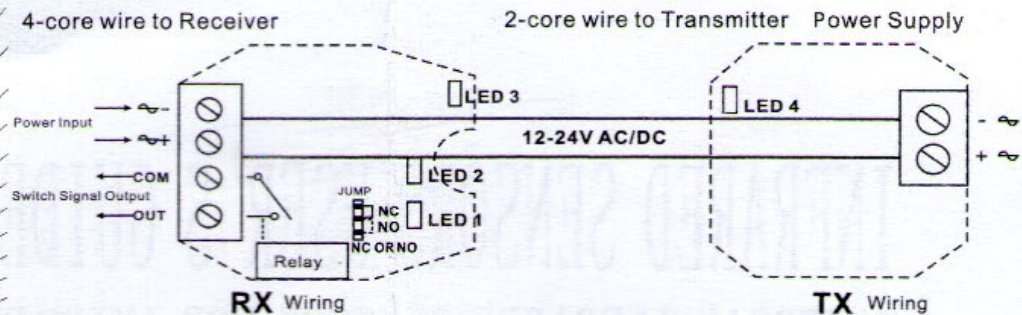


Installation Note:

Best mounting height less than 20cm, sensor distance not less than 2m. Vertically mounting, level match.
Power indicator : LED1, LED4
Alarm indicator : LED2
Signal indicator : LED3

The Beam signal is strong within 1 meter, for short distance use, please remove the lens to reduce the signal.

MOUNTING THE SENSOR



Note: No Inversion avoid Water in

