




EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
GW	-		U	EH-1641-98	15 OCT 98	EvE
			V	SR10-0119-01	20 MAR 01	KV
			V1	SR10-0313-02	18 JUN 02	KV

- 1 SEE SHEET 2 FOR MODULAR JACK 6 POS./4 CONTACTS
- 2 FOR APPLICATION INFORMATION SEE AMP SPEC. 114-19019.
- 3 FOR PERFORMANCE REQUIREMENTS SEE AMP SPEC. 108-19064.
- 4 TOLERANCES UNLESS OTHERWISE SPECIFIED: ± 0.15 .

△ TRUE POSITIONING WILL NOT BE GUARANTEED USING THIS PACKAGING TYPE.

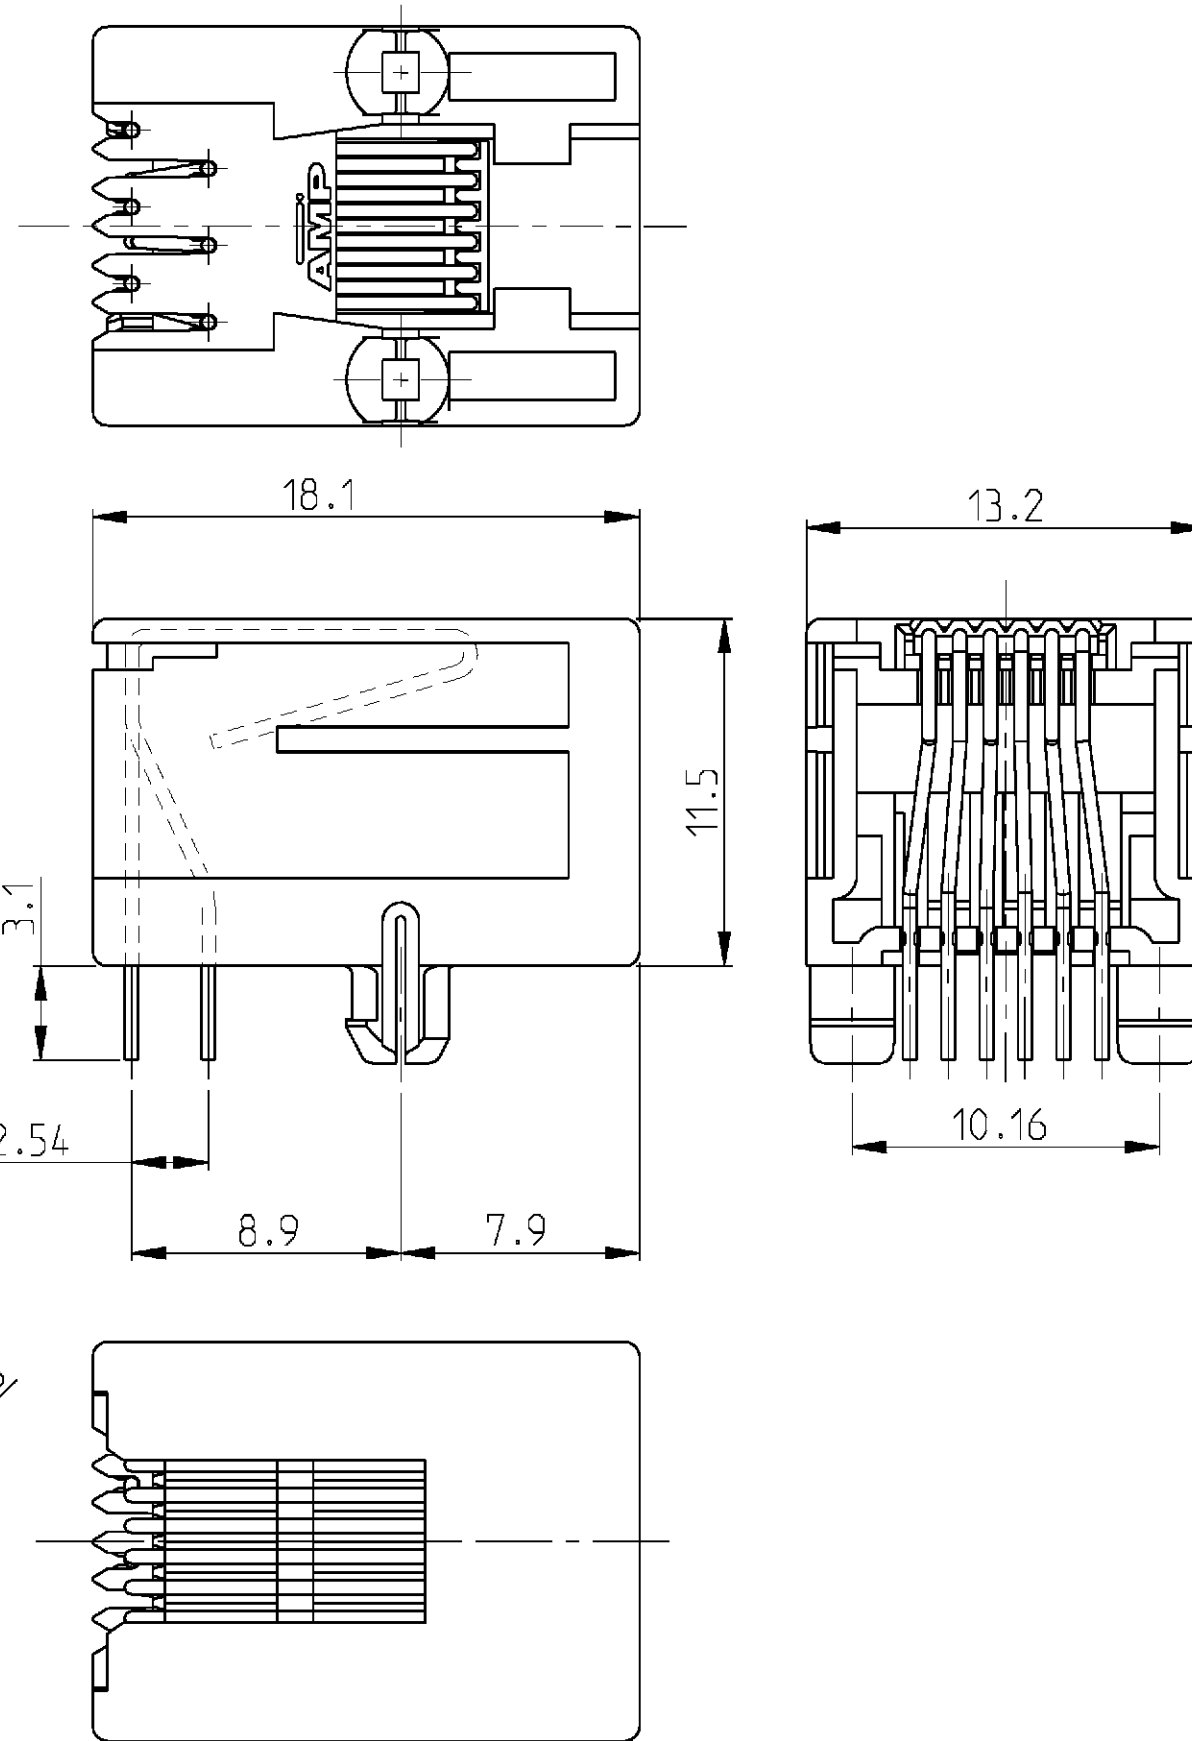

TAPE MOUNTED 800 PCS/REEL	6 POS./ 6 CONTACTS	IN CONTACT AREA: 1.2 μ m MIN. SEL. GOLD OVER 1.2 μ m MIN. NICKEL SOLDER TINES: 2.5 μ m MIN. TIN-LEAD OVER 1.2 μ m MIN. NICKEL	HOUSING COLOR BLACK	2-215876-3
BULK PACKED △ 1000 PCS IN A BOX			HOUSING AND CONTACT INSERT: RE-FLOW TEMPERATURE RESISTANT UL 94-V0	2-215876-1
250 PIECES IN A TRAY			HOUSING PA 4.6 CONTACT INSERT: PCT	2-215876-0
BULK PACKED △ 1000 PCS IN A BOX			CONTACTS: PH-BRONZE	3-215876-1
108 PIECES IN A MULTI-TUBE			HOUSING COLOR BLACK PBT, UL 94 V-0	1-215876-1
TAPE MOUNTED 800 PCS/REEL			CONTACT INSERT: PBT, UL 94 V-0	215876-1
PACKAGING	REMARKS	FINISH	MATERIAL	P/N

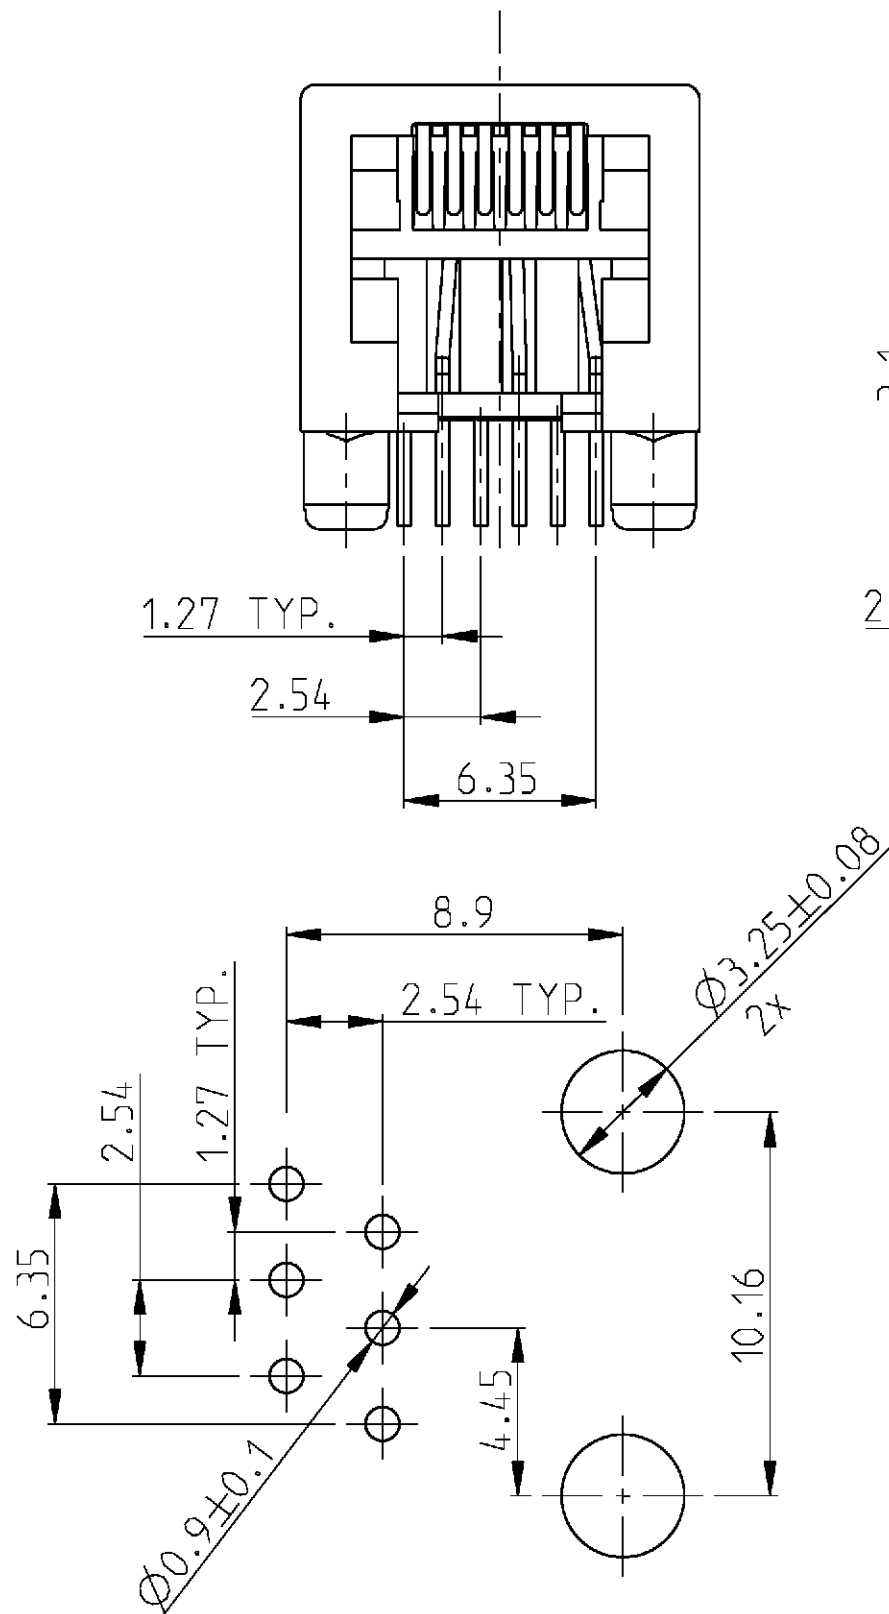

PRINTED CIRCUIT BOARD LAYOUT (6 POS./6 CONTACTS)

[VIEW SHOWN IS CIRCUIT (NONCOMPONENT) SIDE OF BOARD]
PRINTED CIRCUIT BOARD THICKNESS: 1.6 mm NOMINAL.
TOLERANCES UNLESS OTHERWISE SPECIFIED: ± 0.05

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN G.CONSTANT 24 SEP 96	Tyco Electronics Oostkamp - Belgium	
DIMENSIONS: mm		CHK G.CONSTANT 24 SEP 96	NAME MODULAR JACK, SIDE ENTRY, 6/6 FOR PRINTED CIRCUIT BOARD	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R.SMEETS	SIZE A2	
0 PLC $\pm$ 1 PLC ± 0.1 2 PLC ± 0.01 3 PLC ± 0.001 4 PLC ± 0.0001 ANGLES $\pm$ FINISH		PRODUCT SPEC APPLICATION SPEC WEIGHT	CAGE CODE 00779	
MATERIAL		CUSTOMER DRAWING	DRAWING NO C-215876	
		SCALE 4:1	RESTRICTED TO -	
		SHEET 1	REV V1	

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

2000



COPYRIGHT 2000






BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC
GWDIST
-

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
-		SEE SHEET 1	-	-	-

- 1 SEE SHEET 1 FOR MODULAR JACK 6 POS./6 CONTACTS.
- 2 FOR APPLICATION INFORMATION SEE AMP SPEC. 114-19019.
- 3 FOR PERFORMANCE REQUIREMENT SEE AMP SPEC. 108-19064.
- 4 TOLERANCES UNLESS OTHERWISE SPECIFIED: ± 0.15 .

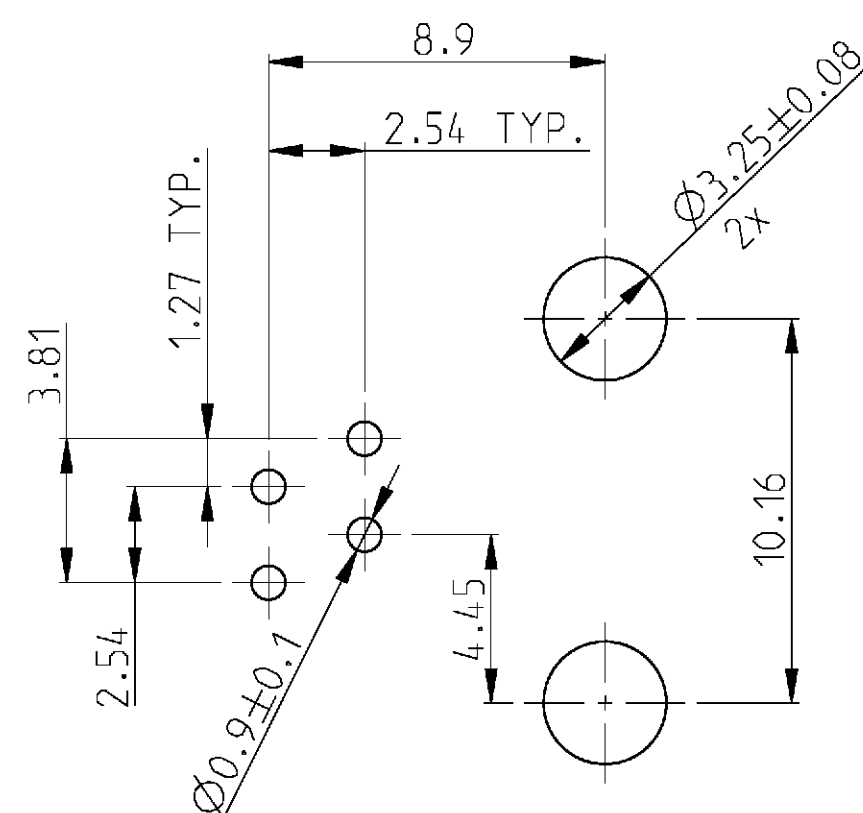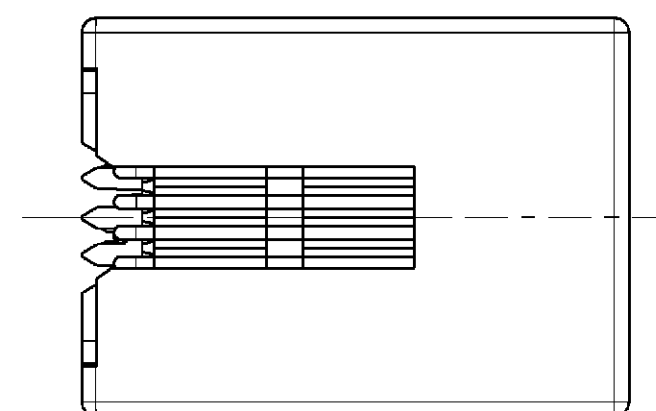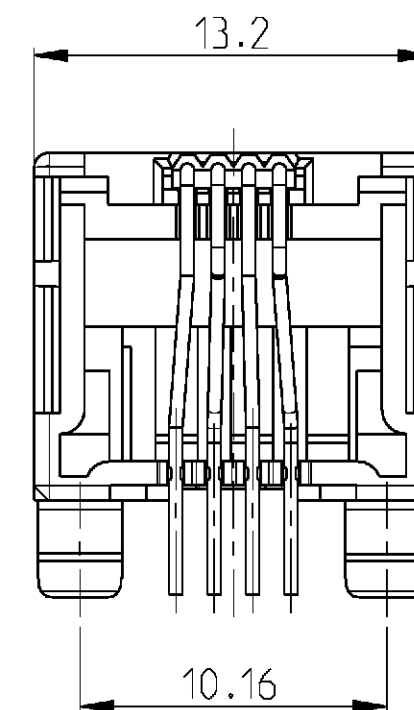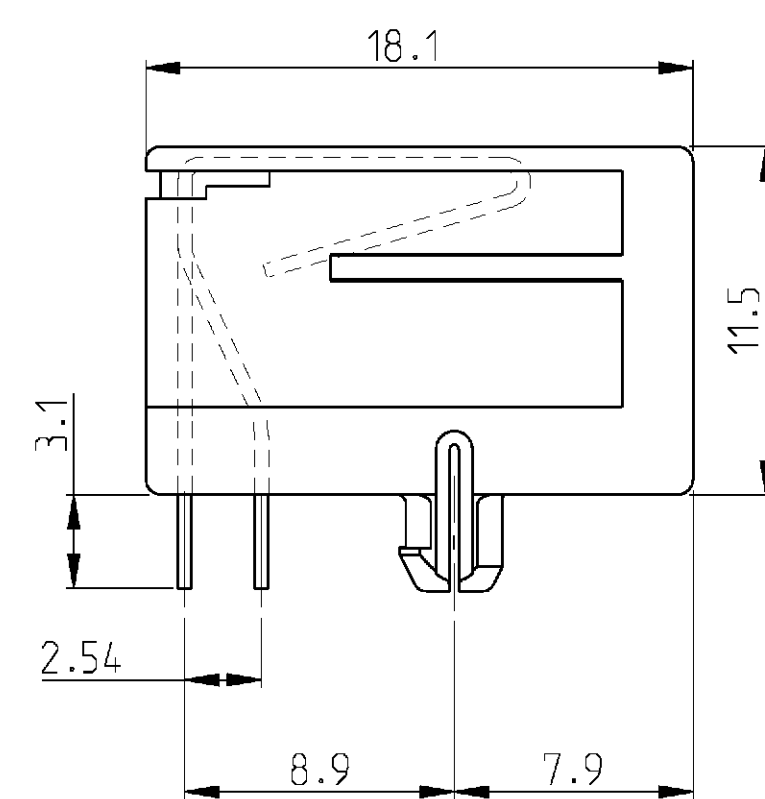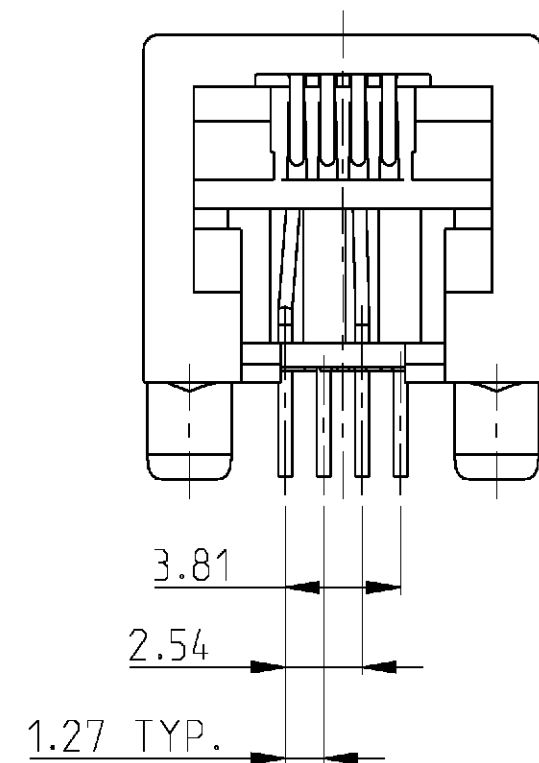

PRINTED CIRCUIT BOARD LAYOUT (6 POS./4 CONTACT)

[VIEW SHOWN IS CIRCUIT (NONCOMPONENT) SIDE OF BOARD]
PRINTED CIRCUIT BOARD THICKNESS: 1.6 mm NOMINAL.
TOLERANCES UNLESS OTHERWISE SPECIFIED: ± 0.05 .

TAPE MOUNTED 800 PCS/REEL	6 POS./ 4 CONTACTS	IN CONTACT AREA: 1.2 μ m MIN. SEL. GOLD OVER 1.2 μ m MIN. NICKEL SOLDER TINES: 2.5 μ m MIN. TIN-LEAD OVER 1.2 μ m MIN. NICKEL	HOUSING COLOR BLACK: PBT, UL 94 V-0 CONTACT INSERT: PBT, UL 94 V-0 CONTACTS: Ph-BRONZE	215876-2
PACKAGING	REMARKS	FINISH	MATERIAL	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN G.CONSTANT 24 SEP 96	Tyco Electronics Oostkamp - Belgium	
DIMENSIONS: mm		CHK G.CONSTANT 24 SEP 96	NAME MODULAR JACK, SIDE ENTRY, 6/4 FOR PRINTED CIRCUIT BOARD	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R.SMEETS	SIZE A2	
0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES FINISH		PRODUCT SPEC APPLICATION SPEC WEIGHT	CAGE CODE 00779	
MATERIAL		CUSTOMER DRAWING	DRAWING NO C=215876	
		SCALE 4:1	RESTRICTED TO -	
		SHEET 2	REV V1	