

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at <u>www.hestore.hu</u>.



Accessories

Primary adapters GPP system



Primary adapters MPP system



Secondary adapters



Power cords



Primary adapters

The GPP/MPP-series can be variably equipped with the mains plugs as shown. Your applications and products can be sold and used worldwide due to the set of all country mains plugs which can be inserted with the unit.

Mobility and dependability with respect to the use of the product are increased in this way and provide a constant level of functionality and availability – wherever you are in the world. Beyond that, these plug modules help reducing the logistic complexity, avoiding the need to plan and stock mains adapters and chargers in various mains plug configurations.

In countries with mains plugs which are not covered by EURO, UK, USA/Japan and Australia mains plug types, the IEC adapter with the 2-pin IEC 320 C8 socket provides a standardized alternative.


Secondary adapters

FRIWO delivers all standard units with a round lead of 1.83 m length, and our well-proven secondary adapter system. Depending on the required output voltage, the wire diameter is between 0.25 mm² (AWG30) and 1.31 mm² (AWG16). Suitable for the FRIWO standard lead, we have a broad system of secondary output plugs, containing coaxial plugs (acc. to DIN 45323) and jack plugs (acc. to DIN 45318). The required polarity can be chosen by turning the output plug.

Needless to say, that FRIWO offers the possibility to mount customer specific output leads. According to the individual requirements, both round and flat cables with the relevant diameter can be used. Upon request, customised or special versions, and other types of low voltage plugs can be equipped.

Power cords

Mains power cords with the 2 contact IEC 320 C 7 mains plug provide the specific solution for each country. All power cords are 2 metres long and suitable for use with our IEC 320 C8 socket for FRIWO'S MPP/GPP and DT lines.

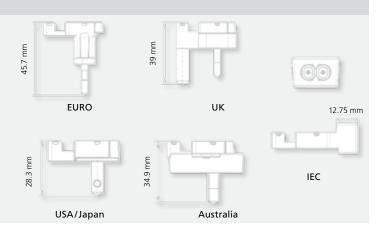

υĸ

27 mm

IEC

1822478

1822558

1822482

1822560

1822479

1822480

1822476

1822477

1822481

1822562

9.5

9.5

11.0

9.5

9.5

11.5

14.0

9.5

11.5

9.5

DIN 45323 1822483

Primary adapter	GPP	
Country	Order No.	
EURO	1827417	
UK	1827420	
USA/Japan	1827422	
Australia	1827425	
IEC	1827428	
Korea	1830162	
Argentina	1831610	
India	1831323	
China	1830164	
Brasil	1830859	

Primary adapter	МРР	
Country	Order No.	
EURO	1717707	
UK	1717618	
USA/Japan	1717715	
Australia MPP 15	1800496	
Australia MPP 6/30	1804237	
IEC	1809281	
Korea	1832029	

Stra	ight jack con	nectors	Connectors/Sockets	6
Ø out.	Length mm	Order No.	Desription	Order No.
2.5	13	1807704	Texas connector	
3.5	14	1807705	Straight Texas connector	1807706
			Angled Texas connector	1822486
Ang	gled jack con	nectors		
2.5	13	1822484	Texas sockets 2-pin	
3.5	14	1822485	Snap in type	1323938
			PCB type	1321609
			Texas sockets 3-pin	
			Snap in type	1327259
			PCB type	1363506

Power cords	
Country	Order No.
EURO	1812274
UK	1812275
USA/Japan	1812276
Australia	1812277

USA/Japan Australia Straight coaxial connectors Angled coaxial connectors Ø out. Ø in. Length mm Order No. Ø out. Ø in. Length mm Order No. 3.5 1.3 9.5 1807699 3.5 1.3 4.0 1.7 9.5 1822557 4.0 1.7 1811994 1.7 4.0 1.7 11.0 4.0 4.8 1.7 9.5 1822559 1.7 4.8

1807700

1807701

1807697

1807698

1807702

1822561

5.5

5.5

5.5

5.5

5.5

5.5

2.1

2.1

2.1

2.5

2.5

3.3

28.3 mm

32 mm

39 mm

29.25 mm

5.5

5.5

5.5

5.5

5.5

5.5

2.1

2.1

2.1

2.5

2.5

3.3

9.5

11.5

14.0

9.5

11.5

9.5

DIN 45323 1807703

EURO

