


EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at <u>www.hestore.hu</u>.


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.





* UNLESS OTHERWISE SPECIFIED TOLERANCES ON DECIMAL IS: UNIT: MM .X ± 0.38 .XX ± 0.25



COMPLIANT



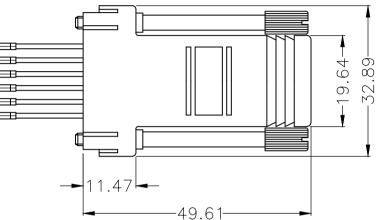



А	1	2	3	4	5	6
Color	Black	Yellow	Orange	Red	Green	Brown

SPECIFICATION: 1.PLASTIC:ABS. 2.SCREW:4-40 NICKEL PLATING THUMB SCREW. 3.LEAD WIRE: UL 1061,26 AWG,7 STRAND. 4.TERMINAL: COPPER, GOLD PLATING.

Order	Information	Unshielded Version			
Size P/N-Kitted		Product Code			
9–Way	2112-0100-11	MHDA09-PMJ6-K-RC			

-wdy ziiz-uiuu-ii mhdaus	J-PMJO-K-RC					
		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MH CONNECTORS LTD. AND SHALL NOT BE REPRODUCED. COPIED OR USED AS THE BASIS FOR	DRAWN HALEY		DATE 10-11-13	
		THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	APPROVED		DATE	
THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2002/95/EC		MH CONNECTORS LTD.	SCALE	SHEET 1 OF	OF 1	REV: 1.0
AND 2002/96/EC FOR RoHS COMPLIANCY.			DRAWING No MH	DA09-PMJ	l6-K-RC	