




EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

DHP9F SERIES D-SUB FEMALE RIGHT ANGLE TYPE 9.4 MM

Specification:

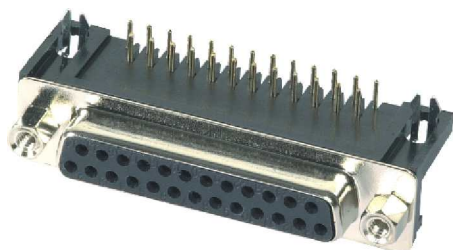

- 1) Insulator: Thermoplastic
- 2) Contact: Copper Alloy, Gold Plated
- 3) Shell: Copper Alloy
- 4) Storage Temperature: -20°C ~ 70°C
- 5) Operating Temperature: 0°C ~ 85°C
- 6) Contact Resistance: 20 mΩ max. (initial)
- 7) Insulation Resistance: 1000 MΩ min.
- 8) Dielectric Withstanding Voltage: 1000 VAC (1 minute)

Series No.	No. of Contact (N)	B	C	D
DHP9-09F	9	25.0	30.8	16.3
DHP9-15F	15	33.3	39.1	24.7
DHP9-25F	25	47.0	53.0	38.4
DHP9-37F	37	63.5	69.3	54.8

