
EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

CLIFF

ISS.	AMEND	DATE
1	WAS ON FC68147	15/06/15

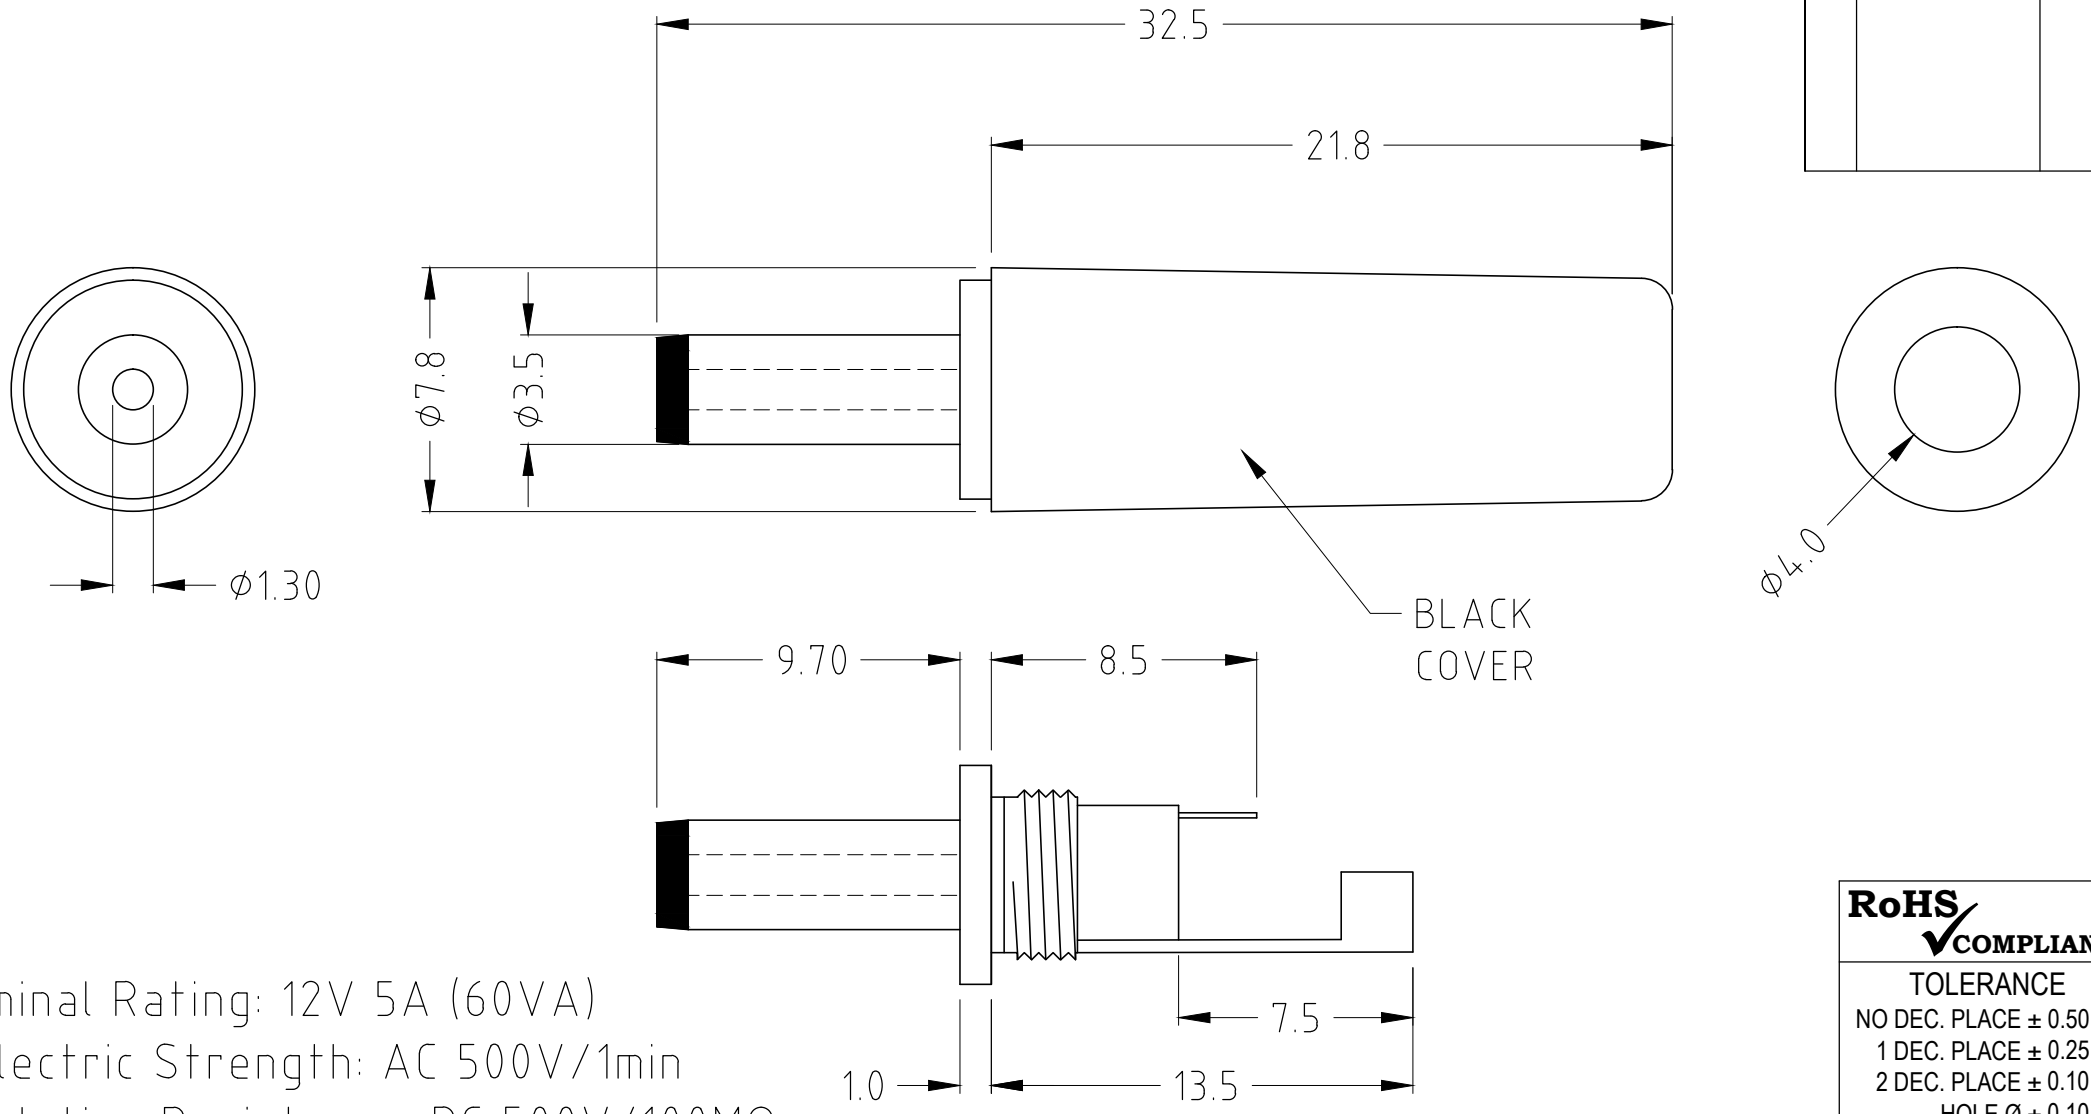

Nominal Rating: 12V 5A (60VA)
Dielectric Strength: AC 500V/1min
Insulation Resistance: DC 500V/100MΩ

RoHS COMPLIANT

TOLERANCE
NO DEC. PLACE ± 0.50
1 DEC. PLACE ± 0.25
2 DEC. PLACE ± 0.10
HOLE Ø ± 0.10
ANGLES ± 1/2°
UNLESS
OTHERWISE STATED

Cliff Electronic Components Ltd.
76 Holmethorpe Avenue, Holmethorpe Industrial Estate,
Redhill, Surrey, RH1 2PF, England, UK
Tel: 01737-771375 Fax: 01737-766012 Website: www.cliffuk.co.uk

THE CONTENTS OF THIS DOCUMENT MUST NOT BE COPIED OR DISCLOSED TO A 3rd PARTY WITHOUT WRITTEN PERMISSION OF CLIFF UK. © 2015

DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE STATED. WORK TO DIMENSIONS. REMOVE ALL BURRS. IF IN DOUBT ASK.

3rd ANGLE PROJECTION:

DO NOT SCALE

MATERIAL: ABS / POM / BRASS

FINISH: AS MOULDED / Ni PLATED

DRAWN: T.J.O.

APPROVED: D.P.J.

TITLE: DC CONNECTOR DCPP3 Ø1.30 (FLANGED)

DRWG. No. FA67555

FORM: A4DRWGH