



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.




DEGSON ELECTRONICS CO., LTD.

Product Specification



DG242V-5.0
DG242V-5.08

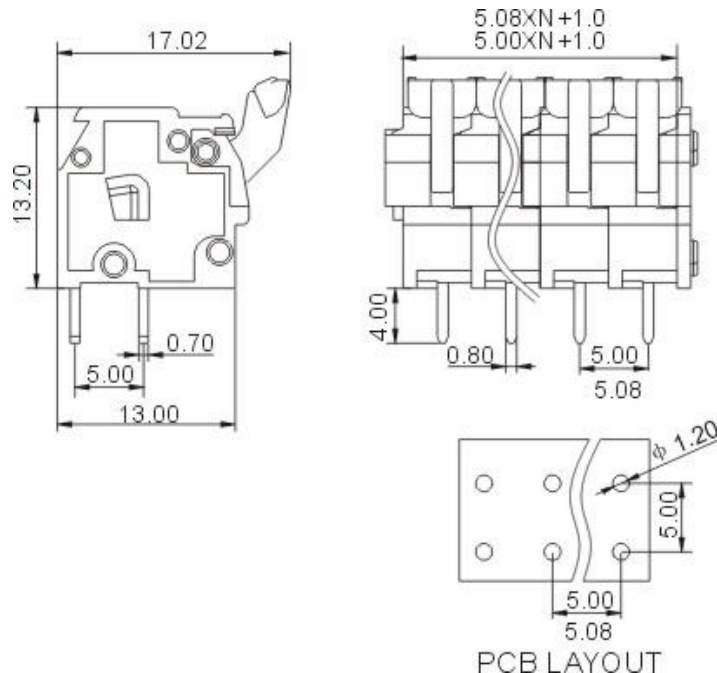

Approval



Electrical

Standard

UL

IEC

Rated voltage

300V

450V

Rated current

15A

17A

Wire range

28-12AWG

0.2-2.5mm²

Withstanding voltage

AC2500V/1Min

Mechanical

Ambient temperature

-40°C~+105 °C

Strip length

5-6mm

Dimensions

Pitch

5.0mm(.197") 5.08 (.200")

Poles

1P-XXP

Material

Housing

PA66,UL94V-0

Pin header

Phosphor bronze,Tin plated


Wire guard

Stainless steel

HOW TO ORDER :

	-			P	-	1		-	X	X	X
									Customer Request		
Series number	No. of pole	Pitch	Color								
		1	Single pitch	1	Grey	4	Green	7	Trans		
		2	Double pitch	2	Blue	5	Orange	8	Yellow		
				3	Black	6	Red	9	White		

mm
(INCH)



THIRD ANGLE PROJECTION



DEGSON ELECTRONICS CO., LTD.

NAME

DG242V-5.0, DG242V-5.08