

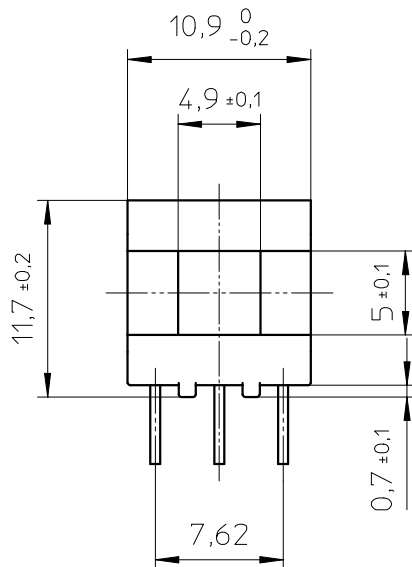
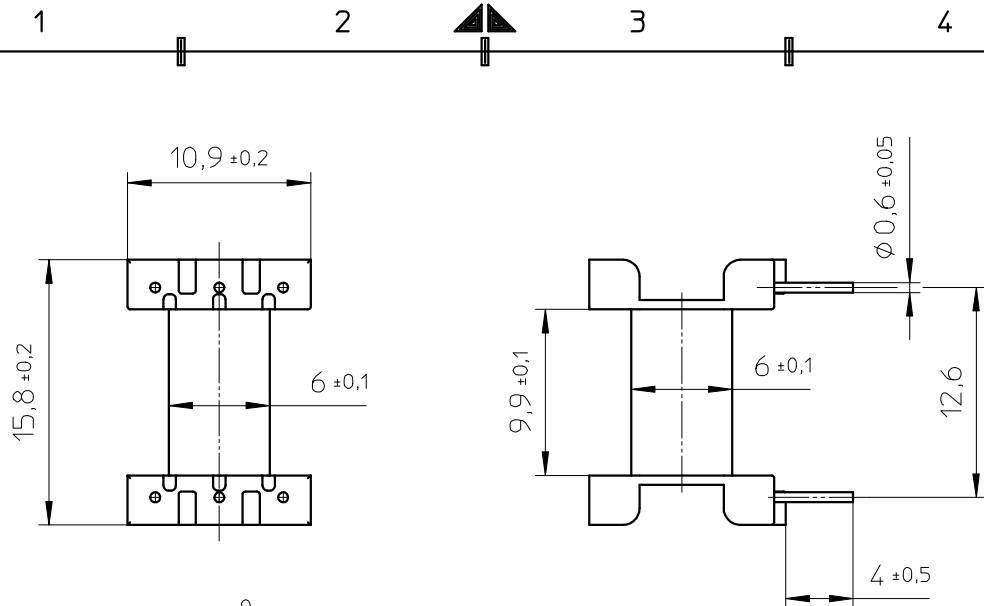






EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

FERROXCUBE



Hole pattern:

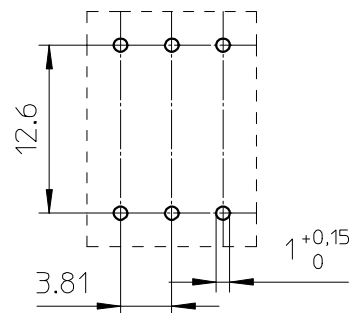

Coil former material: Sumikon PM-9820 (PF), glass-reinforced.
 UL file number: E41429 - UL94V-0.
 Pin material: Copper-clad steel, Sn plated.
 Max. operating temp.: acc. to IEC 60 085 class H, 180°C.
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s
 Min. winding area: 22.5 mm²
 Mean length of turn: 33.9 mm.

CLASS.NO.		CSH-E16/8/5-1S-6P-C				4322 021 04071				2002-03-28		
										2003-08-13		
										2003-08-13		
										2005-03-11		
NAME NAAM	Tjon		SUPERS. VERV.		1 SH BL.		112 - 001		010		A4	
MPA		CHECK CONTR.	DAT. 02-03-28		Property of Eigendom van		© FERROXCUBE 2000					