



EN: This Datasheet/Document is presented by the manufacturer.


Please visit our website for pricing and availability at www.hestore.hu.

SPECIFICATIONS

(Typical values for batteries stored at 20°C for one year)

Nominal Capacity(At 1mA/20°C/68°F/2.0V Cut-Off)	1.2 Ah
Open Circuit Voltage(At 20°C/68°F)	3.67 V
Nominal Voltage(At 1mA/20°C/68°F)	3.6 V
Maximum Continuous Current	50 mA
Maximum Pulse Current Capability	100 mA
Rated 1 Sec. Pulse Capability(To 3V)	20 mA
Operating Temperature Range	-55 ~ 85 °C
Weight	9.2 g(0.324 oz)
Anode Surface Area	6 cm ²
Volume	4.3 cm ³
Diameter(Max)	14.5 mm
Height(Max)	25.2 mm


Dimensions in mm

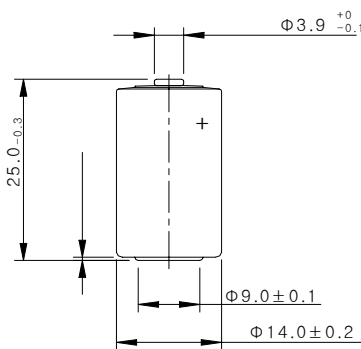


WARNING
Fire, Explosion And Severe Burn Hazard.
Do Not Recharge, Crush, Disassemble,
Heat Above 212°F(100°C), Incinerate
Or Expose Contents To Water

Voltage(V)


DISCHARGE CHARACTERISTICS AT +20°C

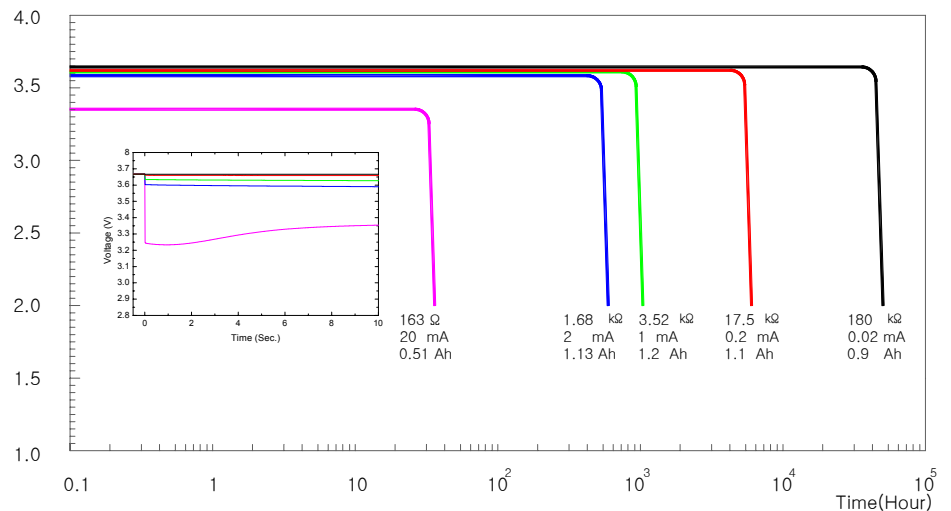


CAPACITY vs. CURRENT

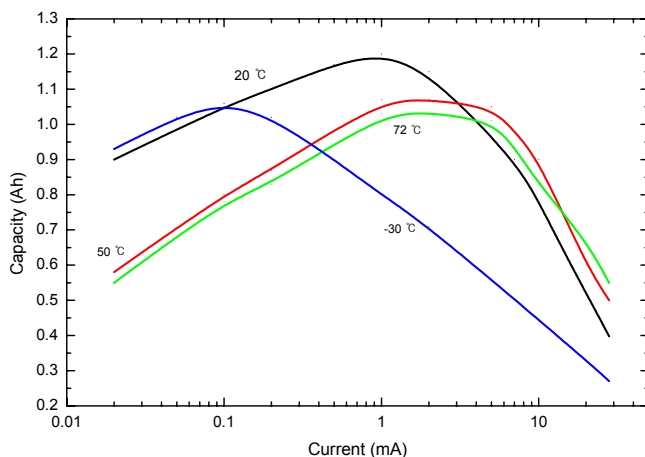


TEMPERATURE vs. OPERATING VOLTAGE

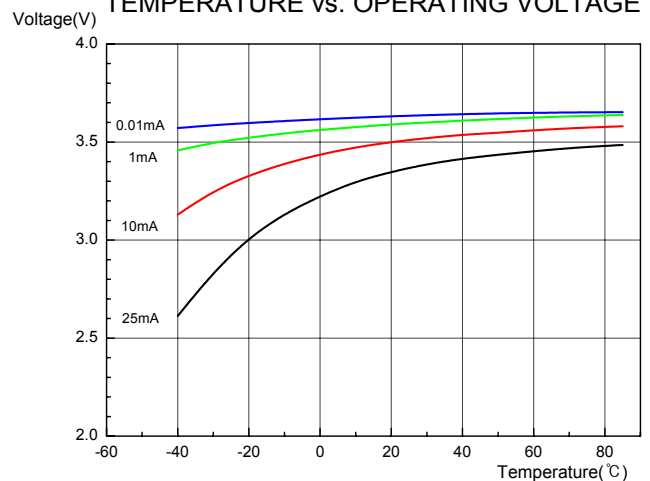


1. STD Terminal

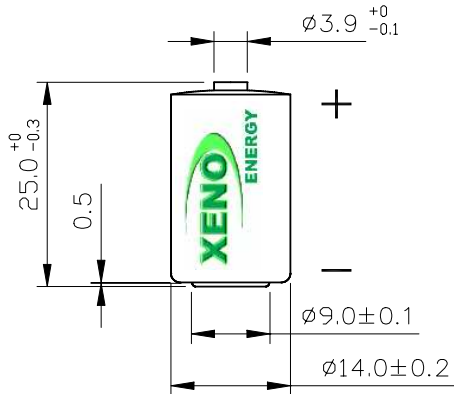


2. CASE

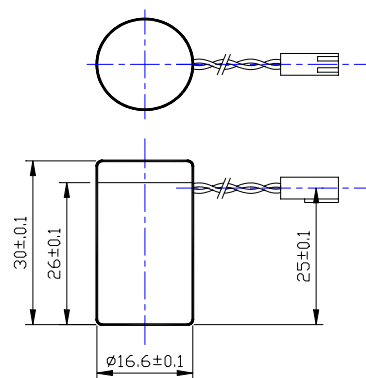


3. Connector

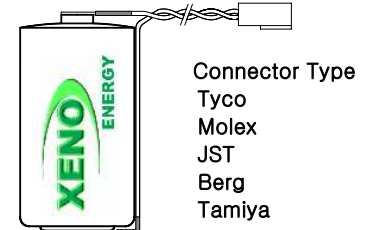


4. AX Terminal

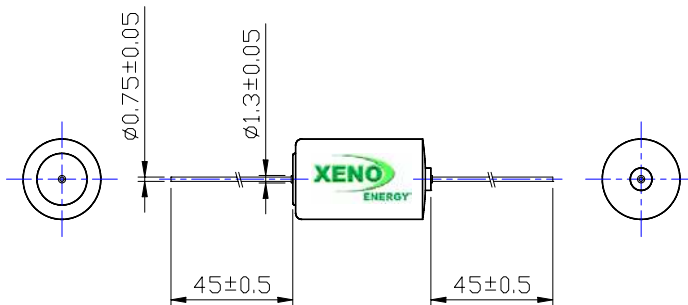


5. T1 Terminal

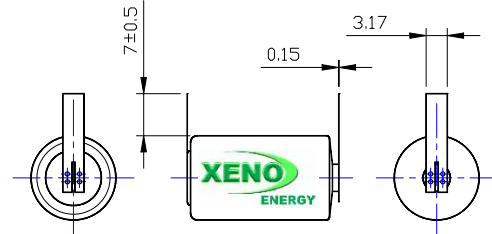


6. T2 Terminal

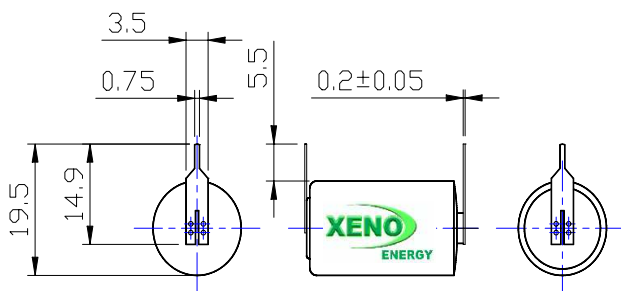

7. T3 Terminal

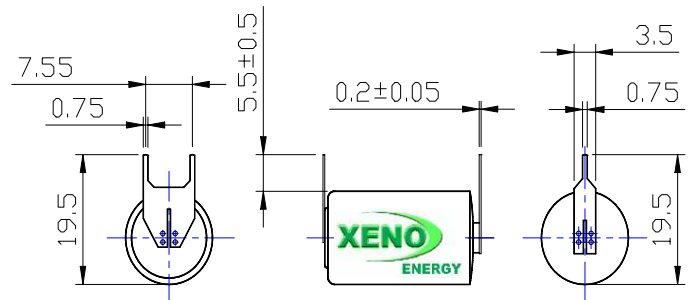

8. T3 EU Terminal

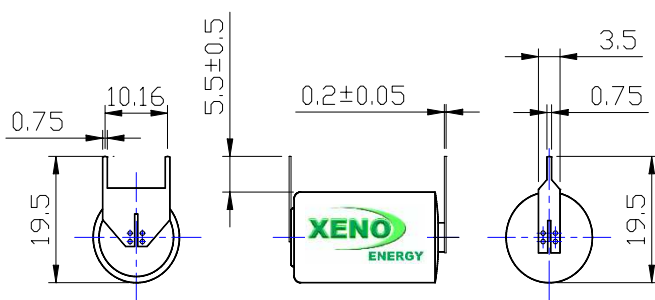

9. T3 EU/R Terminal

