




EN: This Datasheet/Document is presented by the manufacturer.


Please visit our website for pricing and availability at www.hestore.hu.

ISS.	AMEND	DATE
1	1st DRAWN	21/11/12
2	MAT + SPEC ADD	04/08/14
3	ERR 1400V WAS W	12/12/14

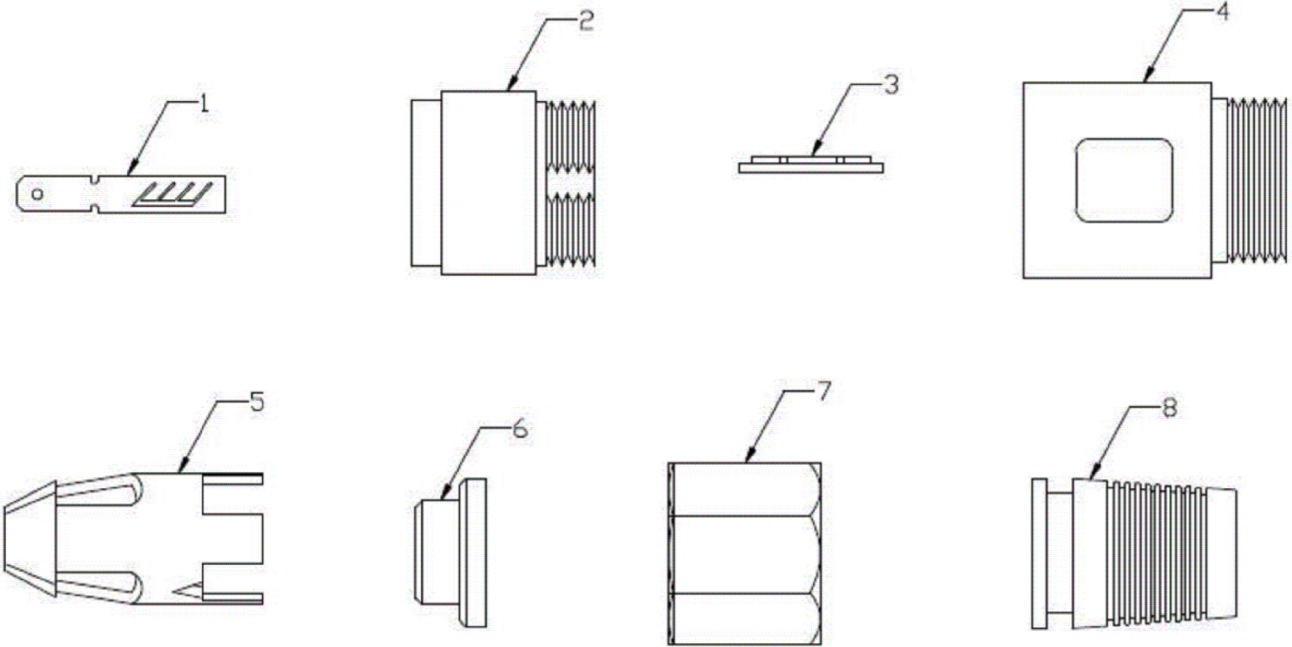

ITEM	MATERIAL	FINISH
1	COPPER ALLOY	SILVER PLATED
2	POLYAMIDE	BLACK
3	PC	BLACK
4	POLYAMIDE	BLACK
5	PC	BLACK
6	ABS	BLACK
7	ABS	BLUE
8	PVC	BLACK

SPECIFICATIONS	
Withstanding Voltage	≥ 1400V
Insulation Resistance	≥ 1G Ω
Contact Resistance	≤ 3m Ω
Solderability	≤ 3S
Insertion Force	10-80N
Minimum Life	≥ 2000

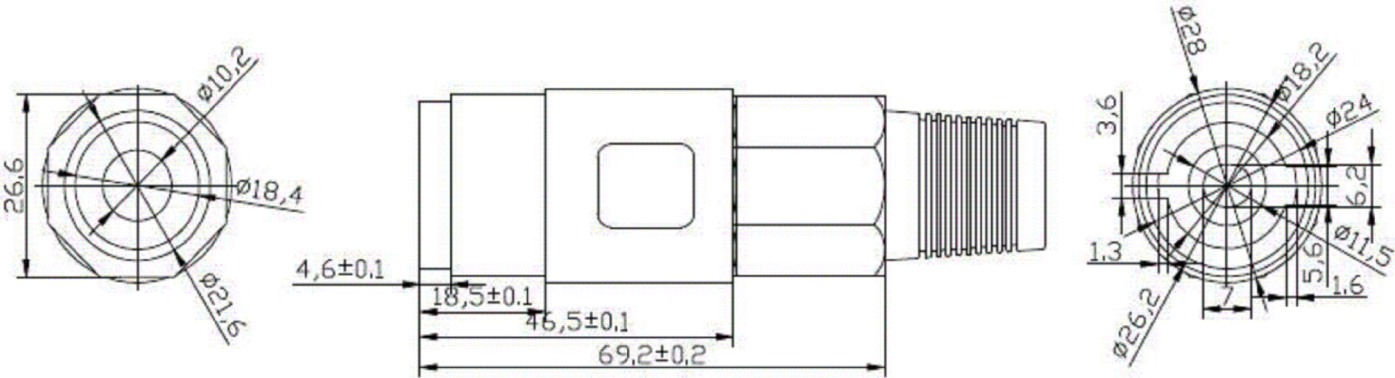

NOTE: 1st ANGLE PROJECTION

RoHS
COMPLIANT

TOLERANCE
NO DEC. PLACE ±
1 DEC. PLACE ±
2 DEC. PLACE ±
HOLE Ø ±
ANGLES ±
UNLESS
OTHERWISE STATED

DO NOT SCALE