



**HESTORE.HU**

elektronikai alkatrész áruház



**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

## Plugs

### LAS S WS

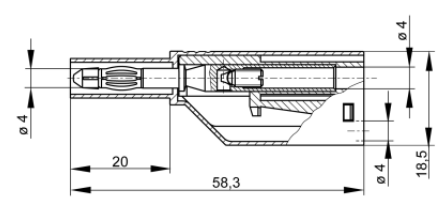

Product	LAS S WS
description	Safety connector for tower construction with screw connection for leads from 0.5 mm <sup>2</sup> to 1.5 mm <sup>2</sup> , outer diameter of lead max. 4.2 mm. Plug 4 mm with caged spring, rigid socket 4 mm, 1000 V-system. Simple assembly by "Click-System".
operating instruction	BA461
article-no. / *colour	9340991xx  00 black   01 red   02 blue   03 yellow   04 green   05 brown   06 gray   07 white   09 violet <span style="border: 1px solid black; padding: 2px;">Ni</span>
drawing	
technical data	
connection	screw terminal
rated voltage <sup>(1)</sup>	AC/DC 1000 V
measurement cat. acc. to IEC 61010	CAT II
rated current <sup>(1)</sup> (consider derating curve)	24 A
material plug	brass, nickel plated
housing material	PA
temperature range acc. To IEC61010 <sup>(2)</sup>	-15 °C to +70 °C
flammability class acc. to UL 94 (only valid for basic material of housing)	V-2
standard	IEC 61010

<sup>(1)</sup> for normal environmental conditions -5°C to +40°C

<sup>(2)</sup> contact the manufacturer for applications at deviating temperature ranges  
stand: 28.01.2019