


EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.



Installation instructions for FM-106 family of Surface Mount - Door and Window Contacts

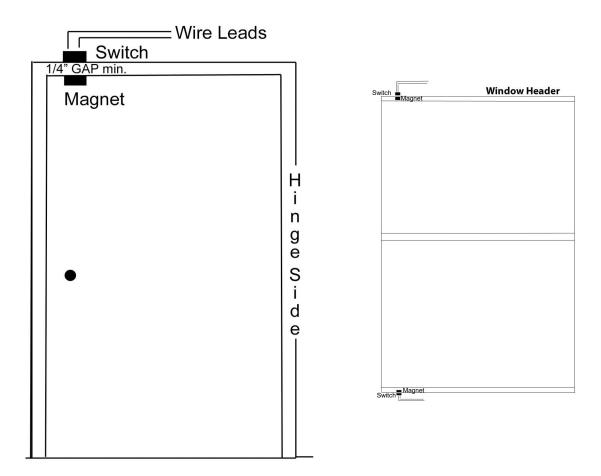

Surface mount switch at top or side (NOT on hinge side) of door or hinged window frame On double hung window, surface mount the switch at top, side or bottom of window frame Surface mount the magnet parallel to the switch

Make sure Gap is not less than 1/4" between switch and magnet Splice leads from switch into alarm circuit NOT for use with Steel doors and windows

WWW.TANEALARM.COM

906 Jericho Turnpike New Hyde Park, NY 11040 Tel: 516-328-3351 800-852-5050

Fax: 516-326-9125 Email: info@tanealarm.com