

EN: This Datasheet/Document is presented by the manufacturer.


Please visit our website for pricing and availability at www.hestore.hu.

FOR 客户名称	APPROVED 客户确认签字	ATTN 销售负责人

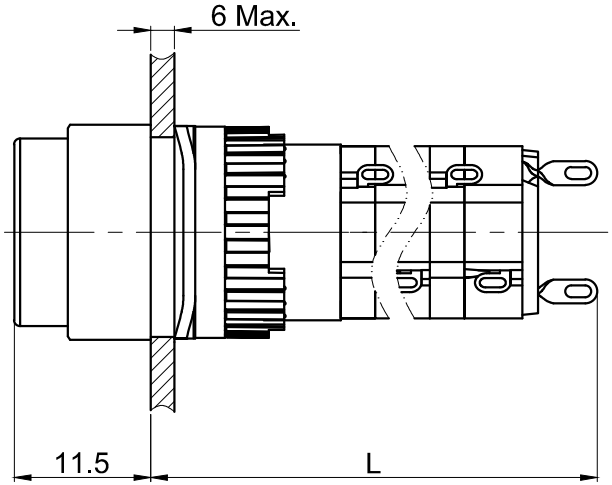


1NO 1NC L=29
2NO 2NC L=36.5






PANEL CUTOUT
MAX.PANEL THICKNESS
6mm



Seal Ring

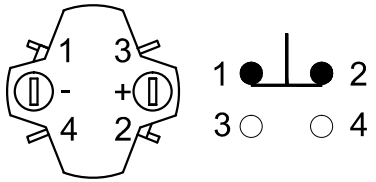

Contact Composition
1、2、3、4 are one set;
1,2 are normal closed(NC);
3,4 are normal opened(NO).

Part Number:LAS1Y- □Y/◇

"□"	Contact structure
11	1NO1NC
22	2NO2NC

"◇"	Operation position
2	Two Position L R

SPECIFICATIONS:
1.Switch Rating: AC220V/2A, DC220V/0.1A.
2.Mechanical Life: ≥500,000cycles.
3.Electrical Life: ≥50,000cycles.
4.Contact Resistance: ≤50mΩ.
5.Insulation Resistance: ≥100MΩ.
6.Dielectric Strength:
Between terminals of the same pole: AC 1,500V, RMS 50Hz, 1min;
Between terminals of different pole: AC 2,000V, RMS 50Hz, 1min.
7.Operating Temperature: -25℃～ +55℃(No Freezing).
8.IP Class: IP40.
9.Terminal Type: Pin Terminal(2 x 0.4mm).

MATERIALS:
1.Contact: Silver alloy.
2.Button: PC.
3.Body: PC.
4.Base: UF.

DIMENSIONS	TOLERANCE
0.00 TO 18.00mm	±0.43mm
18.01 TO 30.00mm	±0.52mm
30.01 TO 50.00mm	±0.62mm
50.01 TO 80.00mm	±0.74mm

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.

BRAND 品牌 ONPOW

红波按钮制造有限公司
ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.

USED 用途		APPD 审核	CH 2020/05/03
FINISH 处理		CHKD 校对	NCH 2020/05/03
SCALE 比例	1.6 / 1	UNIT 单位	mm
DR. 制图	ZPD 2020/05/03		
TITLE 名称	LAS1 Series Pushbutton Switches		
DWG NO. 图号	LAS1Y- Y	SIZE 图纸	A4
FILE NAME 档案名称	LAS1-Y.DWG	SHEET 张	1 / 1
REV. 更改	1		