




EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

PRODUCT SPECIFICATION

Part Number	Flat Flex Cables			Rev	A		Date	07/07/23
Product Description	FFC general product specification						Page	1
Doc Number	FFC_PS	Prepared	YR	Checked	KL	Approved	PH	

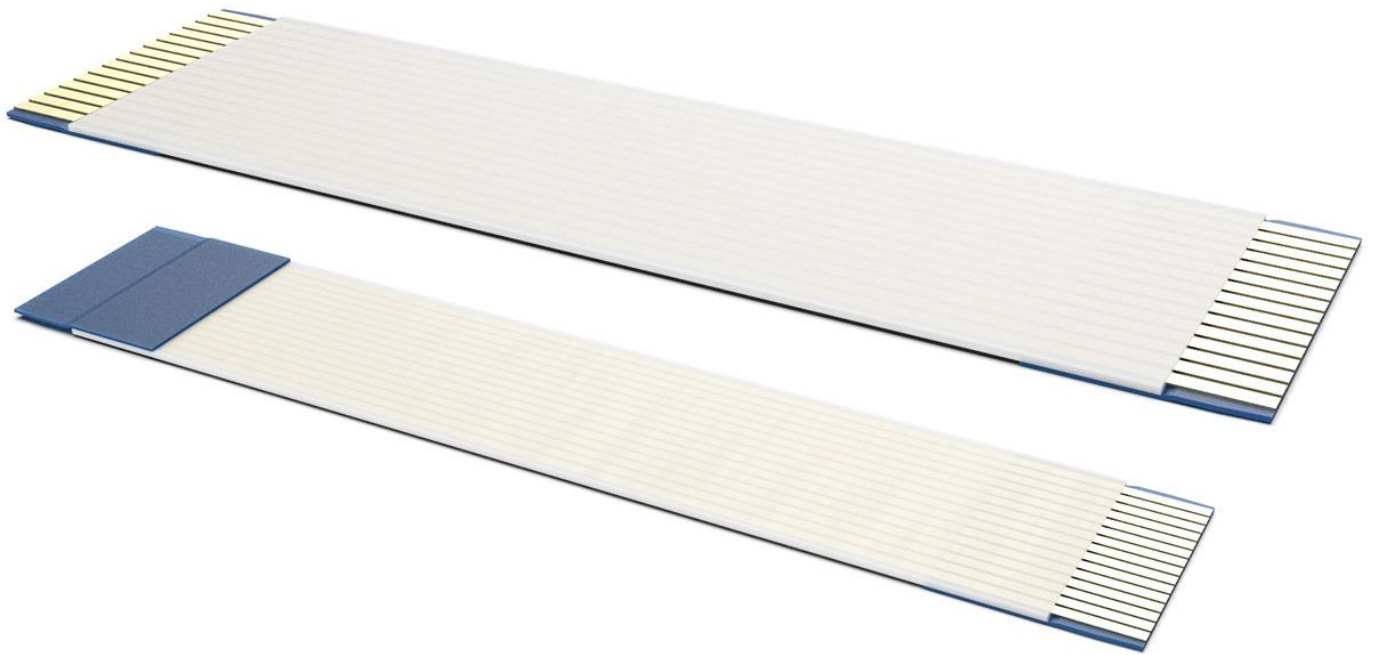

PRODUCT SPECIFICATION

Part Number	Flat Flex Cables			Rev	A		Date	07/07/23
Product Description	FFC general product specification						Page	2
Doc Number	FFC_PS	Prepared	YR	Checked	KL	Approved	PH	

1. SCOPE

This specification covers tolerances and characteristics of standard Flat Flex Cables, applicable to FFC Cable drawing rev.B or later.

2. GENERAL TOLERANCES

No.	Description	Size (mm)	FFC pitch & tolerance (mm)	
			0.5	1.0
1	Overall Length (L)	≤50	±1.5	
		51 – 100	±2	
		101 – 300	±3	
		301 – 800	±5	
		>800	±1%	
2	Conductor Thickness	0.035	±0.005	
		0.05	±0.005	
		0.1	±0.01	
3	Conductor Width	0.3	±0.03	
		0.65	±0.03	
4	Pitch	0.5	±0.05	
		1.0		±0.05
5	Cable Width (W)	0.5	±0.08	
		1.0		±0.1
6	Exposed Conductor Length	≤6	±1	
7	Support Strip Length	4 – 6	±1	
		6 – 7	±1.5	
		>8	±2	

PRODUCT SPECIFICATION

Part Number	Flat Flex Cables			Rev	A		Date	07/07/23
Product Description	FFC general product specification						Page	3
Doc Number	FFC_PS	Prepared	YR	Checked	KL	Approved	PH	

3. CHARACTERISTICS

	Item	Test Condition	Requirement
Electrical	Conductor Resistance (0.5mm pitch)	JIS-C-3102 (at 20°C)	2.2Ω/m Max.
	Conductor Resistance (1.0mm pitch)		1.1Ω/m Max.
	Insulation Resistance	Apply 500Vdc for 1 min	1000MΩ Min
	Rated Current (0.5mm pitch)	-	0.5A
	Rated Current (1.0mm pitch)	-	1.0A
	Dielectric Strength	500Vac, 0.5mA, 1 min, adjacent conductors in air 1000Vac, 0.5mA, 1 min, adjacent conductors in water	No breakdown
	Continuity	DC3V tester	No open circuit with each conductor, no short circuit to adjacent conductors
	Rated Voltage and Temperature	UL 758	60V, +80°C or +105°C depending on UL style
Physical	Operating Temperature	Fixed wiring	-40°C to +80°C or +105°C depending on UL style
	Flammability	UL 758 VW-1	Pass
	Resistance to Heat	+85°C or +110°C (depending on UL style) for 96hrs	No negative impact on insulation resistance or dielectric strength
	Resistance to Humidity	+40°C, 95% RH for 96hrs	No negative impact on insulation resistance or dielectric strength

PRODUCT SPECIFICATION

Part Number	Flat Flex Cables			Rev	A	Date	07/07/23
Product Description	FFC general product specification					Page	4
Doc Number	FFC_PS	Prepared	YR	Checked	KL	Approved	PH

	Temperature and Humidity Cycling	-40°C (0% RH) → +25°C (65% RH) → +85°C (95% RH) → +25°C (65% RH), 5 cycles	No negative impact on insulation resistance or dielectric strength
	Flex Life (Folding Test)	600g weight, 0.5mm R, 180°, 60 cycles/min	100 cycles Min.
	Flex Life (Reciprocating Test)	10mm R, 180mm stroke, 70 cycles/min	100,000 cycles Min.
	Abrasion	Ø0.5mm, 600g, 60 cycles/min	100,000 cycles Min.
	Insulation Elongation	JIS-K-6732	70% Min.
	Insulation Tensile Strength		3.5kg/mm ² Min.
	Adhesive Strength	Between conductor and insulator	0.2kg/cm Min.
		Between insulator and insulator	0.6kg/cm Min.
		Between support strip and insulator	0.2kg/cm Min.
	Durability	Insertion and withdrawal	30 cycles Min.

PRODUCT SPECIFICATION

Part Number	Flat Flex Cables			Rev	A		Date	07/07/23
Product Description	FFC general product specification						Page	5
Doc Number	FFC_PS	Prepared	YR	Checked	KL	Approved	PH	

Revision details:

Revision	Information	Page	Release Date
0.1	Initial draft	-	23/06/2023
0.2	Revised draft	-	05/07/2023
A	Formal release	-	07/07/2023