

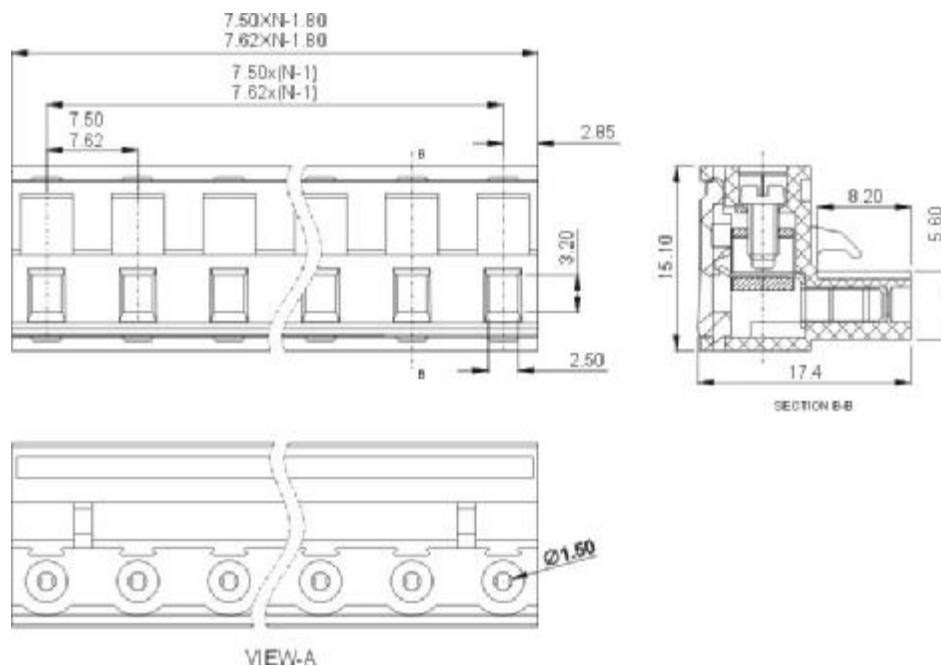


EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.





2EDGK-7.5
2EDGK-7.62



APPROVAL	 	
Electrical		
Standard	UL	IEC
Rated voltage	300V	400V
Rated current	15A	20A
Wire range	28-12AWG	2.5mm ²
Withstanding voltage	AC2500V/1Min	
Mechanical		
Torque	0.4Nm(3.5Lb-In)	
Ambient temperature	-40℃~+105℃	
Strip length	7mm	
Dimensions		
Pitch	7.5mm(.295") 7.62mm(.300")	
Poles	2P-12P	
Material		
Housing	PA66,UL94 V-0	
Screws	M2.5,Steel, Cr ³⁺ Zn-plated	
Contact	Phosphor bronze	
Cage	Brass,Ni-plated	

HOW TO ORDER :

	-			P	-	1		-	X	X	X	
									Customer Request			
Series number		No. of pole							Color			
									1	Grey	4	Green
									2	Blue	5	Orange
									3	Black	6	Red
											7	Trans Parent
											8	Yellow
											9	White

	 DEGSON ELECTRONICS CO., LTD.
	NAME 2EDGK-7.5 2EDGK-7.62