



HESTORE.HU

elektronikai alkatrész áruház


EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

产品参数表 Product Specification

TX Ultimate

智能触摸墙壁开关/Smart Touch Wall Switch

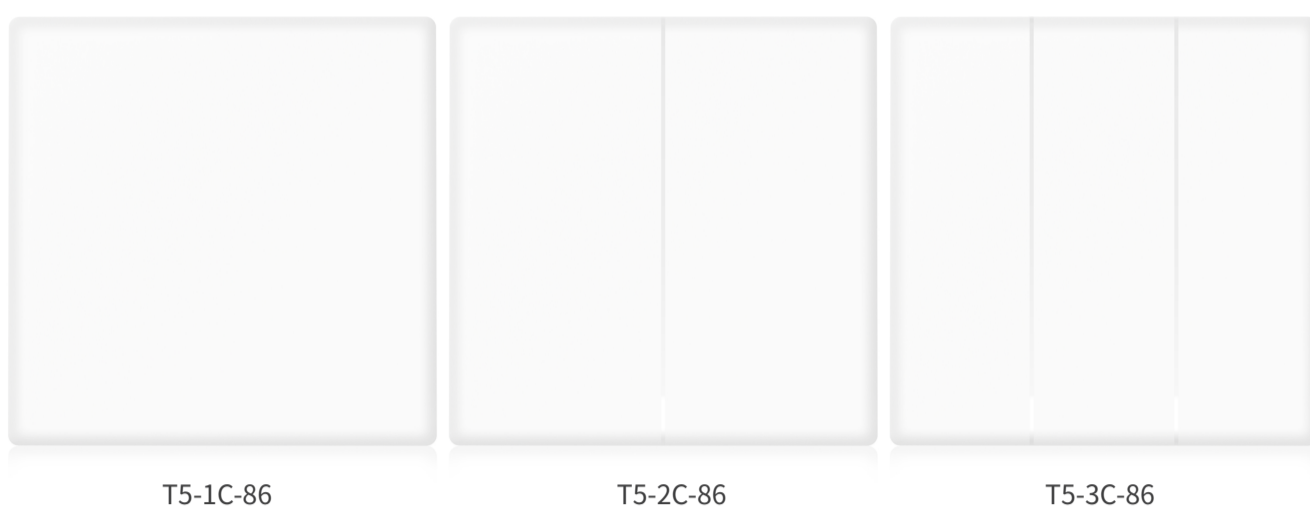

T5-1C-86

T5-2C-86

T5-3C-86

基本信息 Basic Information

产品系列 Product series	TX Ultimate
产品类型 Type	墙面开关 Smart Wall Switches
产品型号 Model	T5-1C-86/T5-2C-86/T5-3C-86
输入 Input	1C: 100-240V ~ 50/60Hz Max 5A 2C: 100-240V ~ 50/60Hz Max 10A 3C: 100-240V ~ 50/60Hz Max 15A
输出 Output	1C: 100-240V ~ 50/60Hz Max 5A 2C: 100-240V ~ 50/60Hz Max 5A/Gang 10A/Total 3C: 100-240V ~ 50/60Hz Max 5A/Gang 15A/Total
最大功率 Max. power	1C: 1200W Max@240V 2C: 1200W Max@240V/Gang,2400W/Total 3C: 1200W Max@240V/Gang,3600W/Total
LED负载 LED load	1C: 150W Max@240V,75W Max@100V 2C: 150W Max@240V/Gang,75W Max@100V/Gang 3C: 150W Max@240V/Gang,75W Max@100V/Gang
通道 Gang	1-Gang/2-Gang/3-Gang
MCU	ESP32
产品认证 Certification	CE/SRRC/RoHS

外观信息 Appearance

产品颜色 Color	白色 White
产品规格 Product dimension	86x86x39mm
包装规格 Package dimension	124.5x101x45.5mm
产品净重 Net weight	1C: 164g/2C: 168.5g/3C:174g
总重量 Total weight	1C: 232g/2C: 236.5g/3C: 242g
外壳材质 Casing material	PC+CRS

功能特性 Features

产品特点 Functions	SONOFF TX Ultimate 是一款带LED灯的智能触摸墙面开关, 开关时会伴随声音、灯光以及震动效果。在易微联APP配对成功后, 可以在智能手机上远程控制开/关、切换氛围灯模式、设置定时或者智能场景。 SONOFF TX Ultimate is a smart touch wall switch with LED lights which will produce sound, light and vibration effects when it is turned on/off. After adding in the eWeLink App, you can remote control on/off, switch the ambient lighting modes, set timer and smart scene on the phone.
App 支持系统 App operating systems	Android & iOS

无线标准 Wireless standard

Wi-Fi	IEEE 802.11 b/g/n20/n40 2.4GHz(2400MHz-2483.5MHz)
蓝牙 Bluetooth	4.2 BLE(2400MHz-2483.5MHz)
天线 Antenna	内置FPC天线 FPC board with antenna
安全机制 Security mode	WPA/WPA2
加密类型 Encryption type	TKIP/WEP/CES

使用环境 Working Condition

适用场所 Applicable place	室内使用 Indoor
工作温度 Working temperature	-10°C ~ 40°C
工作湿度 Working humidity	5%-95%RH, 无冷凝 5%-95%RH, non-condensing
工作海拔 Working height	2000米以下 Less than 2000m

安装信息 Installation

设备安装 Installation metho	嵌入暗盒上 Embedded mounting box
固定模式 Installation type	通过螺钉固定 Screws installation
接线方式 Wiring way	零火 N and L
接线索径范围 Wire diameter	1mm ² -4mm ² AWG17-AWG11