



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	HP 22/06/05		

NOTES:


1. SPECIFICATIONS

- . Contact Resistance: 50mΩ max
- . Insulator Resistance: 100MΩ min.
- . Current Rating: 1.5A per pin max.
- . Rated Voltage: 30V DC
- . Dielectric withstanding voltage: AC 100V For 1 minute
- . Contact: Copper Alloy
- . Housing: Thermoplastic(UL 94V-0)

2. PRODUCT NUMBER CODE:


DS1106 - X X X

- Contact plating
 - 0: Selective gold flash
 - C: Selective 3u" gold
- Shell plating
 - N: Nickel
 - 6: Tin
- Color of housing
 - B: Black

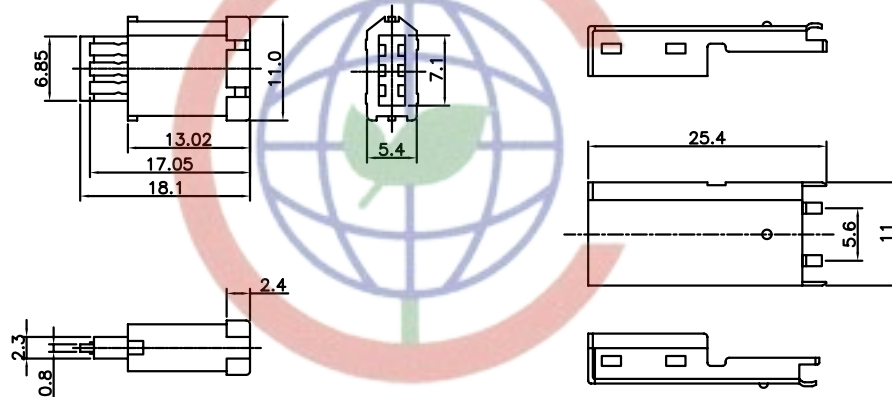

Housing with contact

Upper shell

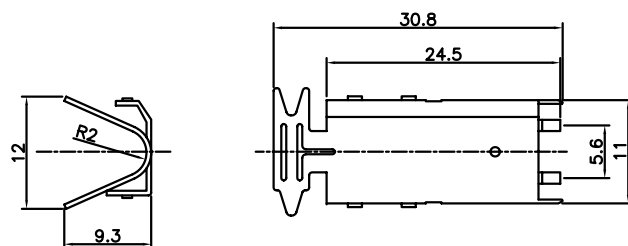

Down shell

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS		IEEE 1394 6PIN MALE SOLDER TYPE	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1106
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY ELECTRONIC CO. LTD			
SCALE		1:1	SHEET 1 OF 1				
DRAWING NO.		C-DS1106-XXX					

Tel: 86-574-63508787

Fax: 86-574-63510817

E-mail: sales@zhengxin.com.cn

http://www.zhengxin.com.cn

West Town Cixi Ningbo China

P.O:315321